



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 390

### PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573


Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

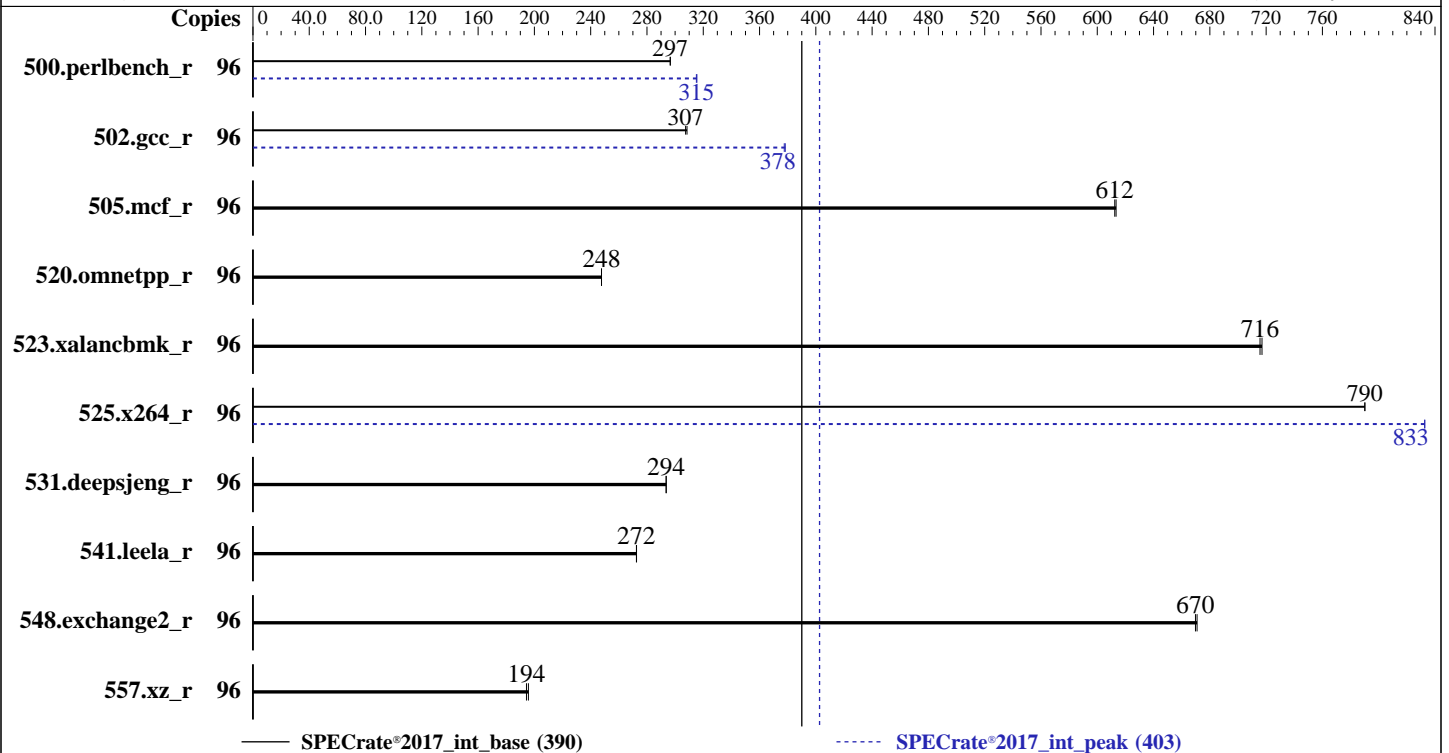

### Hardware

CPU Name: Intel Xeon Platinum 8461V  
 Max MHz: 3700  
 Nominal: 2200  
 Enabled: 48 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 97.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa)  
 4.18.0-372.9.1.el8.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 0.3.1 released Nov-2022  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	515	297	<b>515</b>	<b>297</b>			96	<b>485</b>	<b>315</b>	484	315		
502.gcc_r	96	441	308	<b>442</b>	<b>307</b>			96	359	378	<b>360</b>	<b>378</b>		
505.mcf_r	96	<b>253</b>	<b>612</b>	253	613			96	<b>253</b>	<b>612</b>	253	613		
520.omnetpp_r	96	<b>509</b>	<b>248</b>	508	248			96	<b>509</b>	<b>248</b>	508	248		
523.xalancbmk_r	96	141	717	<b>142</b>	<b>716</b>			96	141	717	<b>142</b>	<b>716</b>		
525.x264_r	96	<b>213</b>	<b>790</b>	213	790			96	202	833	<b>202</b>	<b>833</b>		
531.deepsjeng_r	96	<b>375</b>	<b>294</b>	375	294			96	<b>375</b>	<b>294</b>	375	294		
541.leela_r	96	583	273	<b>583</b>	<b>272</b>			96	583	273	<b>583</b>	<b>272</b>		
548.exchange2_r	96	<b>376</b>	<b>670</b>	375	671			96	<b>376</b>	<b>670</b>	375	671		
557.xz_r	96	<b>533</b>	<b>194</b>	530	196			96	<b>533</b>	<b>194</b>	530	196		

SPECrate®2017\_int\_base = **390**

SPECrate®2017\_int\_peak = **403**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
 memory using Red Hat Enterprise Linux 8.4  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
      Uncorrectable Memory Error : Disabled
      Virtualization Technology : Disabled
      Sub NUMA Cluster : 4-way Clustering
      DCU Streamer Prefetcher : Disabled
      LLC Prefetch : Disabled
      Dead Line LLC Alloc : Disabled
      Optimizer Mode : Enabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
      CLE : Disabled
      C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled
  
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on 1 Wed Jan 25 07:18:45 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: May-2022

## Platform Notes (Continued)

- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 239 (239-58.el8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
   Linux 1 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
   07:18:45 up 5 min,  1 user,  load average: 0.56, 0.56, 0.28
USER   TTY      FROM             LOGIN@   IDLE   JCPU   PCPU   WHAT
donald  :l        :l                07:16   ?xdm?  16.66s  0.00s  /usr/libexec/gdm-x-session
--register-session --run-script gnome-session
```

```
-----
3. Username
   From environment variable $USER:  root
   From the command 'logname':      donald
```

```
-----
4. ulimit -a
   core file size          (blocks, -c) 0
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size                (blocks, -f) unlimited
   pending signals         (-i) 2060667
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files               (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size               (kbytes, -s) unlimited
   cpu time                 (seconds, -t) unlimited
   max user processes      (-u) 2060667
   virtual memory          (kbytes, -v) unlimited
   file locks               (-x) unlimited
```

```
-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 17
   /usr/lib/systemd/systemd --user
   /usr/libexec/gnome-terminal-server
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

## Platform Notes (Continued)

```

bash
sudo su
su
bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=48 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=48 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode rate
  --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templots/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8461V
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000111
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores      : 48
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-47
physical id 0: apicids 0-95
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.32.1:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            96
On-line CPU(s) list: 0-95
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s):         1
NUMA node(s):     4
Vendor ID:         GenuineIntel
BIOS Vendor ID:   Intel
CPU family:        6
Model:             143
Model name:        Intel(R) Xeon(R) Platinum 8461V

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: May-2022

## Platform Notes (Continued)

```

BIOS Model name: Intel(R) Xeon(R) Platinum 8461V
Stepping: 8
CPU MHz: 2200.000
BogoMIPS: 4400.00
L1d cache: 48K
L1i cache: 32K
L2 cache: 2048K
L3 cache: 99840K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,48,50,52,54,56,58,60,62,64,66,68,70
NUMA node1 CPU(s): 24,26,28,30,32,34,36,38,40,42,44,46,72,74,76,78,80,82,84,86,88,90,92,94
NUMA node2 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,49,51,53,55,57,59,61,63,65,67,69,71
NUMA node3 CPU(s): 25,27,29,31,33,35,37,39,41,43,45,47,73,75,77,79,81,83,85,87,89,91,93,95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf
tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

```

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0,2,4,6,8,10,12,14,16,18,20,22,48,50,52,54,56,58,60,62,64,66,68,70
node 0 size: 128214 MB
node 0 free: 125567 MB
node 1 cpus: 24,26,28,30,32,34,36,38,40,42,44,46,72,74,76,78,80,82,84,86,88,90,92,94
node 1 size: 129018 MB
node 1 free: 127385 MB
node 2 cpus: 1,3,5,7,9,11,13,15,17,19,21,23,49,51,53,55,57,59,61,63,65,67,69,71
node 2 size: 129018 MB
node 2 free: 126935 MB
node 3 cpus: 25,27,29,31,33,35,37,39,41,43,45,47,73,75,77,79,81,83,85,87,89,91,93,95
node 3 size: 128974 MB
node 3 free: 125123 MB
node distances:
node  0  1  2  3
  0:  10  12  12  12
  1:  12  10  12  12
  2:  12  12  10  12
  3:  12  12  12  10

```

### 9. /proc/meminfo

MemTotal: 527591512 kB

### 10. who -r

run-level 5 Jan 25 07:15

### 11. Systemd service manager version: systemd 239 (239-58.el8)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: May-2022

## Platform Notes (Continued)

Default Target Status  
graphical running

### 12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
atd auditd avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm getty@
import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned libstoragemgmt
libvirtfd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd syslog timedatex tuned udisks2 vdo vgauthd vmtoolsd
disabled arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
debug-shell dnsmasq ebttables gssproxy hwloc-dump-hwdata initial-setup
initial-setup-reconfiguration iprdump iprinit iprupdate iscsid iscsiui kpatch kvm_stat ledmon
libvirt-guests man-db-restart-cache-update ndctl-monitor netcf-transaction nfs-blkmap nfs-convert
nfs-server nftables numad nvme-autoconnect oddjobd podman podman-auto-update podman-restart
psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ speech-dispatcherd
sshd-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcshd upower virtinterfaced
virtnetworkd virtnodevd virtnwfilterd virtproxyd virtqemud virtsecretfd virtstoraged
wpa_supplicant
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd
virtlogd
masked systemd-timedated

```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-372.9.1.el8.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=auto
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

### 14. cpupower frequency-info

```

analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

### 15. tuned-adm active

Current active profile: throughput-performance

### 16. sysctl

```

kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 0
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

## Platform Notes (Continued)

```

vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold              500
vm.min_unmapped_ratio            1
vm.nr_hugepages                   0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     10
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 8.6 (Ootpa)
redhat-release  Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release  Red Hat Enterprise Linux release 8.6 (Ootpa)

```

```

-----
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit      Not affected
lltf               Not affected
mds                Not affected
meltdown           Not affected
spec_store_bypass  Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1         Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2         Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds              Not affected
tsx_async_abort    Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

```

```

-----
21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 125G  3.7G 122G   3% /mnt/ramdisk

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge C6620
Product Family: PowerEdge

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: May-2022

## Platform Notes (Continued)

Serial: SL6C201

### 23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

8x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 0.3.1  
BIOS Date: 11/24/2022  
BIOS Revision: 0.3

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbnk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

## Compiler Version Notes (Continued)

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate®2017\_int\_peak = 403

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: May-2022

## Peak Optimization Flags (Continued)

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemallo
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallo
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate<sup>®</sup>2017\_int\_base = 390

PowerEdge C6620 (Intel Xeon Platinum 8461V)

SPECrate<sup>®</sup>2017\_int\_peak = 403

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** May-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.9 on 2023-01-25 07:18:44-0500.

Report generated on 2024-01-29 17:22:26 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-14.