



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017


Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

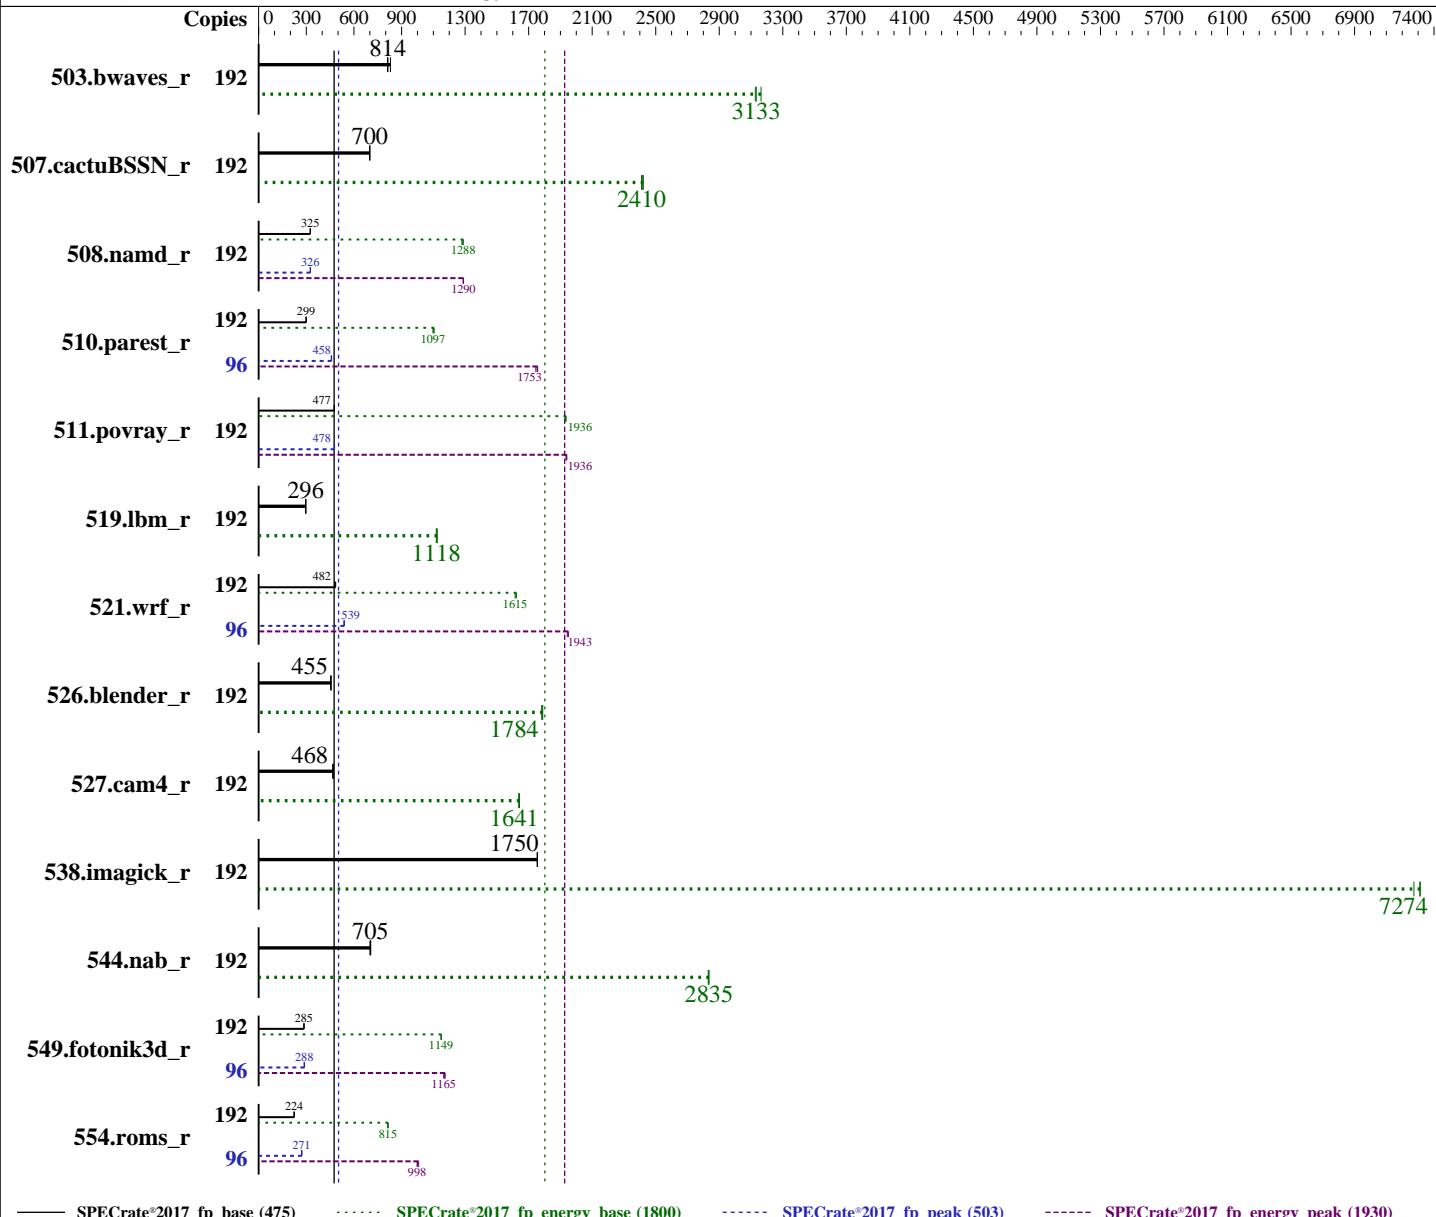

— SPECrate®2017_fp_base (475) SPECrate®2017_fp_energy_base (1800) ----- SPECrate®2017_fp_peak (503) ----- SPECrate®2017_fp_energy_peak (1930)

Hardware

CPU Name: AMD EPYC 9654
 Max MHz: 3700
 Nominal: 2400
 Enabled: 96 cores, 1 chip, 2 threads/core
 Orderable: 1 chip

(Continued on next page)

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version KAE105L 1.20 released Dec-2022
 (Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Hardware (Continued)

Cache L1: 32 KB I + 32 KB D on chip per core

L2: 1 MB I+D on chip per core

L3: 384 MB I+D on chip per chip,
32 MB shared / 8 cores

Other: None

Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)

Storage: 1 x 480 GB SATA SSD

Other: None

Software (Continued)

File System: xfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 64-bit

Other: None

Power Management: BIOS and OS set to balance power and performance

Power

Max. Power (W): 338.9

Idle Power (W): 86.91

Min. Temperature (C): 21.31

Elevation (m): 43

Line Standard: 220 V / 50 Hz / 1 phase / 3 wires

Provisioning: Line-powered

Power Settings

Management FW: Version 1.30 of KAX311A

Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 1800 W (non-redundant)

Details: 4P57A78359

Backplane: 8 x 2.5-inch HDD back plane

Other Storage: None

Storage Model #s: 4XB7A17107

NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb

NICs Enabled (FW/OS): 4 / 1

NICs Connected/Speed: 1 @ 1 Gb

Other HW Model #s: 6 x Performance fans

Power Analyzer

Power Analyzer: WIN:9888

Hardware Vendor: YOKOGAWA, Inc.

Model: YokogawaWT310E

Serial Number: C3UG05013E

Input Connection: Default

Metrology Institute: CNAS

Calibration By: GRG METROLOGY & TEST (BEIJING) CO., LTD.

Calibration Label: J202210116758A-0007

Calibration Date: 19-Oct-2022

PTDaemon® Version: 1.9.2 (3976349f; 2020-12-08)

Setup Description: Connected to PSU1

Current Ranges Used: 5A

Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889

Hardware Vendor: Digi International, Inc.

Model: DigiWATCHPORT_H

Serial Number: W63390099

Input Connection: USB

PTDaemon Version: 1.9.2 (3976349f; 2020-12-08)

Setup Description: 50 mm in front of SUT main intake

Base Results Table

| Benchmark | Copies | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power |
|--------------|--------|---------|-------|-------------|--------------|---------------|---------------|---------|-------|-------------|--------------|---------------|---------------|-------------|------------|-------------|--------------|---------------|---------------|
| 503.bwaves_r | 192 | 2321 | 830 | 663 | 3160 | 286 | 292 | 2373 | 811 | 671 | 3130 | 283 | 292 | 2365 | 814 | 670 | 3130 | 283 | 292 |

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Results Table (Continued)

| Benchmark | Copies | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power |
|------------------|--------|-------------|-------------|-------------|--------------|---------------|---------------|------------|------------|-------------|--------------|---------------|---------------|------------|------------|-------------|--------------|---------------|---------------|
| 507.cactusBSSN_r | 192 | 347 | 700 | 111 | 2410 | 319 | 323 | 347 | 700 | 110 | 2420 | 318 | 321 | 348 | 699 | 111 | 2420 | 318 | 322 |
| 508.namd_r | 192 | 561 | 325 | 155 | 1280 | 277 | 286 | 560 | 326 | 155 | 1290 | 276 | 285 | 561 | 325 | 154 | 1290 | 275 | 285 |
| 510.parest_r | 192 | 1680 | 299 | 498 | 1100 | 297 | 322 | 1685 | 298 | 496 | 1100 | 294 | 319 | 1673 | 300 | 495 | 1100 | 296 | 320 |
| 511.povray_r | 192 | 940 | 477 | 252 | 1930 | 268 | 271 | 943 | 476 | 252 | 1930 | 267 | 270 | 941 | 477 | 251 | 1940 | 267 | 270 |
| 519.lbm_r | 192 | 683 | 296 | 206 | 1120 | 301 | 307 | 681 | 297 | 205 | 1120 | 300 | 306 | 683 | 296 | 205 | 1120 | 300 | 307 |
| 521.wrf_r | 192 | 887 | 485 | 290 | 1620 | 327 | 339 | 896 | 480 | 289 | 1620 | 323 | 335 | 893 | 482 | 291 | 1610 | 326 | 336 |
| 526.blender_r | 192 | 643 | 455 | 177 | 1780 | 276 | 308 | 643 | 454 | 178 | 1780 | 276 | 305 | 641 | 456 | 177 | 1790 | 276 | 304 |
| 527.cam4_r | 192 | 718 | 468 | 223 | 1640 | 310 | 339 | 719 | 467 | 223 | 1640 | 311 | 338 | 716 | 469 | 223 | 1640 | 311 | 338 |
| 538.imagick_r | 192 | 272 | 1750 | 71.1 | 7270 | 261 | 302 | 272 | 1760 | 70.7 | 7310 | 260 | 304 | 272 | 1750 | 70.7 | 7310 | 260 | 301 |
| 544.nab_r | 192 | 458 | 705 | 124 | 2830 | 270 | 288 | 459 | 705 | 124 | 2840 | 269 | 287 | 461 | 701 | 124 | 2830 | 268 | 286 |
| 549.fotonik3d_r | 192 | 2625 | 285 | 725 | 1150 | 276 | 282 | 2616 | 286 | 725 | 1150 | 277 | 282 | 2626 | 285 | 725 | 1150 | 276 | 282 |
| 554.roms_r | 192 | 1364 | 224 | 413 | 815 | 303 | 317 | 1366 | 223 | 414 | 813 | 303 | 315 | 1361 | 224 | 413 | 815 | 303 | 315 |

SPECrate®2017_fp_base = 475

SPECrate®2017_fp_energy_base = 1800

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Results Table

| Benchmark | Copies | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power | Seconds | Ratio | Energy (kJ) | Energy Ratio | Average Power | Maximum Power |
|------------------|--------|------------|-------------|-------------|--------------|---------------|---------------|-------------|------------|-------------|--------------|---------------|---------------|-------------|------------|-------------|--------------|---------------|---------------|
| 503.bwaves_r | 192 | 2321 | 830 | 663 | 3160 | 286 | 292 | 2373 | 811 | 671 | 3130 | 283 | 292 | 2365 | 814 | 670 | 3130 | 283 | 292 |
| 507.cactusBSSN_r | 192 | 347 | 700 | 111 | 2410 | 319 | 323 | 347 | 700 | 110 | 2420 | 318 | 321 | 348 | 699 | 111 | 2420 | 318 | 322 |
| 508.namd_r | 192 | 560 | 326 | 154 | 1290 | 276 | 301 | 560 | 326 | 154 | 1290 | 275 | 284 | 559 | 326 | 154 | 1290 | 276 | 286 |
| 510.parest_r | 96 | 549 | 458 | 157 | 1750 | 285 | 319 | 548 | 458 | 156 | 1750 | 284 | 318 | 546 | 460 | 155 | 1760 | 285 | 318 |
| 511.povray_r | 192 | 941 | 476 | 251 | 1940 | 267 | 271 | 938 | 478 | 251 | 1940 | 268 | 271 | 938 | 478 | 251 | 1940 | 267 | 270 |
| 519.lbm_r | 192 | 683 | 296 | 206 | 1120 | 301 | 307 | 681 | 297 | 205 | 1120 | 300 | 306 | 683 | 296 | 205 | 1120 | 300 | 307 |
| 521.wrf_r | 96 | 400 | 538 | 120 | 1950 | 301 | 307 | 399 | 539 | 120 | 1950 | 302 | 309 | 399 | 539 | 121 | 1940 | 303 | 309 |
| 526.blender_r | 192 | 643 | 455 | 177 | 1780 | 276 | 308 | 643 | 454 | 178 | 1780 | 276 | 305 | 641 | 456 | 177 | 1790 | 276 | 304 |
| 527.cam4_r | 192 | 718 | 468 | 223 | 1640 | 310 | 339 | 719 | 467 | 223 | 1640 | 311 | 338 | 716 | 469 | 223 | 1640 | 311 | 338 |
| 538.imagick_r | 192 | 272 | 1750 | 71.1 | 7270 | 261 | 302 | 272 | 1760 | 70.7 | 7310 | 260 | 304 | 272 | 1750 | 70.7 | 7310 | 260 | 301 |
| 544.nab_r | 192 | 458 | 705 | 124 | 2830 | 270 | 288 | 459 | 705 | 124 | 2840 | 269 | 287 | 461 | 701 | 124 | 2830 | 268 | 286 |
| 549.fotonik3d_r | 96 | 1299 | 288 | 355 | 1170 | 273 | 277 | 1299 | 288 | 358 | 1170 | 275 | 279 | 1302 | 287 | 356 | 1170 | 274 | 278 |
| 554.roms_r | 96 | 565 | 270 | 168 | 1000 | 298 | 305 | 559 | 273 | 167 | 1010 | 299 | 304 | 564 | 271 | 169 | 998 | 299 | 305 |

SPECrate®2017_fp_peak = 503

SPECrate®2017_fp_energy_peak = 1930

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =
 "/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_rate_aocc400_genoa_B_lib/
 lib:/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_rate_aocc400_genoa_B_l
 ib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes

BIOS configuration:

Operating Mode set to Custom Mode
Core Performance Boost set to Disabled
NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost.localdomain Tue Jan 24 10:20:51 2023
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9654 96-Core Processor
  1 "physical id"s (chips)
  192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 96
  siblings   : 192
  physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
  26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
  54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
  82 83 84 85 86 87 88 89 90 91 92 93 94 95
```

From lscpu from util-linux 2.37.4:

| | |
|----------------------|-----------------------------------|
| Architecture: | x86_64 |
| CPU op-mode(s): | 32-bit, 64-bit |
| Address sizes: | 52 bits physical, 57 bits virtual |
| Byte Order: | Little Endian |
| CPU(s): | 192 |
| On-line CPU(s) list: | 0-191 |
| Vendor ID: | AuthenticAMD |
| BIOS Vendor ID: | Advanced Micro Devices, Inc. |
| Model name: | AMD EPYC 9654 96-Core Processor |
| BIOS Model name: | AMD EPYC 9654 96-Core Processor |
| CPU family: | 25 |
| Model: | 17 |
| Thread(s) per core: | 2 |
| Core(s) per socket: | 96 |
| Socket(s): | 1 |
| Stepping: | 1 |
| Frequency boost: | disabled |
| CPU max MHz: | 3707.8120 |

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

| | |
|----------------------------------|---|
| CPU min MHz: | 1500.0000 |
| BogoMIPS: | 4793.04 |
| Flags: | fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cq_m_llc cq_m_occup_llc cq_m_mbm_total cq_m_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld |
| Virtualization: | AMD-V |
| L1d cache: | 3 MiB (96 instances) |
| L1i cache: | 3 MiB (96 instances) |
| L2 cache: | 96 MiB (96 instances) |
| L3 cache: | 384 MiB (12 instances) |
| NUMA node(s): | 4 |
| NUMA node0 CPU(s): | 0-23,96-119 |
| NUMA node1 CPU(s): | 24-47,120-143 |
| NUMA node2 CPU(s): | 48-71,144-167 |
| NUMA node3 CPU(s): | 72-95,168-191 |
| Vulnerability Itlb multihit: | Not affected |
| Vulnerability L1tf: | Not affected |
| Vulnerability Mds: | Not affected |
| Vulnerability Meltdown: | Not affected |
| Vulnerability Spec store bypass: | Mitigation; Speculative Store Bypass disabled via prctl |
| Vulnerability Spectre v1: | Mitigation; usercopy/swapgs barriers and __user pointer sanitization |
| Vulnerability Spectre v2: | Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling |
| Vulnerability Srbds: | Not affected |
| Vulnerability Tsx async abort: | Not affected |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|------|----------|----------------|
| L1d | 32K | 3M | 8 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 3M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 96M | 8 | Unified | 2 | 2048 | 1 | 64 |

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

L3 32M 384M 16 Unified 3 32768 1 64

/proc/cpuinfo cache data
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 96 97 98 99
100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119

node 0 size: 96558 MB

node 0 free: 95270 MB

node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141
142 143

node 1 size: 96741 MB

node 1 free: 95675 MB

node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165
166 167

node 2 size: 96741 MB

node 2 free: 95591 MB

node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189
190 191

node 3 size: 96636 MB

node 3 free: 95482 MB

node distances:

node 0 1 2 3

0: 10 12 12 12

1: 12 10 12 12

2: 12 12 10 12

3: 12 12 12 10

From /proc/meminfo

MemTotal: 395957248 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
powersave

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```
VERSION="9.0 (Plow)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="9.0"
PLATFORM_ID="platform:el9"
PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos
```

uname -a:

```
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2
10:02:12 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

| | |
|--|---|
| CVE-2018-12207 (iTLB Multihit): | Not affected |
| CVE-2018-3620 (L1 Terminal Fault): | Not affected |
| Microarchitectural Data Sampling: | Not affected |
| CVE-2017-5754 (Meltdown): | Not affected |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl |
| CVE-2017-5753 (Spectre variant 1): | Mitigation: usercopy/swaps barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2): | Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | Not affected |
| CVE-2019-11135 (TSX Asynchronous Abort): | Not affected |

run-level 3 Jan 23 09:59

```
SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   372G   18G  354G   5%  /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR655V3
Product Family:  ThinkSystem
Serial:          1234567890
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x SK Hynix HMCG88AEBRA115N 32 GB 2 rank 4800
6x SK Hynix HMCG88AEBRA168N 32 GB 2 rank 4800

BIOS:

BIOS Vendor: Lenovo
BIOS Version: KAE105L-1.20
BIOS Date: 12/29/2022
BIOS Revision: 1.20
Firmware Revision: 1.30

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C           | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
           | 544.nab_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++          | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++, C       | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR655 V3 2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

===== C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

===== Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

===== Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Compiler Version Notes (Continued)

```
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
    LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Portability Flags (Continued)

526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lslr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lslr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdaloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology
ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654**

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang

554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang

Benchmarks using both Fortran and C:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654

SPECrate®2017_fp_base = 475
SPECrate®2017_fp_energy_base = 1800
SPECrate®2017_fp_peak = 503
SPECrate®2017_fp_energy_peak = 1930

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.html>
<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.xml>
<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-23 21:20:49-0500.

Report generated on 2023-03-03 16:50:35 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-23.