



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro


A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

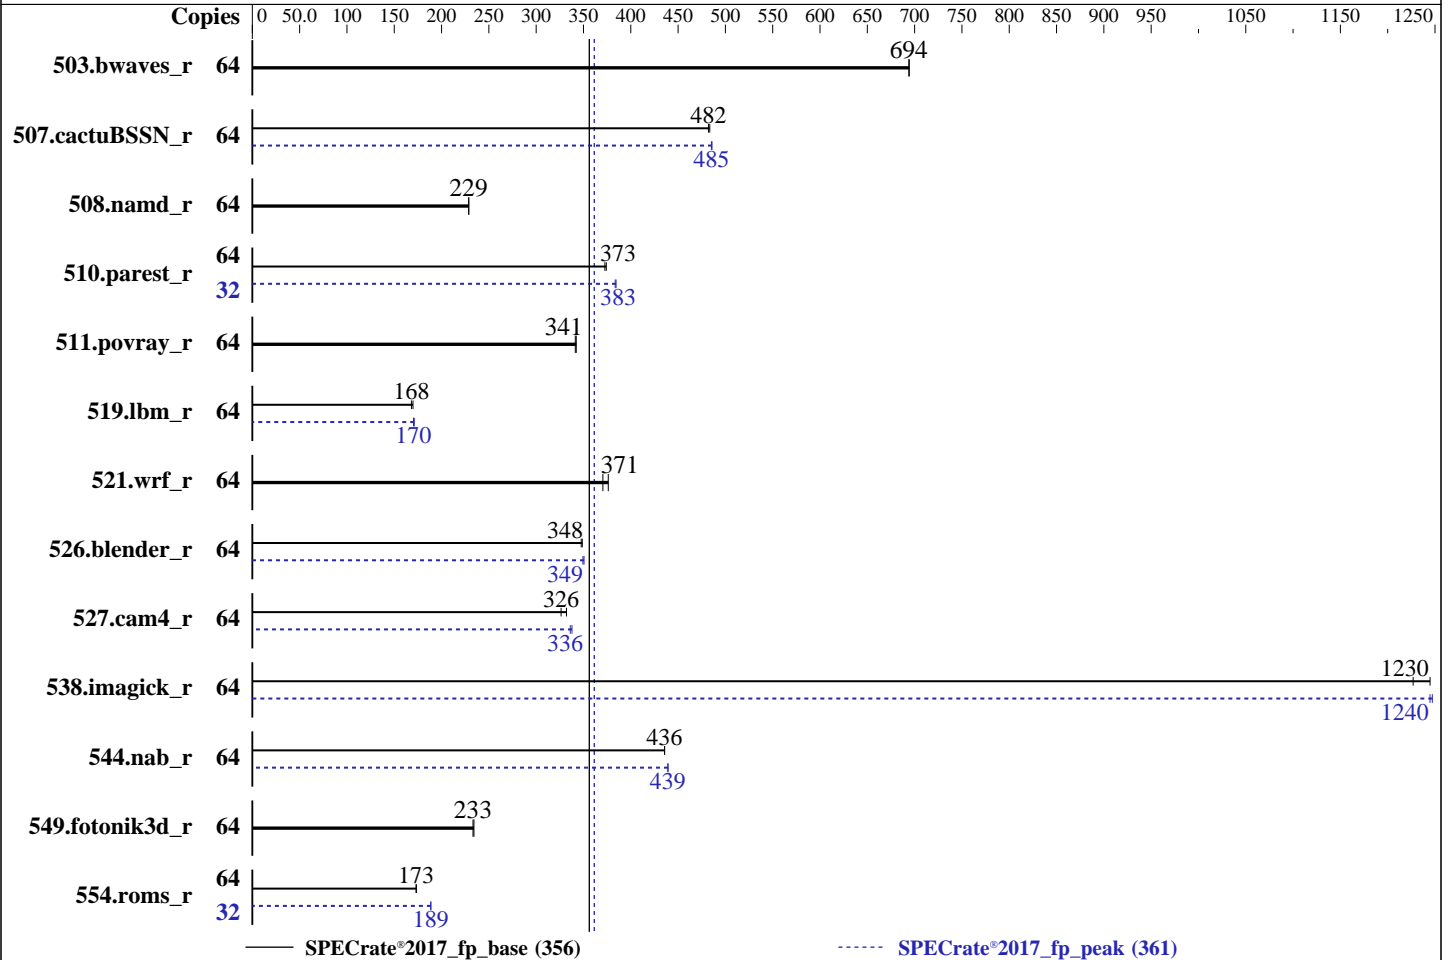

Hardware

CPU Name: AMD EPYC 7313
Max MHz: 3700
Nominal: 3000
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 4 cores
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: Ubuntu 22.04.1 LTS
Kernel 5.15.0-58-generic
Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
Parallel: No
Firmware: Version 2.5 released Sep-2022
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc: jemalloc memory allocator library v5.1.0
Power Management: BIOS and OS set to max performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	925	694	924	694			64	925	694	924	694		
507.cactuBSSN_r	64	168	483	168	482			64	167	485	167	486		
508.namd_r	64	266	229	266	229			64	266	229	266	229		
510.parest_r	64	449	373	448	374			32	218	384	218	383		
511.povray_r	64	438	341	437	342			64	438	341	437	342		
519.lbm_r	64	401	168	397	170			64	394	171	396	170		
521.wrf_r	64	381	376	387	371			64	381	376	387	371		
526.blender_r	64	280	348	280	349			64	278	351	279	349		
527.cam4_r	64	337	332	343	326			64	333	336	331	338		
538.imagick_r	64	128	1240	130	1230			64	128	1240	128	1250		
544.nab_r	64	247	436	247	436			64	245	439	245	439		
549.fotonik3d_r	64	1069	233	1065	234			64	1069	233	1065	234		
554.roms_r	64	586	173	588	173			32	270	189	269	189		

SPECrate®2017_fp_base = **356**

SPECrate®2017_fp_peak = **361**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc300_milan_B_lib/lib;/home/cpu2017/amd_rate_aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 180
Package Power Limit Control = Manual
Package Power Limit = 180
APBDIS = 1
NUMA Nodes Per Socket = NPS4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Platform Notes (Continued)

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on h12dsu-7513 Thu Jan 19 12:55:40 2023

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7313 16-Core Processor
2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 48 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: AuthenticAMD
Model name: AMD EPYC 7313 16-Core Processor
CPU family: 25
Model: 1
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 3729.4919
CPU min MHz: 1500.0000
BogoMIPS: 6000.17
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Platform Notes (Continued)

smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes
vpcmulqdg rdpid overflow_recov succor smca fsrm

Virtualization: AMD-V
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 16 MiB (32 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRBS-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	512K	16M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Platform Notes (Continued)

```

node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 128822 MB
node 0 free: 128306 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 129021 MB
node 1 free: 128371 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 129021 MB
node 2 free: 128480 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 129009 MB
node 3 free: 128506 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 129021 MB
node 4 free: 128475 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 128985 MB
node 5 free: 128426 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 129021 MB
node 6 free: 128480 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 129018 MB
node 7 free: 128483 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

```

From /proc/meminfo
MemTotal:      1056687440 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: balanced

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

/usr/bin/lsb_release -d

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Platform Notes (Continued)

Ubuntu 22.04.1 LTS

```
From /etc/*release* /etc/*version*
debian_version: bookworm/sid
os-release:
  PRETTY_NAME="Ubuntu 22.04.1 LTS"
  NAME="Ubuntu"
  VERSION_ID="22.04"
  VERSION="22.04.1 LTS (Jammy Jellyfish)"
  VERSION_CODENAME=jammy
  ID=ubuntu
  ID_LIKE=debian
  HOME_URL="https://www.ubuntu.com/"
```

```
uname -a:
Linux h12dsu-7513 5.15.0-58-generic #64-Ubuntu SMP Thu Jan 5 11:43:13 UTC 2023 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling, PBRSE-eIBRS: Not affected
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Jan 18 07:04

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  182G   37G  136G  21% /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Platform Notes (Continued)

Product: Super Server
Serial: 0123456789

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x NO DIMM Unknown
16x SK Hynix HMAA8GR7AJR4N-XN 64 GB 2 rank 3200

BIOS:
BIOS Vendor: American Megatrends Inc.
BIOS Version: 2.5
BIOS Date: 09/14/2022
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
544.nab_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Compiler Version Notes (Continued)

```

LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
-----

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

```

```

=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
-----

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Base Portability Flags (Continued)

549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false  
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop  
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using both C and C++:

```
clang++ clang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Peak Optimization Flags (Continued)

510.parest_r (continued):

```
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Peak Optimization Flags (Continued)

511.povray_r: basepeak = yes

```
526.blender_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7313)

SPECrate®2017_fp_base = 356

SPECrate®2017_fp_peak = 361

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2023
Hardware Availability: Aug-2019
Software Availability: Jan-2023

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-19 07:55:40-0500.

Report generated on 2023-02-15 10:41:01 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.