



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

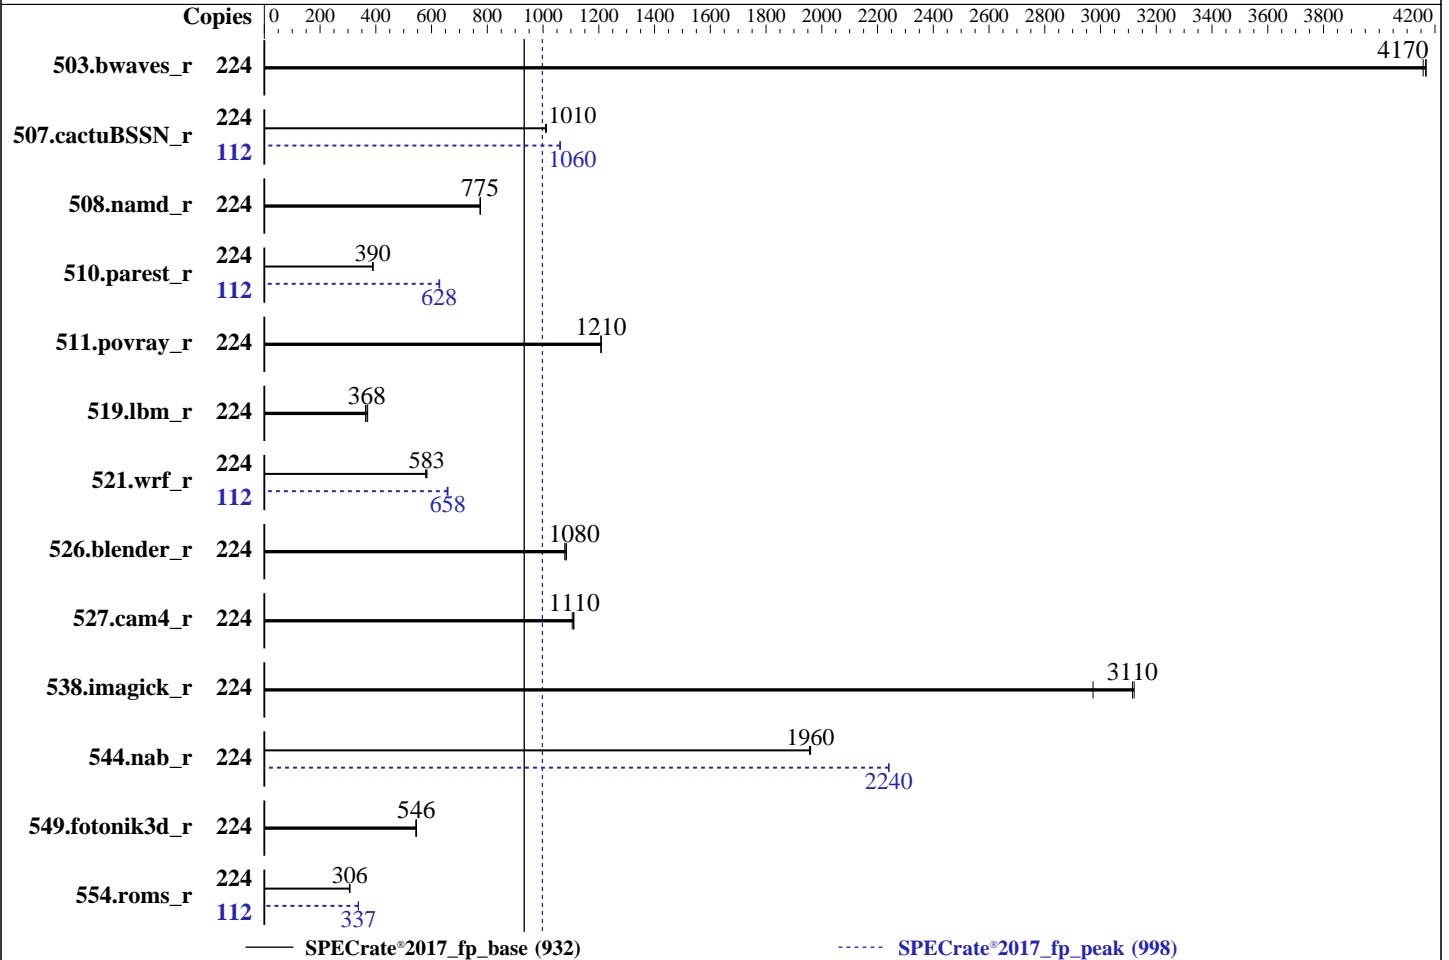

Hardware

CPU Name: Intel Xeon Platinum 8480+
 Max MHz: 3800
 Nominal: 2000
 Enabled: 112 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 2.9 TB NVMe SSD
 Other: None

Software

OS: Ubuntu 22.04.2 LTS
 Kernel 5.15.0-60-generic
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.22 01/18/2023 released Jan-2023
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Feb-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	540	4160	539	4170	539	4170	224	540	4160	539	4170	539	4170
507.cactuBSSN_r	224	281	1010	281	1010	280	1010	112	134	1060	134	1060	133	1060
508.namd_r	224	275	774	274	775	275	775	224	275	774	274	775	275	775
510.parest_r	224	1504	390	1508	388	1502	390	112	467	628	466	629	467	627
511.povray_r	224	433	1210	433	1210	433	1210	224	433	1210	433	1210	433	1210
519.lbm_r	224	650	363	641	368	637	371	224	650	363	641	368	637	371
521.wrf_r	224	867	579	861	583	861	583	112	383	656	381	658	381	659
526.blender_r	224	315	1080	316	1080	315	1080	224	315	1080	316	1080	315	1080
527.cam4_r	224	353	1110	353	1110	355	1100	224	353	1110	353	1110	355	1100
538.imagick_r	224	179	3110	179	3120	187	2970	224	179	3110	179	3120	187	2970
544.nab_r	224	192	1960	193	1960	192	1960	224	168	2240	168	2240	168	2240
549.fotonik3d_r	224	1606	544	1600	546	1600	546	224	1606	544	1600	546	1600	546
554.roms_r	224	1166	305	1162	306	1159	307	112	527	338	528	337	528	337

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Platinum 8480+ processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute

Thermal Configuration set to Maximum Cooling

Enhanced Processor Performance Profile set to Aggressive

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on admin1 Sat Feb 25 20:36:57 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. `uname -a`

```
Linux admin1 5.15.0-60-generic #66-Ubuntu SMP Fri Jan 20 14:29:49 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

2. `w`

```
20:36:57 up 7 min,  2 users,  load average: 1.00, 0.80, 0.41
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
admin1    tty1    -                20:33   3:02   0.12s  0.01s -bash
admin1    pts/0   -                20:34   6.00s  0.89s  0.06s sudo -i
```

3. Username

```
From environment variable $USER:  root
From the command 'logname':      admin1
```

4. `ulimit -a`

```
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 132070696
process            4126765
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
sudo -i
sudo -i
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.013/templogs/preenv.fprate.013.0.log --lognum 013.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8480+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 56
siblings       : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids 0-111
physical id 1: apicids 128-239

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Feb-2023

Platform Notes (Continued)

```

CPU(s):                224
On-line CPU(s) list:   0-223
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8480+
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    56
Socket(s):              2
Stepping:               6
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                        arch_capabilities
Virtualization:         VT-x
L1d cache:              5.3 MiB (112 instances)
L1i cache:              3.5 MiB (112 instances)
L2 cache:               224 MiB (112 instances)
L3 cache:               210 MiB (2 instances)
NUMA node(s):           8
NUMA node0 CPU(s):     0-13,112-125
NUMA node1 CPU(s):     14-27,126-139
NUMA node2 CPU(s):     28-41,140-153
NUMA node3 CPU(s):     42-55,154-167
NUMA node4 CPU(s):     56-69,168-181
NUMA node5 CPU(s):     70-83,182-195
NUMA node6 CPU(s):     84-97,196-209
NUMA node7 CPU(s):     98-111,210-223
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-13,112-125
node 0 size: 128728 MB
node 0 free: 127846 MB
node 1 cpus: 14-27,126-139
node 1 size: 129017 MB
node 1 free: 128633 MB
node 2 cpus: 28-41,140-153
node 2 size: 129017 MB
node 2 free: 128533 MB
node 3 cpus: 42-55,154-167
node 3 size: 129017 MB
node 3 free: 128408 MB
node 4 cpus: 56-69,168-181
node 4 size: 129017 MB
node 4 free: 128653 MB
node 5 cpus: 70-83,182-195
node 5 size: 129017 MB
node 5 free: 128632 MB
node 6 cpus: 84-97,196-209
node 6 size: 129017 MB
node 6 free: 128625 MB
node 7 cpus: 98-111,210-223
node 7 size: 128970 MB
node 7 free: 128311 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  20  30  30  30  30  30  30

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Feb-2023

Platform Notes (Continued)

```

1:  20  10  30  30  30  30  30  30  30
2:  30  30  10  20  30  30  30  30  30
3:  30  30  20  10  30  30  30  30  30
4:  30  30  30  30  10  20  30  30  30
5:  30  30  30  30  20  10  30  30  30
6:  30  30  30  30  30  30  30  10  20
7:  30  30  30  30  30  30  30  20  10

```

```

-----
9. /proc/meminfo
   MemTotal:      1056565568 kB

```

```

-----
10. who -r
     run-level 5 Feb 25 20:32

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
     Default Target   Status
     graphical        degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
     UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* ipmiutil_wdt.service                  loaded failed failed ipmiutil Watchdog Timer Service using cron
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

```

```

-----
13. Services, from systemctl list-unit-files
     STATE    UNIT FILES
enabled     ModemManager anacron apparmor blk-availability cloud-config cloud-final cloud-init
             cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
             grub-common grub-initrd-fallback ipmiutil_wdt irqbalance keyboard-setup lvm2-monitor
             lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rpcbind
             rsyslog secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online
             systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds
             ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled    console-getty debug-shell ipmi_port ipmievd ipmiutil_asy ipmiutil_evt iscsid nftables
             powertop rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator
             systemd-sysexit systemd-time-wait-sync upower
generated   apport openipmi
indirect     uuidd
masked      cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
             x11-common

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/vmlinuz-5.15.0-60-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
```

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

19. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.2 LTS

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	2.9T	163G	2.6T	6%	/

21. /sys/devices/virtual/dmi/id

Vendor: HPE
 Product: ProLiant DL380a Gen11
 Product Family: ProLiant
 Serial: CNX22602NL

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
8x UNKNOWN NOT AVAILABLE

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
 BIOS Version: 1.22
 BIOS Date: 01/18/2023
 BIOS Revision: 1.22
 Firmware Revision: 1.20

Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Compiler Version Notes (Continued)

Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Compiler Version Notes (Continued)

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Base Portability Flags (Continued)

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Feb-2023

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 932

SPECrate®2017_fp_peak = 998

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-25 15:36:57-0500.

Report generated on 2023-03-15 10:21:27 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-14.