



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

**SPECSpeed®2017\_fp\_base = 264**

**SPECSpeed®2017\_fp\_peak = 278**

CPU2017 License: 9016


Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

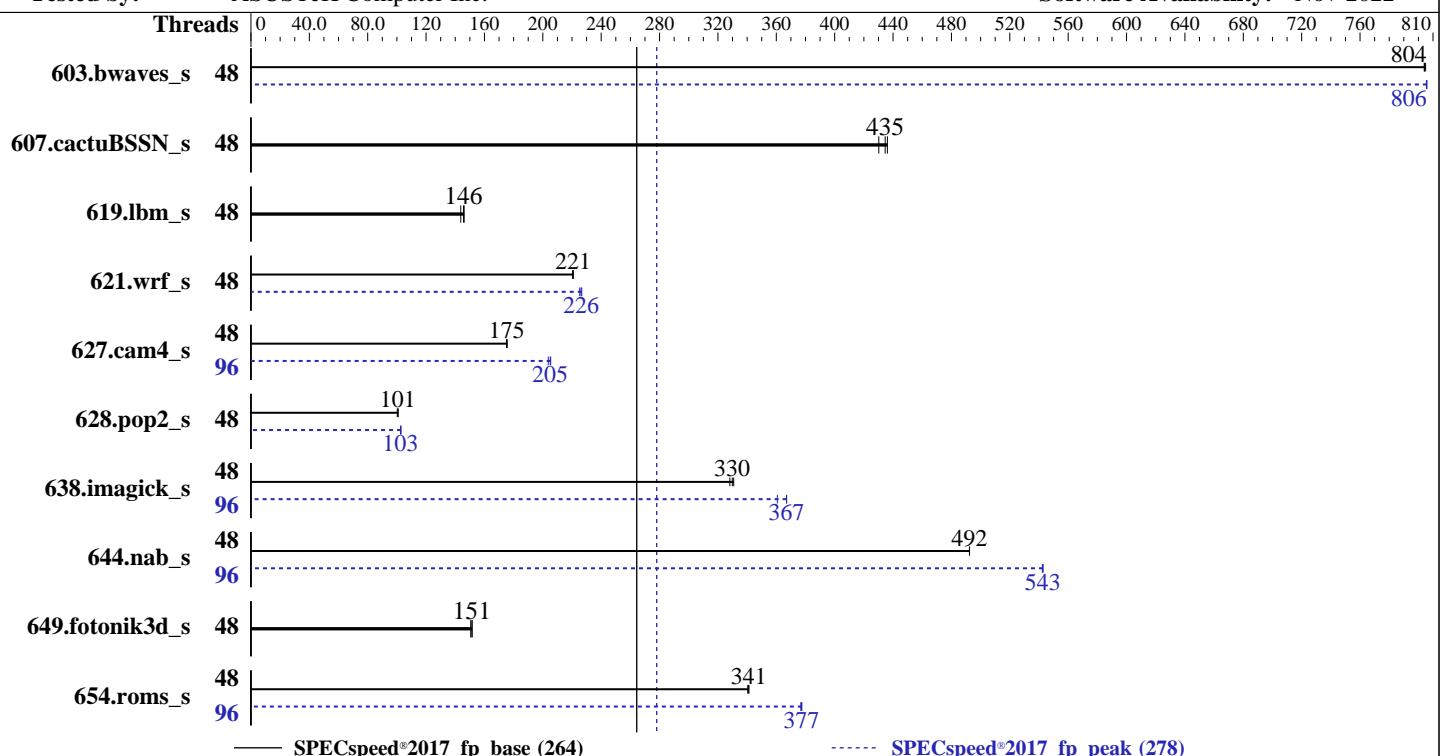

— SPECSpeed®2017\_fp\_base (264)

----- SPECSpeed®2017\_fp\_peak (278)

### Hardware

CPU Name: AMD EPYC 9454P  
Max MHz: 3800  
Nominal: 2750  
Enabled: 48 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip,  
32 MB shared / 6 cores  
Other: None  
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 1.6 TB PCIE NVME SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
Kernel 5.14.21-150400.22-default  
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
Parallel: Yes  
Firmware: Version 0602 released Dec-2022  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance  
at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

**SPECspeed®2017\_fp\_base = 264**

**SPECspeed®2017\_fp\_peak = 278**

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	
603.bwaves_s	48	73.3	805	<b>73.4</b>	<b>804</b>	73.4	804	48	73.2	806	73.2	805	<b>73.2</b>	<b>806</b>		
607.cactubSSN_s	48	38.2	436	38.7	430	<b>38.4</b>	<b>435</b>	48	38.2	436	38.7	430	<b>38.4</b>	<b>435</b>		
619.lbm_s	48	35.9	146	<b>36.0</b>	<b>146</b>	36.4	144	48	35.9	146	<b>36.0</b>	<b>146</b>	36.4	144		
621.wrf_s	48	60.0	221	59.9	221	<b>59.9</b>	<b>221</b>	48	<b>58.5</b>	<b>226</b>	58.7	225	58.3	227		
627.cam4_s	48	<b>50.5</b>	<b>175</b>	50.6	175	50.5	176	96	<b>43.2</b>	205	43.5	204	<b>43.2</b>	<b>205</b>		
628.pop2_s	48	118	100	118	101	<b>118</b>	<b>101</b>	48	<b>115</b>	103	116	102	<b>116</b>	<b>103</b>		
638.imagick_s	48	<b>43.7</b>	<b>330</b>	43.6	331	44.0	328	96	40.0	361	39.3	367	<b>39.3</b>	<b>367</b>		
644.nab_s	48	<b>35.5</b>	<b>492</b>	35.5	492	35.5	492	96	<b>32.2</b>	<b>543</b>	32.2	543	32.2	542		
649.fotonik3d_s	48	60.5	151	60.2	151	<b>60.2</b>	<b>151</b>	48	60.5	151	60.2	151	<b>60.2</b>	<b>151</b>		
654.roms_s	48	<b>46.2</b>	<b>341</b>	46.3	340	46.1	341	96	41.8	377	41.7	378	<b>41.7</b>	<b>377</b>		

**SPECspeed®2017\_fp\_base = 264**

**SPECspeed®2017\_fp\_peak = 278**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
OS set to performance mode via cpupower frequency-set -g performance  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECspeed®2017\_fp\_base = 264

SPECspeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves\_s, 607.cactubSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

To disable THP for peak runs of 621.wrf\_s:

'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

To enable THP only on request for peak runs of 654.roms\_s:

'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-95"  
LD\_LIBRARY\_PATH = "/cpu119/amd\_speed\_aocc400\_genoa\_B/lib/lib:  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "96"

Environment variables set by runcpu during the 603.bwaves\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"

Environment variables set by runcpu during the 627.cam4\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-95"

Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-47"

Environment variables set by runcpu during the 638.imagick\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-95"

Environment variables set by runcpu during the 644.nab\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-95"

Environment variables set by runcpu during the 654.roms\_s peak run:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

**SPECspeed®2017\_fp\_base = 264**

**SPECspeed®2017\_fp\_peak = 278**

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Environment Variables Notes (Continued)

```
GOMP_CPU_AFFINITY = "0 48 1 49 2 50 3 51 4 52 5 53 6 54 7 55 8 56 9 57 10 58
 11 59 12 60 13 61 14 62 15 63 16 64 17 65 18 66 19 67 20 68 21 69 22 70
 23 71 24 72 25 73 26 74 27 75 28 76 29 77 30 78 31 79 32 80 33 81 34 82
 35 83 36 84 37 85 38 86 39 87 40 88 41 89 42 90 43 91 44 92 45 93 46 94
 47 95"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

SR-IOV Support = Disabled

SVM Mode = Disabled

NUMA nodes per socket = NPS1

Determinism Control = Manual

Determinism Enable = Power

Engine Boost = Aggressive

TDP Control = Manual

TDP = 400

PPT Control = Manual

PPT = 400

IOMMU = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /cpull9/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Mar 8 21:01:55 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECspeed®2017\_fp\_base = 264

SPECspeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----
-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
21:01:55 up 5:02, 1 user, load average: 22.06, 49.75, 54.92
USER      TTY      FROM          LOGIN@    IDLE      JCPU      PCPU WHAT
root      tty1     -           15:59    4:00m  1.21s  0.08s /bin/bash ./amd_speed_aocc400_genoa_B1.sh
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 3093452
max locked memory        (kbytes, -l) 2097152
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECSpeed®2017\_fp\_base = 264

SPECSpeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

max memory size	(kbytes, -m) unlimited
open files	(-n) 1024000
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 3093452
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./speed.sh  
python3 ./run\_amd\_speed\_aocc400\_genoa\_B1.py  
/bin/bash ./amd\_speed\_aocc400\_genoa\_B1.sh  
runcpu --config amd\_speed\_aocc400\_genoa\_B1.cfg --tune all --reportable --iterations 3 fpspeed  
runcpu --configfile amd\_speed\_aocc400\_genoa\_B1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.161/templogs/preenv.fpspeed.161.0.log --lognum 161.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /cpu119

-----  
6. /proc/cpuinfo  
model name : AMD EPYC 9454P 48-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 25  
model : 17  
stepping : 1  
microcode : 0xa101111  
bugs : sysret\_ss\_attrs spectre\_v1 spectre\_v2 spec\_store\_bypass  
TLB size : 3584 4K pages  
cpu cores : 48  
siblings : 96  
1 physical ids (chips)  
96 processors (hardware threads)  
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61  
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECSpeed®2017\_fp\_base = 264

SPECSpeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	96
On-line CPU(s) list:	0-95
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9454P 48-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	2
Core(s) per socket:	48
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3810.7910
CPU min MHz:	1500.0000
BogoMIPS:	5491.62
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl_pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnnowprefetch osvw ibs skininit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqmm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total cqmm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_ll1d
Virtualization:	AMD-V
L1d cache:	1.5 MiB (48 instances)
L1i cache:	1.5 MiB (48 instances)
L2 cache:	48 MiB (48 instances)
L3 cache:	256 MiB (8 instances)
NUMA node(s):	1
NUMA node0 CPU(s):	0-95
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

**SPECSpeed®2017\_fp\_base = 264**

**SPECSpeed®2017\_fp\_peak = 278**

**CPU2017 License:** 9016

**Test Date:** Mar-2023

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Dec-2022

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Nov-2022

## Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-95

node 0 size: 773387 MB

node 0 free: 771702 MB

node distances:

node 0

0: 10

-----  
9. /proc/meminfo

MemTotal: 791949036 kB

-----  
10. who -r

run-level 3 Mar 8 15:59

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status

multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECspeed®2017\_fp\_base = 264

SPECspeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load
lunmask man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rdisc rpcbind
rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd tuned udisks2
indirect wickedd
```

---

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803
splash=silent
mitigations=auto
quiet
cgroup_disable=memory,cpu,cpuacct,blkio,hugetlb,pids,cpuset,perf_event,freezer,devices,net_cls,net_prio
```

---

14. cpupower frequency-info

```
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.75 GHz.
    The governor "performance" may decide which speed to use
    within this range.

boost state support:
    Supported: yes
    Active: yes
```

---

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance
```

---

16. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECspeed®2017\_fp\_base = 264

SPECspeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          1
```

---

```
17. /sys/kernel/mm/transparent_hugepage
    defrag           [always] defer defer+madvise madvise never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
```

---

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000
```

---

```
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4
```

---

```
20. Disk information
SPEC is set to: /cpull9
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p8  xfs   500G  102G  399G  21%  /
```

---

```
21. /sys/devices/virtual/dmi/id
  Vendor:          ASUSTeK COMPUTER INC.
  Product:         RS520A-E12-RS12U
  Product Family: Server
  Serial:          123456789012
```

---

```
22. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECspeed®2017\_fp\_base = 264

SPECspeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

"DMTF SMBIOS" standard.

Memory:

12x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.

BIOS Version: 0602

BIOS Date: 12/20/2022

BIOS Revision: 6.2

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

C++, C, Fortran | 607.cactusBSSN\_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECSpeed®2017\_fp\_base = 264

SPECSpeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

=====

Fortran	603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
	654.roms_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

Fortran, C	621.wrf_s(base, peak) 627.cam4_s(base, peak)
	628.pop2_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECspeed®2017\_fp\_base = 264

SPECspeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactubSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Benchmarks using Fortran, C, and C++:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

**SPECspeed®2017\_fp\_base = 264**

**SPECspeed®2017\_fp\_peak = 278**

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECSpeed®2017\_fp\_base = 264

SPECSpeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang

644.nab\_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flft -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3  
-fvector-transform -fscalar-transform -fopenmp=libomp  
-lomp -lamdlibm -lamdaloc -lflang

649.fotonik3d\_s: basepeak = yes

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

621.wrf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

SPECSpeed®2017\_fp\_base = 264

SPECSpeed®2017\_fp\_peak = 278

CPU2017 License: 9016

Test Date: Mar-2023

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2022

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

621.wrf\_s (continued):

```
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

627.cam4\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdaloc
-lflang
```

628.pop2\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactusBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS520A-E12-RS12U  
(2.75 GHz, AMD EPYC 9454P)

**SPECSpeed®2017\_fp\_base = 264**

**SPECSpeed®2017\_fp\_peak = 278**

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Mar-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-08 08:01:55-0500.

Report generated on 2023-03-29 00:38:30 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-28.