



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

**SPECSpeed®2017\_fp\_base = 323**

**SPECSpeed®2017\_fp\_peak = 324**

CPU2017 License: 9019


Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

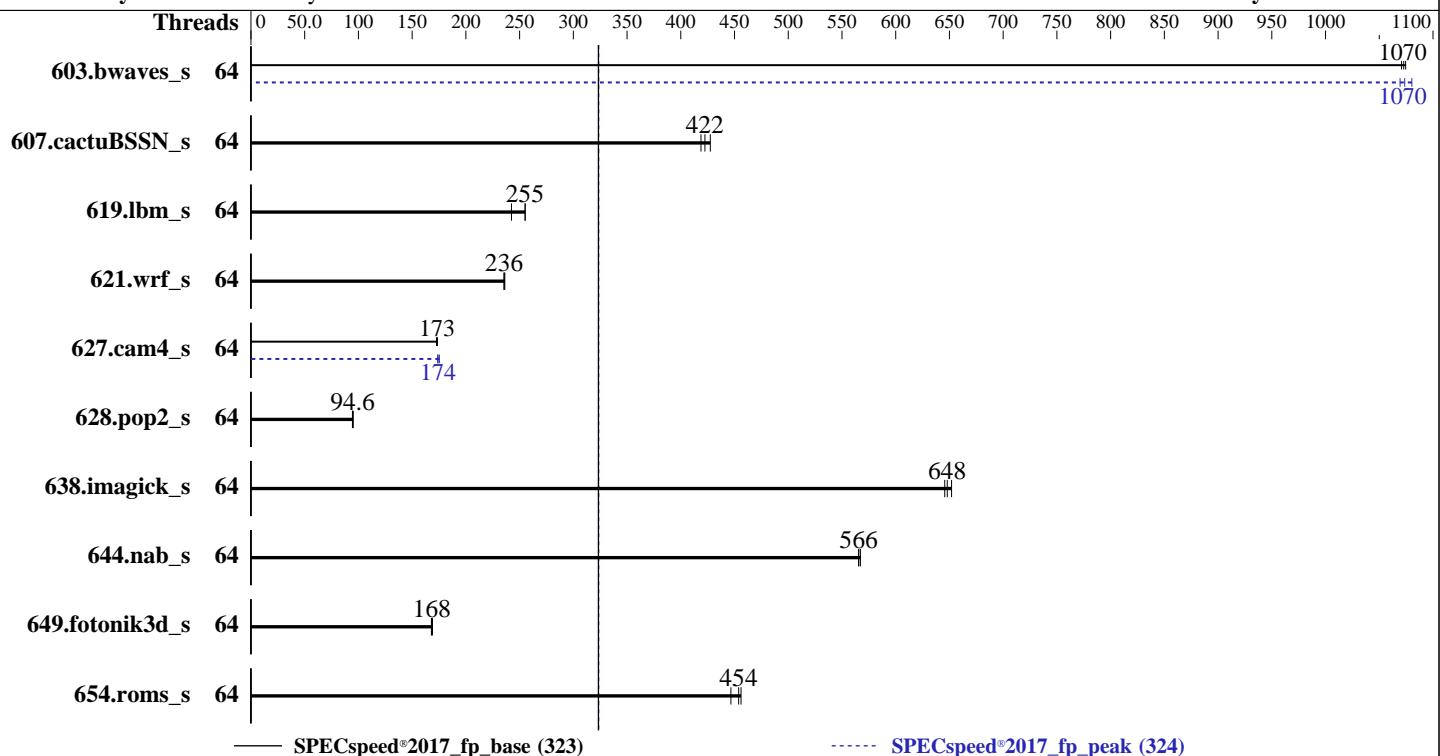

Hardware		Software	
CPU Name:	Intel Xeon Gold 6448Y	OS:	SUSE Linux Enterprise Server 15 SP4
Max MHz:	4100	Compiler:	5.14.21-150400.22-default
Nominal:	2100	Parallel:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	64 cores, 2 chips	Firmware:	Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Orderable:	1,2 Chips	File System:	Yes
Cache L1:	32 KB I + 48 KB D on chip per core	System State:	Version 5.1.1a released Feb-2023
L2:	2 MB I+D on chip per core	Base Pointers:	Run level 3 (multi-user)
L3:	60 MB I+D on chip per chip	Peak Pointers:	64-bit
Other:	None	Other:	64-bit
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)	Power Management:	jemalloc memory allocator V5.0.1
Storage:	1 x 960 GB M.2 SSD SATA	BIOS set to prefer performance at the cost of additional power usage	
Other:	None		



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

**SPECSpeed®2017\_fp\_base = 323**

**SPECSpeed®2017\_fp\_peak = 324**

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	55.1	1070	54.9	1070	<b>55.0</b>	<b>1070</b>	64	54.6	1080	<b>54.9</b>	<b>1070</b>	55.2	1070
607.cactuBSSN_s	64	39.8	419	39.0	427	<b>39.5</b>	<b>422</b>	64	39.8	419	39.0	427	<b>39.5</b>	<b>422</b>
619.lbm_s	64	<b>20.5</b>	<b>255</b>	21.6	242	20.5	255	64	<b>20.5</b>	<b>255</b>	21.6	242	20.5	255
621.wrf_s	64	56.0	236	56.2	236	<b>56.1</b>	<b>236</b>	64	56.0	236	56.2	236	<b>56.1</b>	<b>236</b>
627.cam4_s	64	51.1	173	<b>51.2</b>	<b>173</b>	51.3	173	64	<b>50.9</b>	<b>174</b>	51.0	174	50.6	175
628.pop2_s	64	126	94.4	<b>125</b>	<b>94.6</b>	125	95.2	64	126	94.4	<b>125</b>	<b>94.6</b>	125	95.2
638.imagick_s	64	22.3	646	<b>22.3</b>	<b>648</b>	22.1	652	64	22.3	646	<b>22.3</b>	<b>648</b>	22.1	652
644.nab_s	64	30.8	567	30.9	565	<b>30.9</b>	<b>566</b>	64	30.8	567	30.9	565	<b>30.9</b>	<b>566</b>
649.fotonik3d_s	64	54.3	168	54.0	169	<b>54.2</b>	<b>168</b>	64	54.3	168	54.0	169	<b>54.2</b>	<b>168</b>
654.roms_s	64	<b>34.7</b>	<b>454</b>	35.3	447	34.5	456	64	<b>34.7</b>	<b>454</b>	35.3	447	34.5	456

**SPECSpeed®2017\_fp\_base = 323**

**SPECSpeed®2017\_fp\_peak = 324**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

**SPECspeed®2017\_fp\_base = 323**

**SPECspeed®2017\_fp\_peak = 324**

**CPU2017 License:** 9019

**Test Date:** Mar-2023

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Mar-2023

**Tested by:** Cisco Systems

**Software Availability:** Dec-2022

## Platform Notes

### BIOS Settings:

Intel Hyper-Threading Technology set to Disabled  
Sub NUMA Clustering set to Disabled  
LLC Dead Line set to Disabled  
ADDDC Sparing set to Disabled  
Processor C6 Report set to Enabled  
UPI Link Enablement 1  
UPI Power Management Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Mar 24 13:46:43 2023
```

SUT (System Under Test) info as seen by some common utilities.

---

### Table of contents

---

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent\_hugepage
  17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
- 

---

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

SPECSpeed®2017\_fp\_base = 323

SPECSpeed®2017\_fp\_peak = 324

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Platform Notes (Continued)

2. w

```
13:46:43 up 2 min, 1 user, load average: 0.06, 0.05, 0.02
USER     TTY      FROM          LOGIN@    IDLE    JCPU   PCPU WHAT
root     tty1      -           13:45    3.00s  1.03s  0.11s -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126952
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126952
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64
--tune all -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
cores=64 --tune all --output_format all --define drop_caches --nopower --runmode speed --tune base:peak
--size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.006/templogs/preenv.fpspeed.006.0.log --lognum 006.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6448Y
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

SPECSpeed®2017\_fp\_base = 323

SPECSpeed®2017\_fp\_peak = 324

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Platform Notes (Continued)

```
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000161
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 32
siblings         : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6448Y
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              2
Stepping:               8
Frequency boost:       enabled
CPU max MHz:           2101.0000
CPU min MHz:           800.0000
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                           nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                           ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

**SPECspeed®2017\_fp\_base = 323**

**SPECspeed®2017\_fp\_peak = 324**

**CPU2017 License:** 9019

**Test Date:** Mar-2023

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Mar-2023

**Tested by:** Cisco Systems

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
    invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
    tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
    avx2 smep bmi2 erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap
    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
    xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
    cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
    arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
    vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
    bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
    tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
```

Virtualization:

VT-x

L1d cache: 3 MiB (64 instances)

L1i cache: 2 MiB (64 instances)

L2 cache: 128 MiB (64 instances)

L3 cache: 120 MiB (2 instances)

NUMA node(s): 4

NUMA node0 CPU(s): 0-15

NUMA node1 CPU(s): 16-31

NUMA node2 CPU(s): 32-47

NUMA node3 CPU(s): 48-63

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-15

node 0 size: 258042 MB

node 0 free: 256888 MB

node 1 cpus: 16-31

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

SPECSpeed®2017\_fp\_base = 323

SPECSpeed®2017\_fp\_peak = 324

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Platform Notes (Continued)

```
node 1 size: 257694 MB
node 1 free: 257387 MB
node 2 cpus: 32-47
node 2 size: 258009 MB
node 2 free: 257715 MB
node 3 cpus: 48-63
node 3 size: 258014 MB
node 3 free: 257530 MB
node distances:
node   0   1   2   3
  0: 10  20  20  20
  1: 20  10  20  20
  2: 20  20  10  20
  3: 20  20  20  10
```

-----  
9. /proc/meminfo

```
MemTotal:      1056523948 kB
```

-----  
10. who -r

```
run-level 3 Mar 24 13:45
```

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target      Status
multi-user          running
```

-----  
12. Services, from systemctl list-unit-files

```
STATE            UNIT FILES
enabled          apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog
                  lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4
                  wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         autofs blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                  cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once
                  haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load ksm kvm_stat lunmask
                  man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
                  smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect         wickedd
```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=45ccfaea-2135-4a76-bdc1-8f20fdd7be73
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

SPECSpeed®2017\_fp\_base = 323

SPECSpeed®2017\_fp\_peak = 324

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Platform Notes (Continued)

```
splash=silent  
mitigations=auto  
quiet  
security=apparmor
```

-----  
14. cpupower frequency-info

analyzing CPU 0:

```
    current policy: frequency should be within 800 MHz and 2.10 GHz.  
    The governor "ondemand" may decide which speed to use  
    within this range.  
boost state support:  
    Supported: yes  
    Active: yes
```

-----  
15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
16. /sys/kernel/mm/transparent\_hugepage

```
defrag      [always] defer defer+madvise madvise never  
enabled     [always] madvise never  
hpage_pmd_size 2097152  
shmem_enabled always within_size advise [never] deny force
```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

**SPECSpeed®2017\_fp\_base = 323**

**SPECSpeed®2017\_fp\_peak = 324**

**CPU2017 License:** 9019

**Test Date:** Mar-2023

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Mar-2023

**Tested by:** Cisco Systems

**Software Availability:** Dec-2022

## Platform Notes (Continued)

defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

-----  
19. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda5 btrfs 60G 23G 37G 39% /home

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Cisco Systems Inc  
Product: UCSX-210C-M7  
Serial: FCH263873HH

-----  
21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x 0xAD00 HMCG94MEBRA121N 64 GB 2 rank 4800

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: X210M7.5.1.1a.0.0201231806  
BIOS Date: 02/01/2023  
BIOS Revision: 5.29

## Compiler Version Notes

=====

C	619.lbm_s(base, peak) 638.imagick_s(base, peak)
---	-------------------------------------------------

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

SPECSpeed®2017\_fp\_base = 323

SPECSpeed®2017\_fp\_peak = 324

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

| 644.nab\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

**SPECspeed®2017\_fp\_base = 323**

**SPECspeed®2017\_fp\_peak = 324**

**CPU2017 License:** 9019

**Test Date:** Mar-2023

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Mar-2023

**Tested by:** Cisco Systems

**Software Availability:** Dec-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

**SPECSpeed®2017\_fp\_base = 323**

**SPECSpeed®2017\_fp\_peak = 324**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Mar-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6448Y, 2.10GHz)

SPECSpeed®2017\_fp\_base = 323

SPECSpeed®2017\_fp\_peak = 324

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids  
-Ofast -ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

```
649.fotonik3d_s: basepeak = yes
```

```
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: basepeak = yes
```

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-24 13:46:43-0400.

Report generated on 2023-04-12 12:46:25 by CPU2017 PDF formatter v6442.

Originally published on 2023-04-11.