



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573


Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

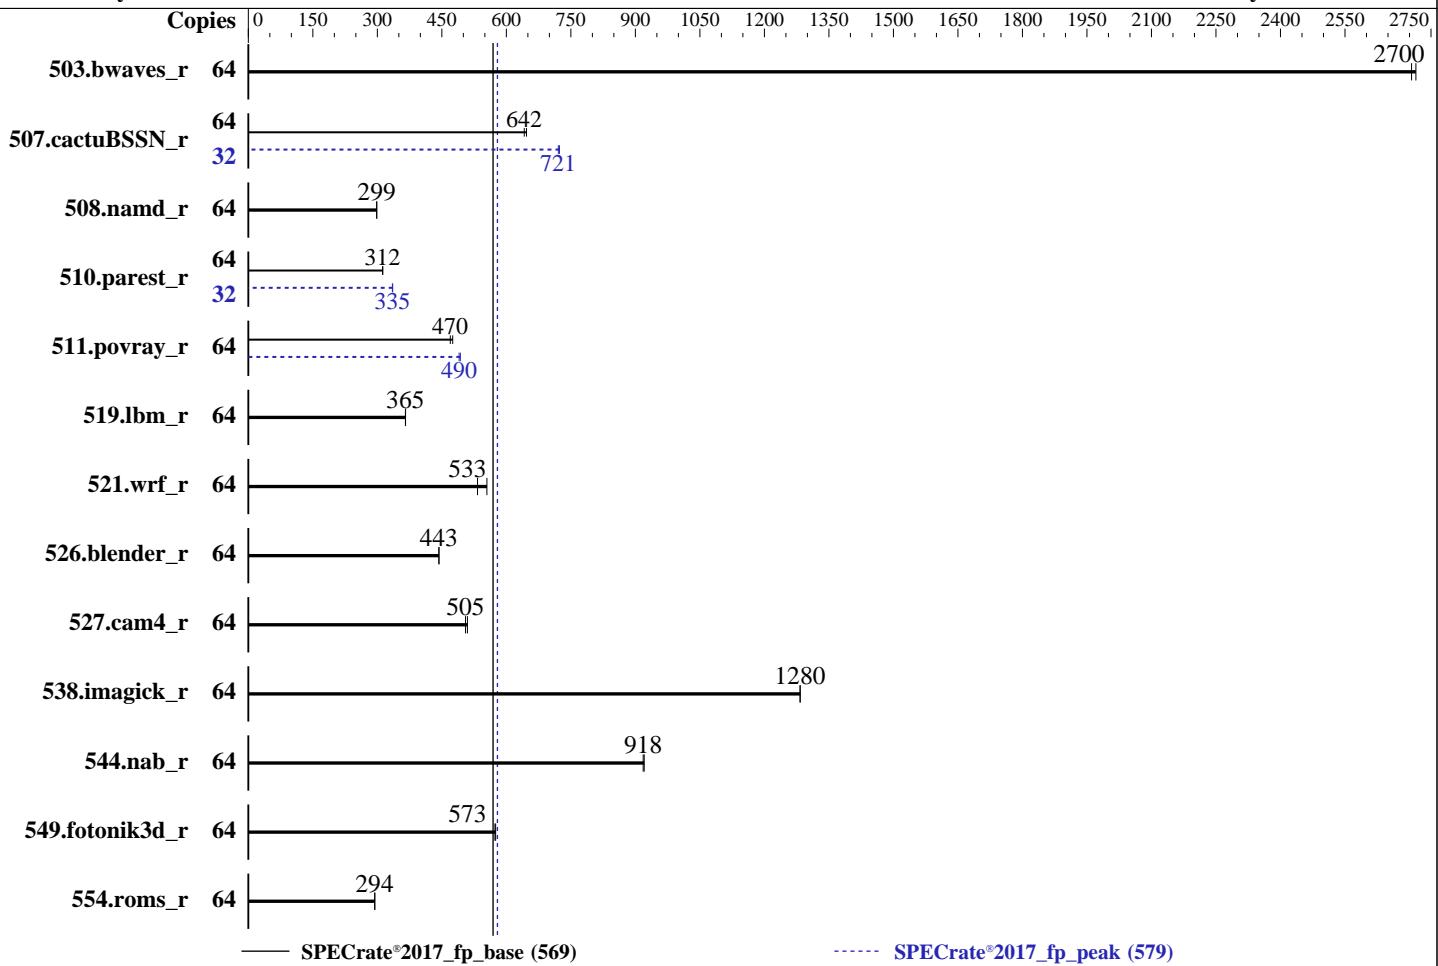

Hardware		Software	
CPU Name:	Intel Xeon Gold 6434H	OS:	Red Hat Enterprise Linux 9.0 (Plow)
Max MHz:	4100		5.14.0-70.13.1.el9_0.x86_64
Nominal:	3700	Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	32 cores, 4 chips, 2 threads/core		Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Orderable:	2,4 chips	Parallel:	No
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version 1.4.0 released Mar-2023
L2:	2 MB I+D on chip per core	File System:	tmpfs
L3:	22.5 MB I+D on chip per chip	System State:	Run level 5 (graphical multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)	Peak Pointers:	64-bit
Storage:	60 GB on tmpfs	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	236	2710	<u>237</u>	<u>2700</u>			64	236	2710	<u>237</u>	<u>2700</u>		
507.cactusBSSN_r	64	<u>126</u>	<u>642</u>	125	647			32	56.0	723	<u>56.2</u>	<u>721</u>		
508.namd_r	64	<u>204</u>	<u>299</u>	204	299			64	<u>204</u>	<u>299</u>	204	299		
510.parest_r	64	536	313	<u>536</u>	<u>312</u>			32	<u>250</u>	<u>335</u>	249	336		
511.povray_r	64	<u>318</u>	<u>470</u>	314	475			64	<u>305</u>	<u>490</u>	303	493		
519.lbm_r	64	<u>185</u>	<u>365</u>	185	366			64	<u>185</u>	<u>365</u>	185	366		
521.wrf_r	64	258	555	<u>269</u>	<u>533</u>			64	258	555	<u>269</u>	<u>533</u>		
526.blender_r	64	<u>220</u>	<u>443</u>	220	443			64	<u>220</u>	<u>443</u>	220	443		
527.cam4_r	64	220	509	<u>222</u>	<u>505</u>			64	220	509	<u>222</u>	<u>505</u>		
538.imagick_r	64	<u>124</u>	<u>1280</u>	124	1280			64	<u>124</u>	<u>1280</u>	124	1280		
544.nab_r	64	<u>117</u>	<u>918</u>	117	921			64	<u>117</u>	<u>918</u>	117	921		
549.fotonik3d_r	64	<u>435</u>	<u>573</u>	434	575			64	<u>435</u>	<u>573</u>	434	575		
554.roms_r	64	<u>346</u>	<u>294</u>	346	294			64	<u>346</u>	<u>294</u>	346	294		

SPECrate®2017_fp_base = 569

SPECrate®2017_fp_peak = 579

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:
`sync; echo 3 > /proc/sys/vm/drop_caches`
 runcpu command invoked through numactl i.e.:
`numactl --interleave=all runcpu <etc>`
`jemalloc`, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    DCU Streamer Prefetcher : Disabled
        Sub NUMA Cluster : 2-way Clustering
        LLC Prefetch : Disabled
    Dead Line LLC Alloc : Disabled
        Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
    C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
        PCI ASPM L1 Link
        Power Management : Disabled
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Mar 30 04:21:22 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
-----
2. w
04:21:22 up 3:09, 1 user, load average: 41.30, 58.28, 61.55
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root :1 01:12 ?xdm? 2:37 0.00s /usr/libexec/gdm-x-session --register-session --run-script
gnome-session
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 8254847
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8254847
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
/usr/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-SNC=2 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=2 --output_format
csv,html,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=2 --output_format
csv,html,txt --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
-----  
6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6434H  
vendor_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 7  
microcode : 0x2b0001b0  
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores : 8  
siblings : 16  
4 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0-7  
physical id 1: core ids 0-7  
physical id 2: core ids 0-7  
physical id 3: core ids 0-7  
physical id 0: apicids 0-15  
physical id 1: apicids 128-143  
physical id 2: apicids 256-271  
physical id 3: apicids 384-399
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:  
Architecture: x86_64  
CPU op-mode(s): 32-bit, 64-bit  
Address sizes: 46 bits physical, 57 bits virtual  
Byte Order: Little Endian  
CPU(s): 64  
On-line CPU(s) list: 0-63  
Vendor ID: GenuineIntel  
BIOS Vendor ID: Intel  
Model name: Intel(R) Xeon(R) Gold 6434H  
BIOS Model name: Intel(R) Xeon(R) Gold 6434H  
CPU family: 6  
Model: 143  
Thread(s) per core: 2  
Core(s) per socket: 8  
Socket(s): 4  
Stepping: 7  
BogoMIPS: 7400.00  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology  
nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx snap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavenc
xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbm2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

Virtualization:
VT-x

L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)

L2 cache: 64 MiB (32 instances)

L3 cache: 90 MiB (4 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0,8,16,24,32,40,48,56

NUMA node1 CPU(s): 4,12,20,28,36,44,52,60

NUMA node2 CPU(s): 1,9,17,25,33,41,49,57

NUMA node3 CPU(s): 5,13,21,29,37,45,53,61

NUMA node4 CPU(s): 2,10,18,26,34,42,50,58

NUMA node5 CPU(s): 6,14,22,30,38,46,54,62

NUMA node6 CPU(s): 3,11,19,27,35,43,51,59

NUMA node7 CPU(s): 7,15,23,31,39,47,55,63

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	22.5M	90M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0,8,16,24,32,40,48,56

node 0 size: 257498 MB

node 0 free: 254780 MB

node 1 cpus: 4,12,20,28,36,44,52,60

node 1 size: 258046 MB

node 1 free: 248537 MB

node 2 cpus: 1,9,17,25,33,41,49,57

node 2 size: 258046 MB

node 2 free: 257373 MB

node 3 cpus: 5,13,21,29,37,45,53,61

node 3 size: 258046 MB

node 3 free: 257431 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 4 cpus: 2,10,18,26,34,42,50,58
node 4 size: 258046 MB
node 4 free: 256856 MB
node 5 cpus: 6,14,22,30,38,46,54,62
node 5 size: 258046 MB
node 5 free: 257139 MB
node 6 cpus: 3,11,19,27,35,43,51,59
node 6 size: 258046 MB
node 6 free: 257326 MB
node 7 cpus: 7,15,23,31,39,47,55,63
node 7 size: 257998 MB
node 7 free: 257317 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  12  21  21  21  21  21  21
  1: 12  10  21  21  21  21  21  21
  2: 21  21  10  12  21  21  21  21
  3: 21  21  12  10  21  21  21  21
  4: 21  21  21  21  10  12  21  21
  5: 21  21  21  21  12  10  21  21
  6: 21  21  21  21  21  21  10  12
  7: 21  21  21  21  21  21  12  10
```

```
-----  
9. /proc/meminfo  
MemTotal:      2113304040 kB
```

```
-----  
10. who -r  
run-level 5 Mar 30 01:12
```

```
-----  
11. Systemd service manager version: systemd 250 (250-6.el9_0)  
Default Target  Status  
graphical       running
```

```
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
               accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker gdm getty@  
               insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors  
               low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname  
               nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon  
               qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd  
               sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgaauthd  
               virtqemud vmtoolsd
enabled-runtime systemdr-emount-fs
disabled       arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown  
               canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower  
               cups-browsed dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld  
               grafana-server gssproxy httpd httpd@ ibacm iprdump iprinit iprule ipsec iscsid iscsiuio  
               kpatch kvm_stat ledmon libvirt-guests libvirtfd llpad man-db-restart-cache-update named  
               named-chroot nfss-blkmap nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm  
               pmlogger_farm pmproxy podman podman-auto-update podman-restart postfix powertop psacct  
               ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd  
               serial-getty@ smb snmpd snmptrapd spamassassin speech-dispatcherd srp_daemon  
               srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures systemd-nspawn@  
               systemd-pstore systemd-sysext target targetclid tog-pegsus trace-cmd virtinterfaced  
               virtnetworkd virtnodededevd virtnwffilterd virtproxoyd virtsecretd virtstoraged vsftpd
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```
wpa_supplicant  
indirect      pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo  
              virtlockd virtlogd vsftpd@  
  
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64  
    root=/dev/mapper/rhel-root  
    ro  
    resume=/dev/mapper/rhel-swap  
    rd.lvm.lv=rhel/root  
    rd.lvm.lv=rhel/swap  
    rhgb  
    quiet  
  
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes  
  
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs    3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy     0  
vm.nr_overcommit_hugepages    0  
vm.swappiness                  60  
vm.watermark_boost_factor     15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode          0  
  
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled   always within_size advise [never] deny force  
  
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag             1  
max_ptes_none      511  
max_ptes_shared    256  
max_ptes_swap      64  
pages_to_scan      4096
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 60G 4.2G 56G 7% /mnt/ramdisk

20. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R960
Product Family: PowerEdge

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
2x 00AD00B300AD HMCG94MEBRA121N 64 GB 2 rank 4800
30x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.4.0
BIOS Date: 03/15/2023
BIOS Revision: 1.4

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 569

PowerEdge R960 (Intel Xeon Gold 6434H)

SPECrate®2017_fp_peak = 579

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-29 16:21:22-0400.

Report generated on 2023-09-13 20:13:27 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.