



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

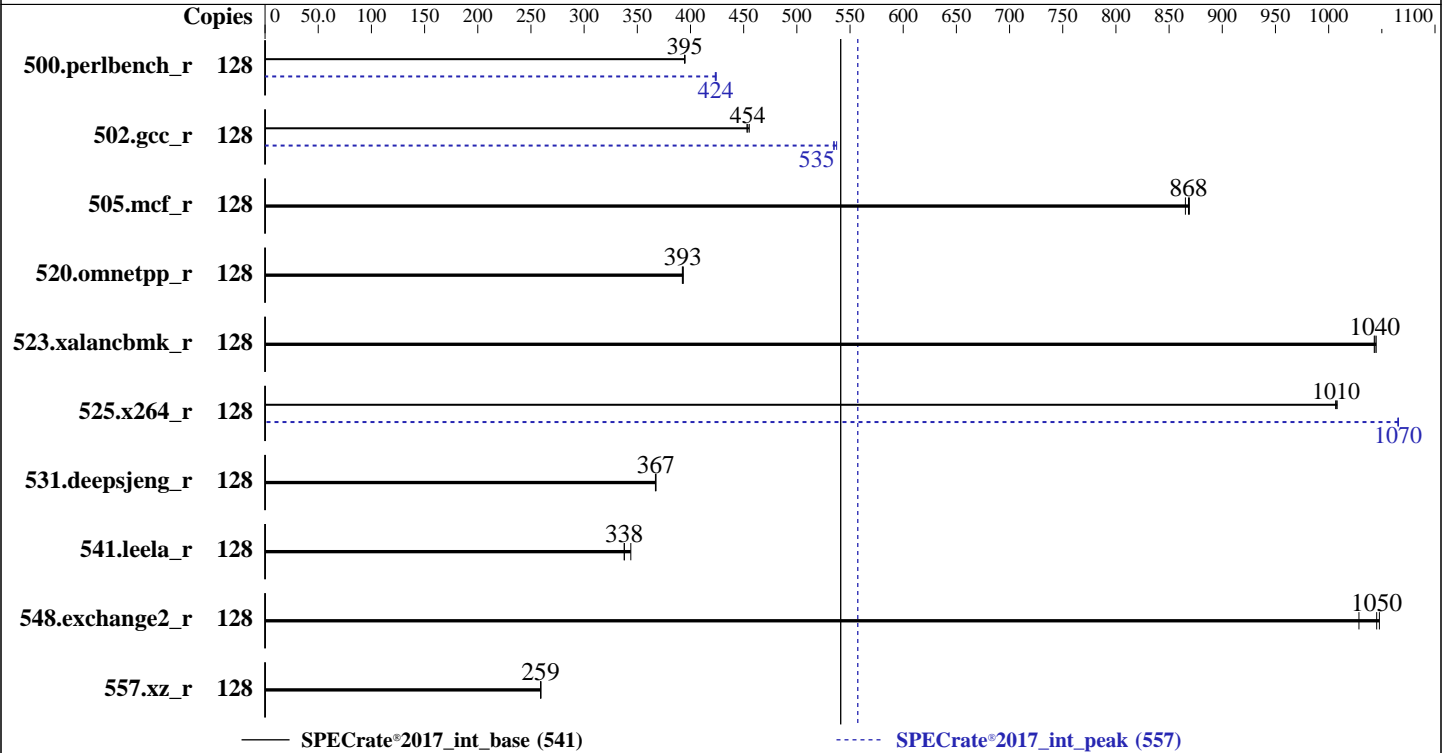

### Hardware

CPU Name: Intel Xeon Gold 6430  
 Max MHz: 3400  
 Nominal: 2100  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)  
 Storage: 1 x 1920 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.00.55 Released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jun-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	517	394	<b>516</b>	<b>395</b>	516	395	128	<b>481</b>	<b>424</b>	481	423	480	424
502.gcc_r	128	400	453	398	455	<b>399</b>	<b>454</b>	128	339	535	337	537	<b>339</b>	<b>535</b>
505.mcf_r	128	239	865	238	869	<b>238</b>	<b>868</b>	128	239	865	238	869	<b>238</b>	<b>868</b>
520.omnetpp_r	128	428	392	<b>428</b>	<b>393</b>	427	393	128	428	392	<b>428</b>	<b>393</b>	427	393
523.xalancbmk_r	128	130	1040	<b>130</b>	<b>1040</b>	129	1040	128	130	1040	<b>130</b>	<b>1040</b>	129	1040
525.x264_r	128	<b>223</b>	<b>1010</b>	223	1010	222	1010	128	210	1070	210	1070	<b>210</b>	<b>1070</b>
531.deepsjeng_r	128	400	367	<b>399</b>	<b>367</b>	399	367	128	400	367	<b>399</b>	<b>367</b>	399	367
541.leela_r	128	616	344	628	338	<b>628</b>	<b>338</b>	128	616	344	628	338	<b>628</b>	<b>338</b>
548.exchange2_r	128	320	1050	<b>321</b>	<b>1050</b>	326	1030	128	320	1050	<b>321</b>	<b>1050</b>	326	1030
557.xz_r	128	<b>533</b>	<b>259</b>	534	259	533	259	128	<b>533</b>	<b>259</b>	534	259	533	259

SPECrate®2017\_int\_base = **541**

SPECrate®2017\_int\_peak = **557**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/spec2017-1.1.9-ic2023/lib/intel64:/home/spec2017-1.1.9-ic2023/lib/ia32:/home/spec2017-1.1.9-ic2023/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
 memory using Red Hat Enterprise Linux 8.4  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>  
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
 is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
 is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
 is mitigated in the system as tested and documented.  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
 Performance Profile Set to Performance  
 SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/spec2017-1.1.9-ic2023/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost.localdomain Fri Jun 9 17:55:58 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 250 (250-6.el9\_0)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. tuned-adm active
  17. sysctl
  18. /sys/kernel/mm/transparent\_hugepage
  19. /sys/kernel/mm/transparent\_hugepage/khugepaged
  20. OS release
  21. Disk information
  22. /sys/devices/virtual/dmi/id
  23. dmidecode
  24. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

-----  
1. `uname -a`  
Linux localhost.localdomain 5.14.0-70.13.1.el9\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux

-----  
2. `w`  
17:55:58 up 12 min, 1 user, load average: 0.00, 0.02, 0.05  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 17:52 1:09 1.45s 0.06s -bash

-----  
3. Username  
From environment variable \$USER: root

-----  
4. `ulimit -a`  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2060168  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2060168  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

-----  
5. `sysinfo process ancestry`  
/usr/lib/systemd/systemd --switched-root --system --deserialize 28  
login -- root  
-bash  
-bash  
runcpu --define default-platform-flags --copies 128 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg  
--define smt-on --define cores=64 --define physicalfirst --define invoke\_with\_interleave --define  
drop\_caches --tune base,peak --iterations 3 -o all intrate  
runcpu --define default-platform-flags --copies 128 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak --iterations 3 --output\_format all  
--nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.053/templogs/preenv.intrate.053.0.log --lognum 053.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/spec2017-1.1.9-ic2023

-----  
6. `/proc/cpuinfo`  
model name : Intel(R) Xeon(R) Gold 6430  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b000111

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
bugs          : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6430
BIOS Model name:      Intel(R) Xeon(R) Gold 6430
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                      invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                      clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                      avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                      enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                      amx_tile flush_l1d arch_capabilities

Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-7,64-71
NUMA node1 CPU(s):    8-15,72-79
NUMA node2 CPU(s):    16-23,80-87
NUMA node3 CPU(s):    24-31,88-95
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

NUMA node4 CPU(s):      32-39,96-103
NUMA node5 CPU(s):      40-47,104-111
NUMA node6 CPU(s):      48-55,112-119
NUMA node7 CPU(s):      56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 63569 MB
node 0 free: 60772 MB
node 1 cpus: 8-15,72-79
node 1 size: 64508 MB
node 1 free: 64244 MB
node 2 cpus: 16-23,80-87
node 2 size: 64508 MB
node 2 free: 64189 MB
node 3 cpus: 24-31,88-95
node 3 size: 64508 MB
node 3 free: 64179 MB
node 4 cpus: 32-39,96-103
node 4 size: 64508 MB
node 4 free: 64247 MB
node 5 cpus: 40-47,104-111
node 5 size: 64508 MB
node 5 free: 64123 MB
node 6 cpus: 48-55,112-119
node 6 size: 64508 MB
node 6 free: 61068 MB
node 7 cpus: 56-63,120-127
node 7 size: 64461 MB
node 7 free: 64125 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

9. /proc/meminfo  
MemTotal: 527444084 kB

10. who -r  
run-level 3 Jun 9 17:43

11. Systemd service manager version: systemd 250 (250-6.el9\_0)  
Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond  
dbus-broker getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname  
rhsmcrted rsyslog selinux-autorelabel-mark sep5 sshd sssd sysstat  
systemd-network-generator tuned udisks2 upower  
enabled-runtime systemd-remount-fs  
disabled arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell firewalld  
kvm\_stat man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild  
serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9\_0.x86\_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap

15. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

16. tuned-adm active  
Current active profile: throughput-performance

17. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
21. Disk information
SPEC is set to: /home/spec2017-1.1.9-ic2023
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   1.7T  250G  1.5T  15% /home

```

```

-----
22. /sys/devices/virtual/dmi/id
Vendor:          XFUSION
Product:         2288H V7
Product Family:  Eagle Stream
Serial:          serial

```

```

-----
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4400

-----  
24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: XFUSION  
BIOS Version: 2.00.55  
BIOS Date: 03/07/2023  
BIOS Revision: 0.55

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbnk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 541

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECrate®2017\_int\_peak = 557

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-09 05:55:57-0400.

Report generated on 2024-01-29 17:52:40 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-04.