



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

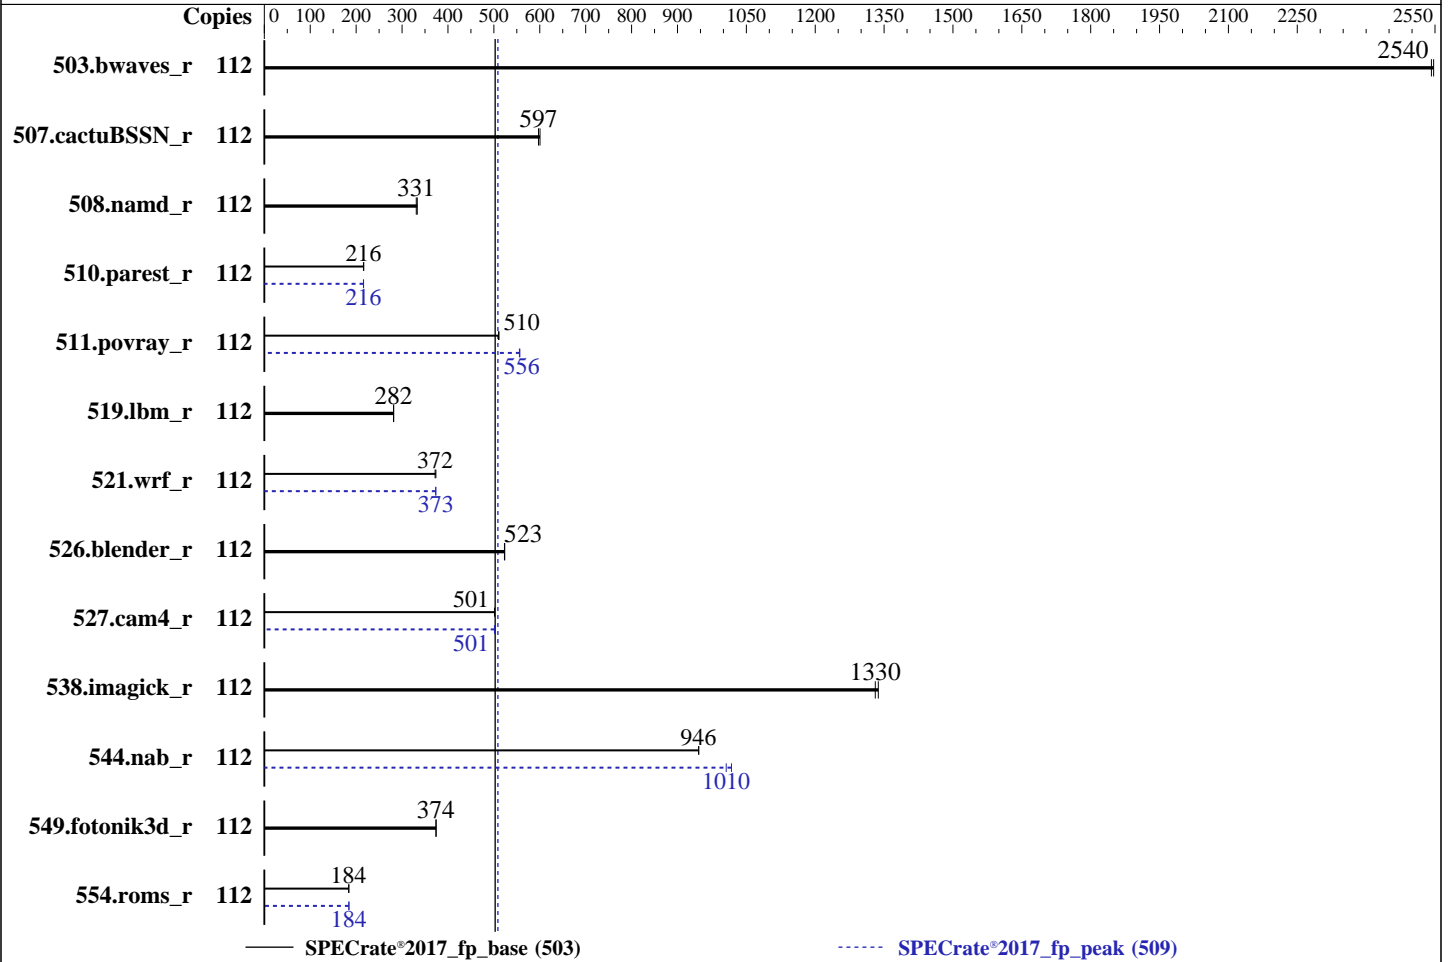

Hardware

CPU Name: Intel Xeon Gold 6348
 Max MHz: 3500
 Nominal: 2600
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 42 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 1920 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 1.55 Released May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	441	2550	<u>442</u>	<u>2540</u>			112	441	2550	<u>442</u>	<u>2540</u>		
507.cactuBSSN_r	112	236	600	<u>237</u>	<u>597</u>			112	236	600	<u>237</u>	<u>597</u>		
508.namd_r	112	319	333	<u>321</u>	<u>331</u>			112	319	333	<u>321</u>	<u>331</u>		
510.parest_r	112	1352	217	<u>1357</u>	<u>216</u>			112	1355	216	<u>1357</u>	<u>216</u>		
511.povray_r	112	512	511	<u>513</u>	<u>510</u>			112	<u>471</u>	<u>556</u>	470	557		
519.lbm_r	112	<u>419</u>	<u>282</u>	419	282			112	<u>419</u>	<u>282</u>	419	282		
521.wrf_r	112	671	374	<u>674</u>	<u>372</u>			112	672	374	<u>672</u>	<u>373</u>		
526.blender_r	112	<u>326</u>	<u>523</u>	326	524			112	<u>326</u>	<u>523</u>	326	524		
527.cam4_r	112	<u>391</u>	<u>501</u>	391	501			112	390	502	<u>391</u>	<u>501</u>		
538.imagick_r	112	208	1340	<u>209</u>	<u>1330</u>			112	208	1340	<u>209</u>	<u>1330</u>		
544.nab_r	112	199	946	<u>199</u>	<u>946</u>			112	<u>187</u>	<u>1010</u>	185	1020		
549.fotonik3d_r	112	1166	374	<u>1168</u>	<u>374</u>			112	1166	374	<u>1168</u>	<u>374</u>		
554.roms_r	112	<u>969</u>	<u>184</u>	966	184			112	<u>966</u>	<u>184</u>	966	184		

SPECrate®2017_fp_base = **503**

SPECrate®2017_fp_peak = **509**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017-icc2023.0/lib/intel64:/spec2017-icc2023.0/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enabled SNC2 (2-clusters)

Sysinfo program /spec2017-icc2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Jun 29 15:19:04 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-45.e18)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021 x86_64 x86_64 x86_64
GNU/Linux

2. w
15:19:04 up 0 min, 1 user, load average: 0.76, 0.26, 0.09
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 15:18 8.00s 1.20s 0.00s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2060529
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2060529
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 17
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 112 -c ic2023.0-lin-core-avx512-rate-20221201.cfg --define
smt-on --define cores=56 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base,peak --iterations 2 -o all fprate
runcpu --define default-platform-flags --copies 112 --configfile ic2023.0-lin-core-avx512-rate-20221201.cfg
--define smt-on --define cores=56 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak --iterations 2 --output_format all --nopower --runmode rate --tune base:peak
--size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.055/templogs/preenv.fprate.055.0.log --lognum 055.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec2017-icc2023.0
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6348 CPU @ 2.60GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping      : 6
microcode     : 0xd000363
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 28
siblings      : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-27
physical id 1: core ids 0-27
physical id 0: apicids 0-55
physical id 1: apicids 128-183
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.32.1:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s):         2
NUMA node(s):     4
Vendor ID:         GenuineIntel
BIOS Vendor ID:   Intel(R) Corporation
CPU family:        6
Model:             106
Model name:        Intel(R) Xeon(R) Gold 6348 CPU @ 2.60GHz
BIOS Model name:   Intel(R) Xeon(R) Gold 6348 CPU @ 2.60GHz
Stepping:          6
CPU MHz:           3400.000
BogoMIPS:          5200.00
Virtualization:    VT-x
L1d cache:         48K
L1i cache:         32K
L2 cache:          1280K
L3 cache:          43008K
NUMA node0 CPU(s): 0-13,56-69
NUMA node1 CPU(s): 14-27,70-83
NUMA node2 CPU(s): 28-41,84-97
NUMA node3 CPU(s): 42-55,98-111
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                    acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                    arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
                    pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                    3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp
                    ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
                    hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                    clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                    xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
                    dtherm ida arat pln pts hwp_epp avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
                    vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear
                    pconfig flush_lld arch_capabilities

```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-13,56-69
node 0 size: 128154 MB
node 0 free: 127485 MB
node 1 cpus: 14-27,70-83
node 1 size: 128980 MB
node 1 free: 128537 MB
node 2 cpus: 28-41,84-97
node 2 size: 129017 MB
node 2 free: 128340 MB
node 3 cpus: 42-55,98-111

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

```
node 3 size: 129015 MB
node 3 free: 128537 MB
node distances:
node 0 1 2 3
0: 10 11 20 20
1: 11 10 20 20
2: 20 20 10 11
3: 20 20 11 10
```

```
-----
9. /proc/meminfo
MemTotal:      527532920 kB
```

```
-----
10. who -r
run-level 3 Jun 29 15:18
```

```
-----
11. Systemd service manager version: systemd 239 (239-45.el8)
Default Target Status
multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd
crond firewalld getty@ import-state irqbalance iscsi iscsi-onboot kdump libstoragemgmt
loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd syslog
sysstat timedatex tuned udisks2 vdo
disabled arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables iprdump
iprinit iprupdate ipsec iscsid iscsiui kpatch kvm_stat ledmon nftables nvme-fc-autoconnect oddjobd
psacct rdisc rhcd rhsm rhsm-facts serial-getty@ sshd-keygen@ systemd-resolved tcsd
generated SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
gcc-toolset-9-stap-server gcc-toolset-9-systemtap scripts startup
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-4.18.0-305.el8.x86_64
root=UUID=711de346-1631-4b60-a626-37488271d525
ro
crashkernel=auto
resume=UUID=d6a3ac10-1eal-4e42-a80b-54c427bcad19
rhgb
quiet
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. tuned-adm active
No current active profile.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	0
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

```
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 8.4 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release Red Hat Enterprise Linux release 8.4 (Ootpa)
```

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

itlb_multihit	Not affected
l1tf	Not affected
mds	Not affected
meltdown	Not affected
spec_store_bypass	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1	Mitigation: usercopy/swaggs barriers and __user pointer sanitization
spectre_v2	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbsds	Not affected
tsx_async_abort	Not affected

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Platform Notes (Continued)

21. Disk information

SPEC is set to: /spec2017-icc2023.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	420G	43G	378G	11%	/

22. /sys/devices/virtual/dmi/id

```
Vendor:      XFUSION
Product:     2288H V6
Product Family: Whitley
Serial:      Serial
```

23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:    XFUSION
BIOS Version:   1.55
BIOS Date:      05/09/2023
BIOS Revision:  1.55
```

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Base Portability Flags (Continued)

508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

```
544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2023
Hardware Availability: Apr-2021
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

544.nab_r (continued):

```
-qopt-zmm-usage=high -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 503

FusionServer 2288H V6 (Intel Xeon Gold 6348)

SPECrate®2017_fp_peak = 509

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-29 15:19:03-0400.

Report generated on 2023-07-19 16:27:05 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.