



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 378

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066


Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

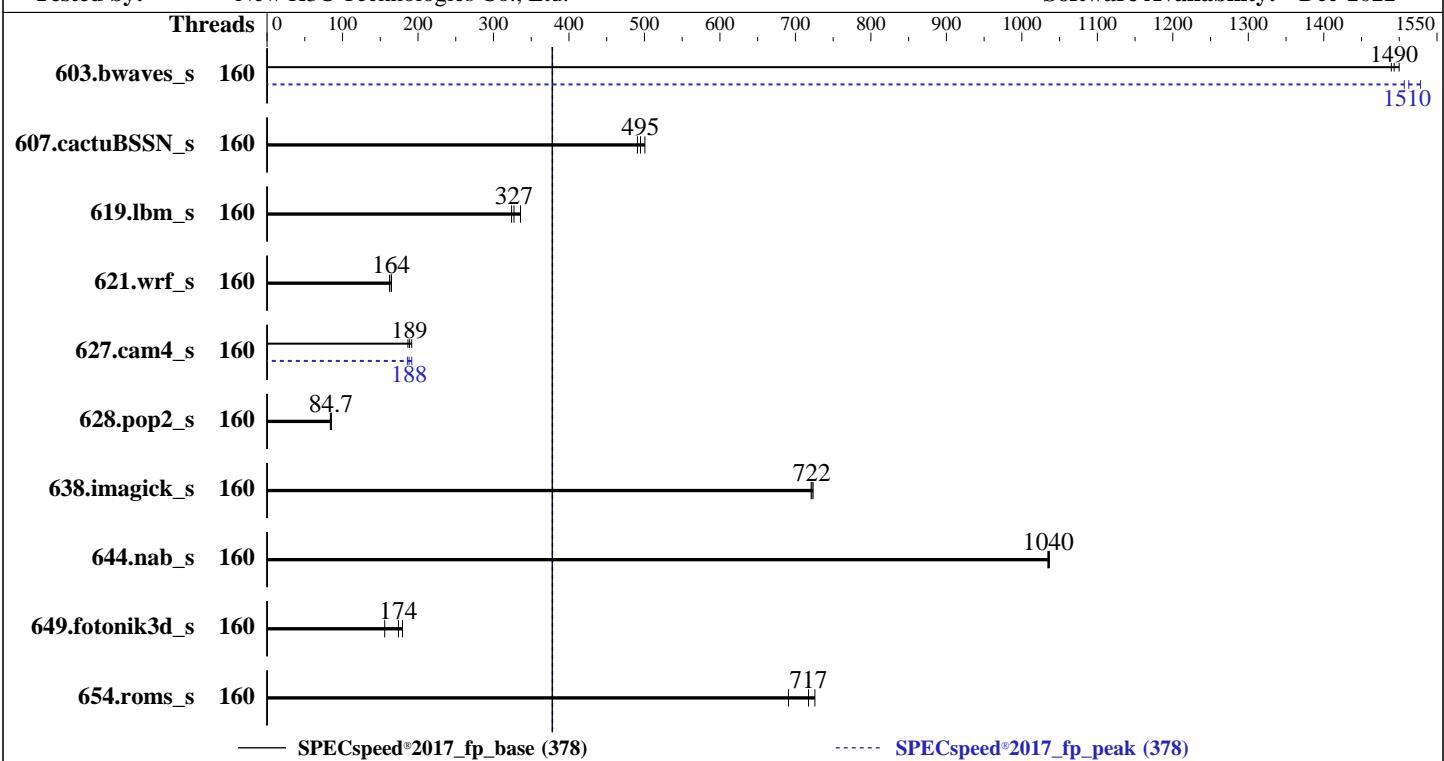

— SPECSpeed®2017_fp_base (378)

----- SPECSpeed®2017_fp_peak (378)

Hardware

CPU Name: Intel Xeon Platinum 8460H
 Max MHz: 3800
 Nominal: 2200
 Enabled: 160 cores, 4 chips
 Orderable: 1,2,3,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 7.68 TB NVME SSD
 Other: None

OS:

Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.22.1.el9_0.x86_64

Compiler:

C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

Parallel:

Yes

Firmware:

Version 5.29 released Jun-2023 BIOS

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

Software



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECSpeed®2017_fp_base = 378

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	160	39.6	1490	<u>39.5</u>	<u>1490</u>	39.3	1500	160	<u>39.0</u>	<u>1510</u>	39.2	1510	38.6	1530
607.cactuBSSN_s	160	33.3	501	<u>33.7</u>	<u>495</u>	34.0	491	160	<u>33.3</u>	<u>501</u>	<u>33.7</u>	<u>495</u>	34.0	491
619.lbm_s	160	16.2	324	<u>16.0</u>	<u>327</u>	15.6	336	160	<u>16.2</u>	<u>324</u>	<u>16.0</u>	<u>327</u>	15.6	336
621.wrf_s	160	81.6	162	<u>80.4</u>	<u>164</u>	80.2	165	160	81.6	162	<u>80.4</u>	<u>164</u>	80.2	165
627.cam4_s	160	46.2	192	<u>46.9</u>	<u>189</u>	47.5	187	160	47.7	186	46.2	192	<u>47.1</u>	<u>188</u>
628.pop2_s	160	142	83.8	139	85.2	<u>140</u>	<u>84.7</u>	160	142	83.8	139	85.2	<u>140</u>	<u>84.7</u>
638.imagick_s	160	20.0	721	19.9	723	<u>20.0</u>	<u>722</u>	160	20.0	721	19.9	723	<u>20.0</u>	<u>722</u>
644.nab_s	160	16.9	1030	<u>16.9</u>	<u>1040</u>	16.9	1040	160	16.9	1030	<u>16.9</u>	<u>1040</u>	16.9	1040
649.fotonik3d_s	160	58.5	156	<u>52.4</u>	<u>174</u>	50.8	179	160	58.5	156	<u>52.4</u>	<u>174</u>	50.8	179
654.roms_s	160	<u>21.9</u>	<u>717</u>	22.8	691	21.7	726	160	<u>21.9</u>	<u>717</u>	22.8	691	21.7	726

SPECSpeed®2017_fp_base = 378

SPECSpeed®2017_fp_peak = 378

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Platform Notes

BIOS Settings:

Set Enable LP [Global] to Single LP

Set Patrol Scrub to Disabled

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 378

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

Set Power Performance Tuning to BIOS Controls EFB
Set ENERGY_PERF_BIAS_CFG_mode to Performance
Set LLC Prefetch to Disabled
Set FB Thread Slicing to Enabled

```
Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Jul 21 14:55:20 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
14:55:20 up 3:58, 2 users, load average: 4.97, 4.71, 2.88
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 10:58 3:16m 0.83s 0.00s -bash
root pts/0 11:38 3:16m 0.01s 0.01s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 378

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
data seg size          (kbytes, -d) unlimited
scheduling priority   (-e) 0
file size             (blocks, -f) unlimited
pending signals       (-i) 4124390
max locked memory    (kbytes, -l) 64
max memory size      (kbytes, -m) unlimited
open files            (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues  (bytes, -q) 819200
real-time priority    (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes    (-u) 4124390
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=160 --tune base,peak -o all --define
  drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=160 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.025/templogs/preenv.fpspeed.025.0.log --lognum 025.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8460H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 6
microcode       : 0x2b000181
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 40
siblings        : 40
4 physical ids (chips)
160 processors (hardware threads)
physical id 0: core ids 0-39
physical id 1: core ids 0-39
physical id 2: core ids 0-39
physical id 3: core ids 0-39
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334
physical id 3: apicids
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECspeed®2017_fp_base = 378

SPECspeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454,456,458,460,462

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	160
On-line CPU(s) list:	0-159
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) Platinum 8460H
BIOS Model name:	Intel(R) Xeon(R) Platinum 8460H
CPU family:	6
Model:	143
Thread(s) per core:	1
Core(s) per socket:	40
Socket(s):	4
Stepping:	6
CPU max MHz:	3800.0000
CPU min MHz:	800.0000
BogoMIPS:	4400.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total cqmm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16 amx_tile flush_ll1d arch_capabilities
Virtualization:	VT-x
L1d cache:	7.5 MiB (160 instances)
L1i cache:	5 MiB (160 instances)
L2 cache:	320 MiB (160 instances)
L3 cache:	420 MiB (4 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0-39
NUMA node1 CPU(s):	40-79
NUMA node2 CPU(s):	80-119
NUMA node3 CPU(s):	120-159
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 378

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	7.5M	12	Data	1	64	1	64
L1i	32K	5M	8	Instruction	1	64	1	64
L2	2M	320M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)

node 0 cpus: 0-39
node 0 size: 257060 MB
node 0 free: 246276 MB
node 1 cpus: 40-79
node 1 size: 258039 MB
node 1 free: 257371 MB
node 2 cpus: 80-119
node 2 size: 258039 MB
node 2 free: 257449 MB
node 3 cpus: 120-159
node 3 size: 258019 MB
node 3 free: 257439 MB
node distances:
node 0 1 2 3
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10

9. /proc/meminfo

MemTotal: 1055906992 kB

10. who -r
run-level 3 Jul 21 10:56

11. Systemd service manager version: systemd 250 (250-6.el9_0)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECspeed®2017_fp_base = 378

SPECspeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon
qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark sep5
smartd sshd sssd switcheroo-control sysstat systemd-network-generator tuned udisks2 upower
vgauthd virtqemud vmtoolsd

enabled-runtime
disabled
arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld grafana-server gssproxy
httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuiio kpatch kvm_stat ledmon
libvirt-guests libvирt lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm pmlogger_farm pmpoxy
podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodeudev virtnwfilterd
virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant

indirect
pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
virtlockd virtlogd vsftpd@

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.e19_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECSpeed®2017_fp_base = 378

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

-----
18. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          [always] madvise never
    hpage_pmd_size   2097152
    shmem_enabled    always within_size advise [never] deny force

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs   10000

-----
20. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
    system-release  Red Hat Enterprise Linux release 9.0 (Plow)

-----
21. Disk information
    SPEC is set to: /home/speccpu
    Filesystem        Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   7.0T  231G  6.7T   4% /home

-----
22. /sys/devices/virtual/dmi/id
    Product Family: Rack

-----
23. dmidecode
    Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        30x Micron MTC20F2085S1RC48BA1 32 GB 2 rank 4800
        1x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800
        1x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

-----
24. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor: American Megatrends International, LLC.
    BIOS Version: 6.00.23
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECSpeed®2017_fp_base = 378

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Date: 06/20/2023
BIOS Revision: 5.29

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C   | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 378

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECspeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_S: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 378

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Date: Jul-2023

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Mar-2023

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6700 G6 (Intel Xeon Platinum 8460H)

SPECSpeed®2017_fp_base = 378

SPECSpeed®2017_fp_peak = 378

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jul-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.xml

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-21 02:55:20-0400.

Report generated on 2023-08-16 14:13:13 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.