



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

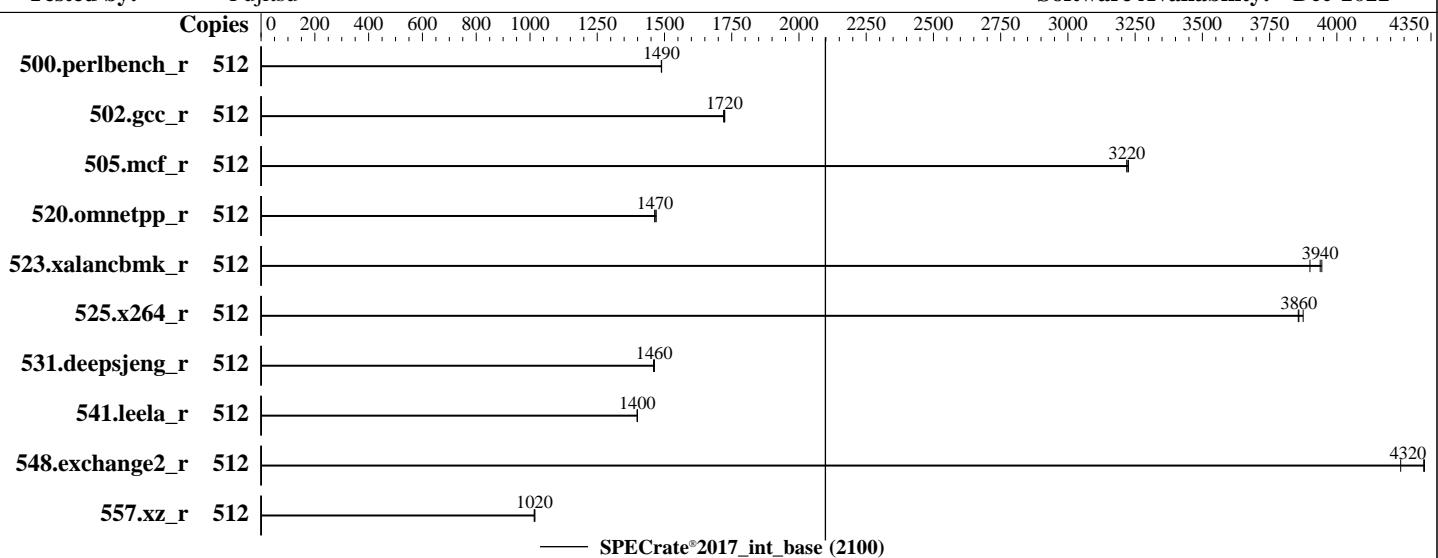

### Hardware

CPU Name: Intel Xeon Platinum 8454H  
Max MHz: 3400  
Nominal: 2100  
Enabled: 256 cores, 8 chips, 2 threads/core  
Orderable: 8 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 82.5 MB I+D on chip per chip  
Other: None  
Memory: 4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x SATA SSD, 3.84TB  
Other: 1 x Fujitsu PRAID EP740i Raid Card

### Software

OS: SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default  
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.2.0 for D4029-C1x. Released Jun-2023 tested as V1.0.0.0 R0.11.0 for D4029-C1x Feb-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

**SPECrate®2017\_int\_base = 2100**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	512	548	1490	547	1490	<b>547</b>	<b>1490</b>									
502.gcc_r	512	422	1720	<b>421</b>	<b>1720</b>	421	1720									
505.mcf_r	512	257	3220	<b>257</b>	<b>3220</b>	257	3230									
520.omnetpp_r	512	459	1460	457	1470	<b>458</b>	<b>1470</b>									
523.xalancbmk_r	512	139	3900	137	3940	<b>137</b>	<b>3940</b>									
525.x264_r	512	232	3860	<b>232</b>	<b>3860</b>	231	3870									
531.deepsjeng_r	512	402	1460	401	1460	<b>401</b>	<b>1460</b>									
541.leela_r	512	606	1400	<b>606</b>	<b>1400</b>	606	1400									
548.exchange2_r	512	310	4330	<b>310</b>	<b>4320</b>	317	4240									
557.xz_r	512	<b>544</b>	<b>1020</b>	545	1020	543	1020									

**SPECrate®2017\_int\_base = 2100**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/benchmark/speccpu/lib/intel64:/home/benchmark/speccpu/lib/ia32:/home/benchmark/speccpu/je5.0.1-
32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2023

Test Sponsor: Fujitsu

Hardware Availability: Jun-2023

Tested by: Fujitsu

Software Availability: Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled  
Adjacent Cache Line Prefetch = Disabled  
CPU C1E Support = Disabled  
SNC (Sub NUMA) = Enable SNC4  
LLC Dead Line Alloc = Disabled  
FAN Control = Full

Sysinfo program /home/benchmark/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Jun 1 04:12:32 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2023

Test Sponsor: Fujitsu

Hardware Availability: Jun-2023

Tested by: Fujitsu

Software Availability: Dec-2022

## Platform Notes (Continued)

1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
04:12:32 up 3 min, 2 users, load average: 9.61, 17.29, 8.11  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 04:11 1:08 0.06s 0.06s -bash  
root pts/0 10.118.163.62 04:11 16.00s 3.08s 0.26s  
/home/benchmark/ptu\_v4.0/UNIFIED\_SERVER\_PTAT\_V4.0.0\_20230110/ptat -mon -i 5000000 -filter 0x3f -y -ts -csv -log

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 16509975  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 16509975  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root@pts/0  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=512 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=256 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=512 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=256 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base --output\_format all --nopower --runmode  
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/benchmark/speccpu

6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8454H  
vendor\_id : GenuineIntel  
cpu family : 6

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2023

Test Sponsor: Fujitsu

Hardware Availability: Jun-2023

Tested by: Fujitsu

Software Availability: Dec-2022

## Platform Notes (Continued)

```
model          : 143
stepping       : 6
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 64
8 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 4: core ids 0-31
physical id 5: core ids 0-31
physical id 6: core ids 0-31
physical id 7: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447
physical id 4: apicids 512-575
physical id 5: apicids 640-703
physical id 6: apicids 768-831
physical id 7: apicids 896-959
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 512
On-line CPU(s) list:    0-511
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8454H
CPU family:              6
Model:                  143
Thread(s) per core:     2
Core(s) per socket:     32
Socket(s):              8
Stepping:                6
CPU max MHz:            3400.0000
CPU min MHz:            800.0000
BogoMIPS:                4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                           nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                           ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                           sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                           lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                           invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
                           tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                           avx2 smep bmi2 erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap
                           avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                           xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occu11c cqmq_mbm_total
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

**SPECrate®2017\_int\_base = 2100**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** 19

**Test Date:** Jun-2023

**Test Sponsor:** Fujitsu

**Hardware Availability:** Jun-2023

**Tested by:** Fujitsu

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
amx_tile flush_lll arch_capabilities
```

Virtualization:

VT-x	
L1d cache:	12 MiB (256 instances)
L1i cache:	8 MiB (256 instances)
L2 cache:	512 MiB (256 instances)
L3 cache:	660 MiB (8 instances)
NUMA node(s):	32
NUMA node0 CPU(s):	0-7, 256-263
NUMA node1 CPU(s):	8-15, 264-271
NUMA node2 CPU(s):	16-23, 272-279
NUMA node3 CPU(s):	24-31, 280-287
NUMA node4 CPU(s):	32-39, 288-295
NUMA node5 CPU(s):	40-47, 296-303
NUMA node6 CPU(s):	48-55, 304-311
NUMA node7 CPU(s):	56-63, 312-319
NUMA node8 CPU(s):	64-71, 320-327
NUMA node9 CPU(s):	72-79, 328-335
NUMA node10 CPU(s):	80-87, 336-343
NUMA node11 CPU(s):	88-95, 344-351
NUMA node12 CPU(s):	96-103, 352-359
NUMA node13 CPU(s):	104-111, 360-367
NUMA node14 CPU(s):	112-119, 368-375
NUMA node15 CPU(s):	120-127, 376-383
NUMA node16 CPU(s):	128-135, 384-391
NUMA node17 CPU(s):	136-143, 392-399
NUMA node18 CPU(s):	144-151, 400-407
NUMA node19 CPU(s):	152-159, 408-415
NUMA node20 CPU(s):	160-167, 416-423
NUMA node21 CPU(s):	168-175, 424-431
NUMA node22 CPU(s):	176-183, 432-439
NUMA node23 CPU(s):	184-191, 440-447
NUMA node24 CPU(s):	192-199, 448-455
NUMA node25 CPU(s):	200-207, 456-463
NUMA node26 CPU(s):	208-215, 464-471
NUMA node27 CPU(s):	216-223, 472-479
NUMA node28 CPU(s):	224-231, 480-487
NUMA node29 CPU(s):	232-239, 488-495
NUMA node30 CPU(s):	240-247, 496-503
NUMA node31 CPU(s):	248-255, 504-511
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	2M	512M	16	Unified	2	2048	1	64
L3	82.5M	660M	15	Unified	3	90112	1	64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2023

Test Sponsor: Fujitsu

Hardware Availability: Jun-2023

Tested by: Fujitsu

Software Availability: Dec-2022

## Platform Notes (Continued)

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 32 nodes (0-31)
node 0 cpus: 0-7,256-263
node 0 size: 128469 MB
node 0 free: 127167 MB
node 1 cpus: 8-15,264-271
node 1 size: 129019 MB
node 1 free: 128648 MB
node 2 cpus: 16-23,272-279
node 2 size: 129019 MB
node 2 free: 128734 MB
node 3 cpus: 24-31,280-287
node 3 size: 129019 MB
node 3 free: 128713 MB
node 4 cpus: 32-39,288-295
node 4 size: 129019 MB
node 4 free: 128799 MB
node 5 cpus: 40-47,296-303
node 5 size: 128985 MB
node 5 free: 128773 MB
node 6 cpus: 48-55,304-311
node 6 size: 129019 MB
node 6 free: 128800 MB
node 7 cpus: 56-63,312-319
node 7 size: 129019 MB
node 7 free: 128801 MB
node 8 cpus: 64-71,320-327
node 8 size: 129019 MB
node 8 free: 128233 MB
node 9 cpus: 72-79,328-335
node 9 size: 129019 MB
node 9 free: 127715 MB
node 10 cpus: 80-87,336-343
node 10 size: 129019 MB
node 10 free: 128130 MB
node 11 cpus: 88-95,344-351
node 11 size: 129019 MB
node 11 free: 128130 MB
node 12 cpus: 96-103,352-359
node 12 size: 129019 MB
node 12 free: 128565 MB
node 13 cpus: 104-111,360-367
node 13 size: 129019 MB
node 13 free: 128715 MB
node 14 cpus: 112-119,368-375
node 14 size: 129019 MB
node 14 free: 128668 MB
node 15 cpus: 120-127,376-383
node 15 size: 129019 MB
node 15 free: 128679 MB
node 16 cpus: 128-135,384-391
node 16 size: 129019 MB
node 16 free: 128686 MB
node 17 cpus: 136-143,392-399
node 17 size: 129019 MB
node 17 free: 128651 MB
node 18 cpus: 144-151,400-407
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2023

Test Sponsor: Fujitsu

Hardware Availability: Jun-2023

Tested by: Fujitsu

Software Availability: Dec-2022

## Platform Notes (Continued)

```
node 18 size: 129019 MB
node 18 free: 128668 MB
node 19 cpus: 152-159,408-415
node 19 size: 129019 MB
node 19 free: 128680 MB
node 20 cpus: 160-167,416-423
node 20 size: 129019 MB
node 20 free: 128817 MB
node 21 cpus: 168-175,424-431
node 21 size: 129019 MB
node 21 free: 128831 MB
node 22 cpus: 176-183,432-439
node 22 size: 129019 MB
node 22 free: 128832 MB
node 23 cpus: 184-191,440-447
node 23 size: 129019 MB
node 23 free: 128801 MB
node 24 cpus: 192-199,448-455
node 24 size: 129019 MB
node 24 free: 128801 MB
node 25 cpus: 200-207,456-463
node 25 size: 129019 MB
node 25 free: 128805 MB
node 26 cpus: 208-215,464-471
node 26 size: 129019 MB
node 26 free: 128808 MB
node 27 cpus: 216-223,472-479
node 27 size: 129019 MB
node 27 free: 128802 MB
node 28 cpus: 224-231,480-487
node 28 size: 129019 MB
node 28 free: 128621 MB
node 29 cpus: 232-239,488-495
node 29 size: 129019 MB
node 29 free: 128656 MB
node 30 cpus: 240-247,496-503
node 30 size: 129019 MB
node 30 free: 128722 MB
node 31 cpus: 248-255,504-511
node 31 size: 128489 MB
node 31 free: 128140 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
 0: 10 12 12 12 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 21 21 21 21 21
 1: 12 10 12 12 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 21 21 21 21 21
 2: 12 12 10 12 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 21 21 21 21 21
 3: 12 12 12 10 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 31 21 21 21 21 21
 21 21 21 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 31 21 21 21 21 21
 4: 21 21 21 21 10 12 12 31 31 31 31 21 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31
 31 31 31 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31
 5: 21 21 21 21 21 12 10 12 31 31 31 31 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21
 31 31 31 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31
 6: 21 21 21 21 21 12 12 10 12 31 31 31 31 21 21 21 21 21 21 21 21 21 21 21 21 21
 31 31 31 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31
 7: 21 21 21 21 21 12 12 10 31 31 31 31 21 21 21 21 21 21 21 21 21 21 21 21 21
 31 31 31 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2023

Test Sponsor: Fujitsu

Hardware Availability: Jun-2023

Tested by: Fujitsu

Software Availability: Dec-2022

## Platform Notes (Continued)

8: 21 21 21 21 21 31 31 31 31 10 12 12 12 21 21 21 21 21 21 21 21 31 31 31 31 31  
31 31 31 21 21 21 21 21 21  
9: 21 21 21 21 31 31 31 31 12 10 12 12 21 21 21 21 21 21 21 21 21 21 31 31 31 31 31  
31 31 31 21 21 21 21  
10: 21 21 21 21 31 31 31 31 12 12 10 12 21 21 21 21 21 21 21 21 21 21 31 31 31 31 31  
31 31 31 21 21 21 21 21  
11: 21 21 21 21 31 31 31 31 12 12 12 10 21 21 21 21 21 21 21 21 21 21 31 31 31 31 31  
31 31 31 21 21 21 21  
12: 31 31 31 31 21 21 21 21 21 21 21 21 21 21 10 12 12 12 31 31 31 21 21 21 21 21 21  
21 21 21 31 31 31 31  
13: 31 31 31 31 21 21 21 21 21 21 21 21 21 12 10 12 12 31 31 31 21 21 21 21 21 21  
21 21 21 31 31 31 31  
14: 31 31 31 31 21 21 21 21 21 21 21 21 21 12 10 12 31 31 31 21 21 21 21 21 21  
21 21 21 31 31 31 31  
15: 31 31 31 31 21 21 21 21 21 21 21 21 21 12 10 31 31 31 21 21 21 21 21 21 21  
21 21 21 31 31 31 31  
16: 31 31 31 31 21 21 21 21 21 21 21 21 21 21 31 31 31 10 12 12 12 21 21 21 21 21  
21 21 21 31 31 31 31  
17: 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 12 10 12 12 21 21 21 21 21  
21 21 21 31 31 31 31  
18: 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 12 12 10 12 21 21 21 21 21  
21 21 21 31 31 31 31  
19: 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 12 12 10 21 21 21 21 21 21  
21 21 21 31 31 31 31  
20: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 21 10 12 12 12 31  
31 31 31 21 21 21 21 21  
21: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 21 12 10 12 12 31  
31 31 31 21 21 21 21  
22: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 21 12 10 12 12 31  
31 31 31 21 21 21 21  
23: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 21 12 10 31 31 31  
31 31 31 21 21 21 21  
24: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 10  
12 12 12 21 21 21 21  
25: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 12  
10 12 12 21 21 21 21  
26: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 12  
12 10 12 21 21 21 21  
27: 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 12  
12 12 10 21 21 21 21  
28: 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21  
21 21 21 10 12 12 12  
29: 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21  
21 21 21 12 10 12 12  
30: 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21  
21 21 21 12 12 10 12  
31: 31 31 31 31 21 21 21 21 21 21 21 21 21 31 31 31 31 31 31 31 31 31 21 21 21 21 21  
21 21 21 12 12 12 10

9. /proc/meminfo  
MemTotal: 4226579376 kB

10. who -r  
run-level 3 Jun 1 04:11

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2023

Test Sponsor: Fujitsu

Hardware Availability: Jun-2023

Tested by: Fujitsu

Software Availability: Dec-2022

## Platform Notes (Continued)

multi-user degraded

```
-----  
12. Failed units, from systemctl list-units --state=failed  
    UNIT          LOAD  ACTIVE SUB   DESCRIPTION  
 * sep5.service   loaded failed failed systemd script to load sep5 driver at boot time  
 * smartd.service loaded failed failed Self Monitoring and Reporting Technology (SMART) Daemon  
  
-----  
13. Services, from systemctl list-unit-files  
    STATE          UNIT FILES  
 enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@  
                  haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor  
 nsqd postfix purge-kernels rollback rsyslog sep5 smartd sshd wicked wickedd-auto4  
 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
 enabled-runtime systemd-remount-fs  
 disabled       accounts-daemon appstream-sync-cache autoofs autoyast-initscripts blk-availability  
 bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups  
 cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once  
 haveged-switch-root ipmi ipmiev4 iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load  
 lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind  
 rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd  
 speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
 systemd-time-wait-sync systemd-timesyncd udisks2 upower  
 indirect       wickedd  
  
-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
 BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
 root=UUID=c13187e0-8b8c-4db9-ba32-defaefe6232c  
 splash=silent  
 mitigations=auto  
 quiet  
 security=apparmor  
 crashkernel=375M,high  
 crashkernel=72M,low  
  
-----  
15. cpupower frequency-info  
 analyzing CPU 0:  
     current policy: frequency should be within 800 MHz and 3.40 GHz.  
             The governor "powersave" may decide which speed to use  
             within this range.  
 boost state support:  
     Supported: yes  
     Active: yes  
  
-----  
16. sysctl  
 kernel.numa_balancing      1  
 kernel.randomize_va_space   2  
 vm.compaction_proactiveness 20  
 vm.dirty_background_bytes   0  
 vm.dirty_background_ratio   10  
 vm.dirty_bytes              0  
 vm.dirty_expire_centisecs  3000  
 vm.dirty_ratio              20  
 vm.dirty_writeback_centisecs 500  
 vm.dirtytime_expire_seconds 43200  
 vm.extfrag_threshold        500
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2023

Test Sponsor: Fujitsu

Hardware Availability: Jun-2023

Tested by: Fujitsu

Software Availability: Dec-2022

## Platform Notes (Continued)

```
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4

-----
20. Disk information
    SPEC is set to: /home/benchmark/speccpu
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sdb2        xfs   3.5T  46G  3.5T  2%  /
    
```

```
21. /sys/devices/virtual/dmi/id
    Vendor:          FUJITSU
    Product:         n/a
    Product Family: SERVER
    Serial:          n/a

-----
22. dmidecode
    Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        7x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
        31x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
        26x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

-----
23. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      FUJITSU
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

BIOS Version: V1.0.0.0 R0.11.0 for D4029-C1x  
BIOS Date: 02/28/2023  
BIOS Revision: 0.11  
Firmware Revision: 1.0

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8454H,  
2.10GHz

SPECrate®2017\_int\_base = 2100

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Base Portability Flags (Continued)

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-31 15:12:31-0400.

Report generated on 2024-01-29 18:05:08 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.