



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120
SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358


Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

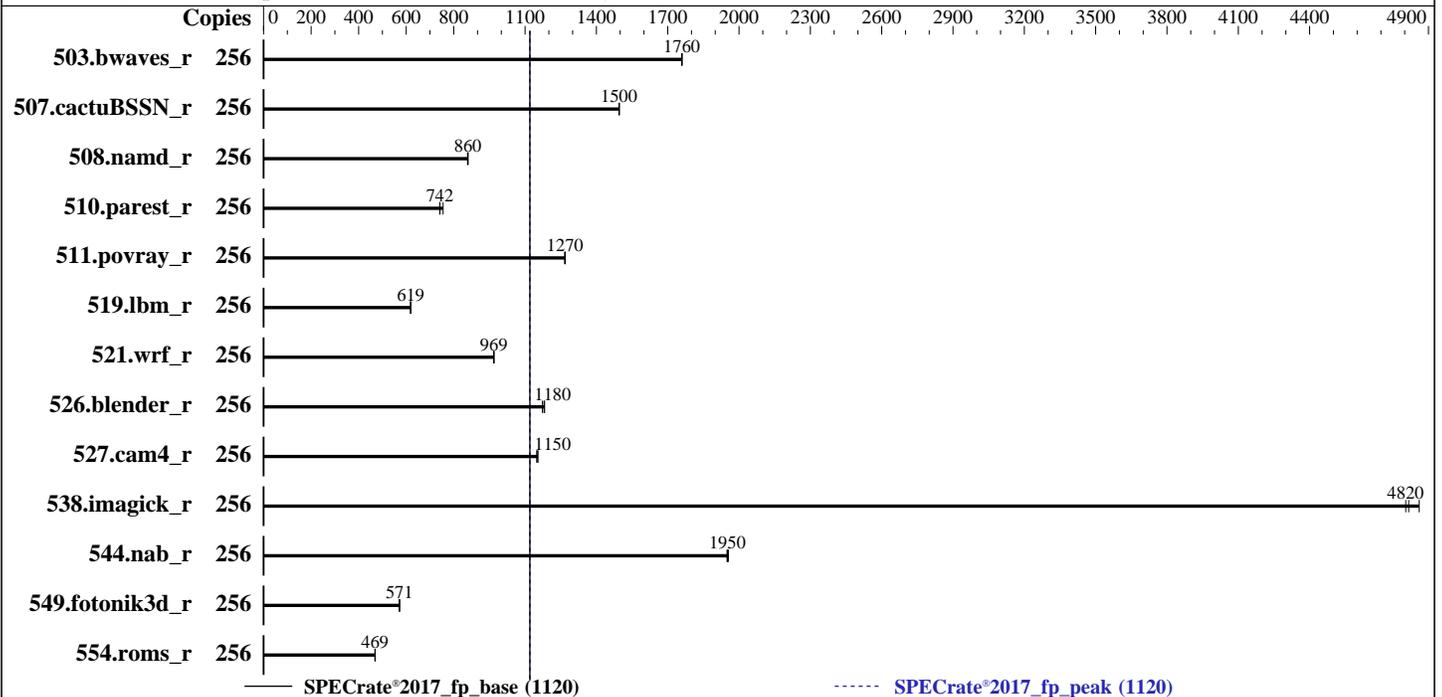

Hardware

CPU Name: AMD EPYC 9534
 Max MHz: 3700
 Nominal: 2450
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 01.09.0 released Jul-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	1459	1760	1460	1760	1458	1760	256	1459	1760	1460	1760	1458	1760
507.cactuBSSN_r	256	217	1500	217	1500	217	1500	256	217	1500	217	1500	217	1500
508.namd_r	256	283	860	283	860	283	858	256	283	860	283	860	283	858
510.parest_r	256	903	742	887	755	903	741	256	903	742	887	755	903	741
511.povray_r	256	471	1270	471	1270	472	1270	256	471	1270	471	1270	472	1270
519.lbm_r	256	437	618	436	619	436	619	256	437	618	436	619	436	619
521.wrf_r	256	592	969	592	968	592	969	256	592	969	592	968	592	969
526.blender_r	256	330	1180	331	1180	332	1170	256	330	1180	331	1180	332	1170
527.cam4_r	256	388	1150	390	1150	388	1150	256	388	1150	390	1150	388	1150
538.imagick_r	256	131	4860	133	4800	132	4820	256	131	4860	133	4800	132	4820
544.nab_r	256	220	1960	221	1950	221	1950	256	220	1960	221	1950	221	1950
549.fotonik3d_r	256	1743	573	1746	571	1746	571	256	1743	573	1746	571	1746	571
554.roms_r	256	867	469	867	469	867	469	256	867	469	867	469	867	469

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =
"/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib:/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
SVM Mode = disable
DRAM Scrub time = disable
NUMA nodes per socket = NPS4
Determinism Slider = Power
cTDP = 400
Package Power Limit = 400

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Aug 22 03:16:26 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Platform Notes (Continued)

- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
03:16:26 up 3:17, 2 users, load average: 164.96, 231.70, 243.29
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root      tty1     07Jan23  2:56m  1.84s  0.49s  /bin/bash ./amd_rate_aocc400_genoa_B1.sh
root      tty2     00:23   2:52m  0.01s  0.01s  -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3094476
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3094476
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.027/templots/preenv.fprate.027.0.log --lognum 027.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9534 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101139
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 64
siblings      : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9534 64-Core Processor
BIOS Model name:      AMD EPYC 9534 64-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3718.0659
CPU min MHz:           1500.0000
BogoMIPS:              4899.88
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                    constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                    pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                    popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                    abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                    perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                    invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                    avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                    svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                    pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Platform Notes (Continued)

umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

AMD-V

```

Virtualization:
L1d cache:      4 MiB (128 instances)
L1i cache:      4 MiB (128 instances)
L2 cache:       128 MiB (128 instances)
L3 cache:       512 MiB (16 instances)
NUMA node(s):   16
NUMA node0 CPU(s): 0-7,128-135
NUMA node1 CPU(s): 8-15,136-143
NUMA node2 CPU(s): 16-23,144-151
NUMA node3 CPU(s): 24-31,152-159
NUMA node4 CPU(s): 32-39,160-167
NUMA node5 CPU(s): 40-47,168-175
NUMA node6 CPU(s): 48-55,176-183
NUMA node7 CPU(s): 56-63,184-191
NUMA node8 CPU(s): 64-71,192-199
NUMA node9 CPU(s): 72-79,200-207
NUMA node10 CPU(s): 80-87,208-215
NUMA node11 CPU(s): 88-95,216-223
NUMA node12 CPU(s): 96-103,224-231
NUMA node13 CPU(s): 104-111,232-239
NUMA node14 CPU(s): 112-119,240-247
NUMA node15 CPU(s): 120-127,248-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-7,128-135
node 0 size: 48174 MB
node 0 free: 47349 MB
node 1 cpus: 8-15,136-143
node 1 size: 48377 MB
node 1 free: 47612 MB
node 2 cpus: 16-23,144-151
node 2 size: 48377 MB
node 2 free: 47440 MB
node 3 cpus: 24-31,152-159
node 3 size: 48377 MB
node 3 free: 47592 MB
node 4 cpus: 32-39,160-167
node 4 size: 48377 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120
SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 4 free: 47589 MB
node 5 cpus: 40-47,168-175
node 5 size: 48377 MB
node 5 free: 47594 MB
node 6 cpus: 48-55,176-183
node 6 size: 48340 MB
node 6 free: 47549 MB
node 7 cpus: 56-63,184-191
node 7 size: 48377 MB
node 7 free: 47605 MB
node 8 cpus: 64-71,192-199
node 8 size: 48377 MB
node 8 free: 47542 MB
node 9 cpus: 72-79,200-207
node 9 size: 48377 MB
node 9 free: 47577 MB
node 10 cpus: 80-87,208-215
node 10 size: 48377 MB
node 10 free: 47577 MB
node 11 cpus: 88-95,216-223
node 11 size: 48377 MB
node 11 free: 47589 MB
node 12 cpus: 96-103,224-231
node 12 size: 48377 MB
node 12 free: 47528 MB
node 13 cpus: 104-111,232-239
node 13 size: 48377 MB
node 13 free: 47493 MB
node 14 cpus: 112-119,240-247
node 14 size: 48377 MB
node 14 free: 47595 MB
node 15 cpus: 120-127,248-255
node 15 size: 48305 MB
node 15 free: 47530 MB

```

node distances:

```

node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 12 12 12 12 12 12 12 32 32 32 32 32 32 32
1:  11 10 12 12 12 12 12 12 12 32 32 32 32 32 32 32
2:  12 12 10 11 12 12 12 12 12 32 32 32 32 32 32 32
3:  12 12 11 10 12 12 12 12 12 32 32 32 32 32 32 32
4:  12 12 12 12 10 11 12 12 12 32 32 32 32 32 32 32
5:  12 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32
6:  12 12 12 12 12 12 12 10 11 32 32 32 32 32 32 32
7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10: 32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12
11: 32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12
12: 32 32 32 32 32 32 32 32 12 12 12 12 10 11 12 12
13: 32 32 32 32 32 32 32 32 12 12 12 12 11 10 12 12
14: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11
15: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 11 10

```

```

-----
9. /proc/meminfo
   MemTotal:      792293260 kB

```

```

-----
10. who -r
    run-level 3 Jan 7 20:25

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Platform Notes (Continued)

11. Systemd service manager version: systemd 250 (250-6.el9_0)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel00-root
ro
resume=/dev/mapper/rhel00-swap
rd.lvm.lv=rhel00/root
rd.lvm.lv=rhel00/swap
```

14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.45 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2450MHz
```

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120
SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

```
-----
19. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel00-home xfs      819G  16G  803G  2% /home
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:          Inspur
Product:         NF5468-A7-A0-R0-00
Product Family: Not specified
Serial:          000000000
```

```
-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     01.09.00
BIOS Date:        07/07/2023
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120
SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Compiler Version Notes (Continued)

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V3.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V3.0.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
N5468A7 (AMD EPYC 9534)

SPECrate®2017_fp_base = 1120

SPECrate®2017_fp_peak = 1120

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Nov-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-22 03:16:25-0400.

Report generated on 2023-09-13 14:50:05 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.