



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

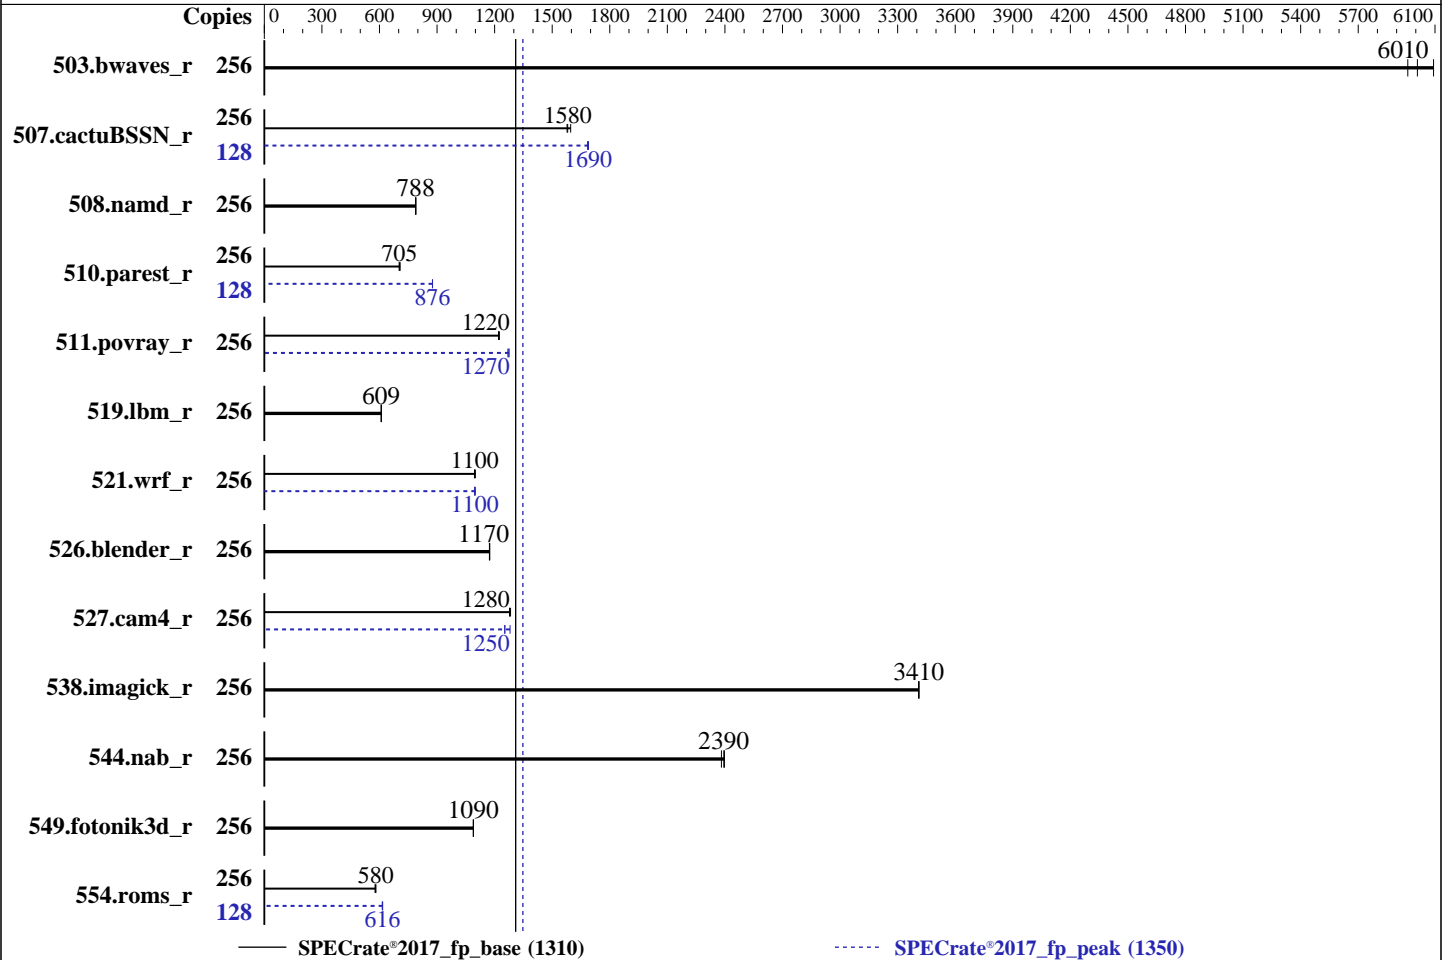

### Hardware

CPU Name: Intel Xeon Platinum 8454H  
 Max MHz: 3400  
 Nominal: 2100  
 Enabled: 128 cores, 4 chips, 2 threads/core  
 Orderable: 1,2,3,4 Chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 82.5 MB I+D on chip per chip  
 Other: None  
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1.9 TB SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 5.1.1e released May-2023  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	421	6090	431	5960	<u>427</u>	<u>6010</u>	256	421	6090	431	5960	<u>427</u>	<u>6010</u>
507.cactuBSSN_r	256	203	1600	<u>205</u>	<u>1580</u>	205	1580	128	95.9	1690	96.2	1680	<u>96.0</u>	<u>1690</u>
508.namd_r	256	308	790	<u>308</u>	<u>788</u>	309	788	256	308	790	<u>308</u>	<u>788</u>	309	788
510.parest_r	256	954	702	<u>950</u>	<u>705</u>	946	708	128	<u>382</u>	<u>876</u>	382	877	382	876
511.povray_r	256	490	1220	488	1220	<u>489</u>	<u>1220</u>	256	469	1270	471	1270	<u>469</u>	<u>1270</u>
519.lbm_r	256	443	609	443	609	<u>443</u>	<u>609</u>	256	443	609	443	609	<u>443</u>	<u>609</u>
521.wrf_r	256	524	1100	522	1100	<u>523</u>	<u>1100</u>	256	523	1100	522	1100	<u>523</u>	<u>1100</u>
526.blender_r	256	<u>332</u>	<u>1170</u>	332	1170	332	1170	256	<u>332</u>	<u>1170</u>	332	1170	332	1170
527.cam4_r	256	<u>350</u>	<u>1280</u>	350	1280	349	1280	256	358	1250	350	1280	<u>357</u>	<u>1250</u>
538.imagick_r	256	<u>187</u>	<u>3410</u>	187	3410	187	3410	256	<u>187</u>	<u>3410</u>	187	3410	187	3410
544.nab_r	256	<u>180</u>	<u>2390</u>	180	2400	181	2380	256	<u>180</u>	<u>2390</u>	180	2400	181	2380
549.fotonik3d_r	256	<u>916</u>	<u>1090</u>	916	1090	916	1090	256	<u>916</u>	<u>1090</u>	916	1090	916	1090
554.roms_r	256	700	581	705	577	<u>701</u>	<u>580</u>	128	330	616	<u>330</u>	<u>616</u>	331	614

SPECrate®2017\_fp\_base = **1310**

SPECrate®2017\_fp\_peak = **1350**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

cpupower frequency-set -g performance

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Adjacent Cache Line Prefetcher set to Enabled

DCU streamer Prefetch set to Enabled

Enhanced CPU Performance set to Auto

LLC Dead Line set to Disabled

ADDDC Sparing set to Disabled

Processor C6 Report set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sun Sep 17 08:57:51 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
2. w
   08:57:51 up 7:01, 1 user, load average: 117.41, 218.02, 240.92
USER  TTY      FROM          LOGIN@  IDLE   JCPU   PCPU WHAT
root  tty1    -             01:57   6:59m  1.49s  0.40s -bash
```

```
3. Username
   From environment variable $USER: root
```

```
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 8255277
   max locked memory      (kbytes, -l) 64
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size             (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes     (-u) 8255277
   virtual memory         (kbytes, -v) unlimited
   file locks             (-x) unlimited
```

```
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --action=build --action validate --define default-platform-flags --define numcopies=256 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
cores=128 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
fprate
runcpu --action build --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
cores=128 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.152/templogs/preenv.fprate.152.0.log --lognum 152.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Platinum 8454H
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 143
   stepping       : 8
   microcode      : 0x2b000461
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapsg
   cpu cores      : 32
   siblings       : 64
   4 physical ids (chips)
   256 processors (hardware threads)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

physical id 0: core ids 0-31  
physical id 1: core ids 0-31  
physical id 2: core ids 0-31  
physical id 3: core ids 0-31  
physical id 0: apicids 0-63  
physical id 1: apicids 128-191  
physical id 2: apicids 256-319  
physical id 3: apicids 384-447

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               256
On-line CPU(s) list:  0-255
Vendor ID:            GenuineIntel
Model name:           Intel(R) Xeon(R) Platinum 8454H
CPU family:           6
Model:                143
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):            4
Stepping:             8
CPU max MHz:          3400.0000
CPU min MHz:          800.0000
BogoMIPS:             4200.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                    tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                    avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                    arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                    ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                    tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                    amx_tile flush_l1d arch_capabilities

Virtualization:       VT-x
L1d cache:           6 MiB (128 instances)
L1i cache:           4 MiB (128 instances)
L2 cache:            256 MiB (128 instances)
L3 cache:            330 MiB (4 instances)
NUMA node(s):        16
NUMA node0 CPU(s):   0-7,128-135
NUMA node1 CPU(s):   8-15,136-143
NUMA node2 CPU(s):   16-23,144-151
NUMA node3 CPU(s):   24-31,152-159
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Sep-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

NUMA node4 CPU(s):          32-39,160-167
NUMA node5 CPU(s):          40-47,168-175
NUMA node6 CPU(s):          48-55,176-183
NUMA node7 CPU(s):          56-63,184-191
NUMA node8 CPU(s):          64-71,192-199
NUMA node9 CPU(s):          72-79,200-207
NUMA node10 CPU(s):         80-87,208-215
NUMA node11 CPU(s):         88-95,216-223
NUMA node12 CPU(s):         96-103,224-231
NUMA node13 CPU(s):        104-111,232-239
NUMA node14 CPU(s):        112-119,240-247
NUMA node15 CPU(s):        120-127,248-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	82.5M	330M	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-7,128-135
node 0 size: 128663 MB
node 0 free: 127409 MB
node 1 cpus: 8-15,136-143
node 1 size: 129019 MB
node 1 free: 128291 MB
node 2 cpus: 16-23,144-151
node 2 size: 129019 MB
node 2 free: 128275 MB
node 3 cpus: 24-31,152-159
node 3 size: 129019 MB
node 3 free: 128216 MB
node 4 cpus: 32-39,160-167
node 4 size: 128985 MB
node 4 free: 128178 MB
node 5 cpus: 40-47,168-175
node 5 size: 129019 MB
node 5 free: 128251 MB
node 6 cpus: 48-55,176-183
node 6 size: 129019 MB
node 6 free: 127968 MB
node 7 cpus: 56-63,184-191
node 7 size: 129019 MB
node 7 free: 128048 MB
node 8 cpus: 64-71,192-199
node 8 size: 129019 MB
node 8 free: 128254 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

node 9 cpus: 72-79,200-207
node 9 size: 129019 MB
node 9 free: 128260 MB
node 10 cpus: 80-87,208-215
node 10 size: 129019 MB
node 10 free: 128258 MB
node 11 cpus: 88-95,216-223
node 11 size: 129019 MB
node 11 free: 128263 MB
node 12 cpus: 96-103,224-231
node 12 size: 129019 MB
node 12 free: 128265 MB
node 13 cpus: 104-111,232-239
node 13 size: 129019 MB
node 13 free: 128272 MB
node 14 cpus: 112-119,240-247
node 14 size: 129019 MB
node 14 free: 128263 MB
node 15 cpus: 120-127,248-255
node 15 size: 128936 MB
node 15 free: 128194 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
1:  12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
2:  12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
3:  12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
4:  21 21 21 21 10 12 12 12 12 21 21 21 21 21 21 21
5:  21 21 21 21 12 10 12 12 12 21 21 21 21 21 21 21
6:  21 21 21 21 12 12 10 12 12 21 21 21 21 21 21 21
7:  21 21 21 21 12 12 12 10 21 21 21 21 21 21 21 21
8:  21 21 21 21 21 12 12 10 12 12 12 12 12 21 21 21
9:  21 21 21 21 21 21 21 21 12 10 12 12 12 21 21 21
10: 21 21 21 21 21 21 21 21 12 12 10 12 12 21 21 21
11: 21 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21
12: 21 21 21 21 21 21 21 21 12 12 10 21 10 12 12 12
13: 21 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12
14: 21 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12
15: 21 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10

```

```

9. /proc/meminfo
MemTotal:      2113375268 kB

```

```

10. who -r
run-level 3 Sep 17 01:57

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target  Status
multi-user      running

```

```

12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
           issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
           smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

disabled      autofsd autofast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
               chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
               firewallld gpm grub2-once haveged-switch-root ipmi ipmievdev issue-add-ssh-keys kexec-load
               ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck
               rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve
               systemd-boot-check-no-failures systemd-network-generator systemd-sysext
               systemd-time-wait-sync systemd-timesyncd udisks2

indirect      wickedd

```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=e21e8d67-b30a-4ea7-8055-b0885f263ec2
splash=silent
mitigations=auto
quiet
security=apparmor

```

-----  
14. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

-----  
15. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes              0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio              20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness                1
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        0

```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```

defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs 222G  13G  208G   6% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:         Cisco Systems Inc
Product:        UCSX-410C-M7
Serial:         FCH264873NP

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  4x 0xAD00 HMC94MEBRA121N 64 GB 2 rank 4800
 28x 0xAD00 HMC94MEBRA123N 64 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:         Cisco Systems, Inc.
BIOS Version:        X410M7.5.1.1e.0.0524232049
BIOS Date:           05/24/2023
BIOS Revision:       5.29

```

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```

```

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

-----  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

-----  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

-----  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

-----  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Sep-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1) -flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X410c M7 (Intel Xeon Platinum 8454H, 2.10GHz)

SPECrate®2017\_fp\_base = 1310

SPECrate®2017\_fp\_peak = 1350

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Sep-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revM.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-17 08:57:50-0400.

Report generated on 2023-11-21 20:29:30 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.