



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

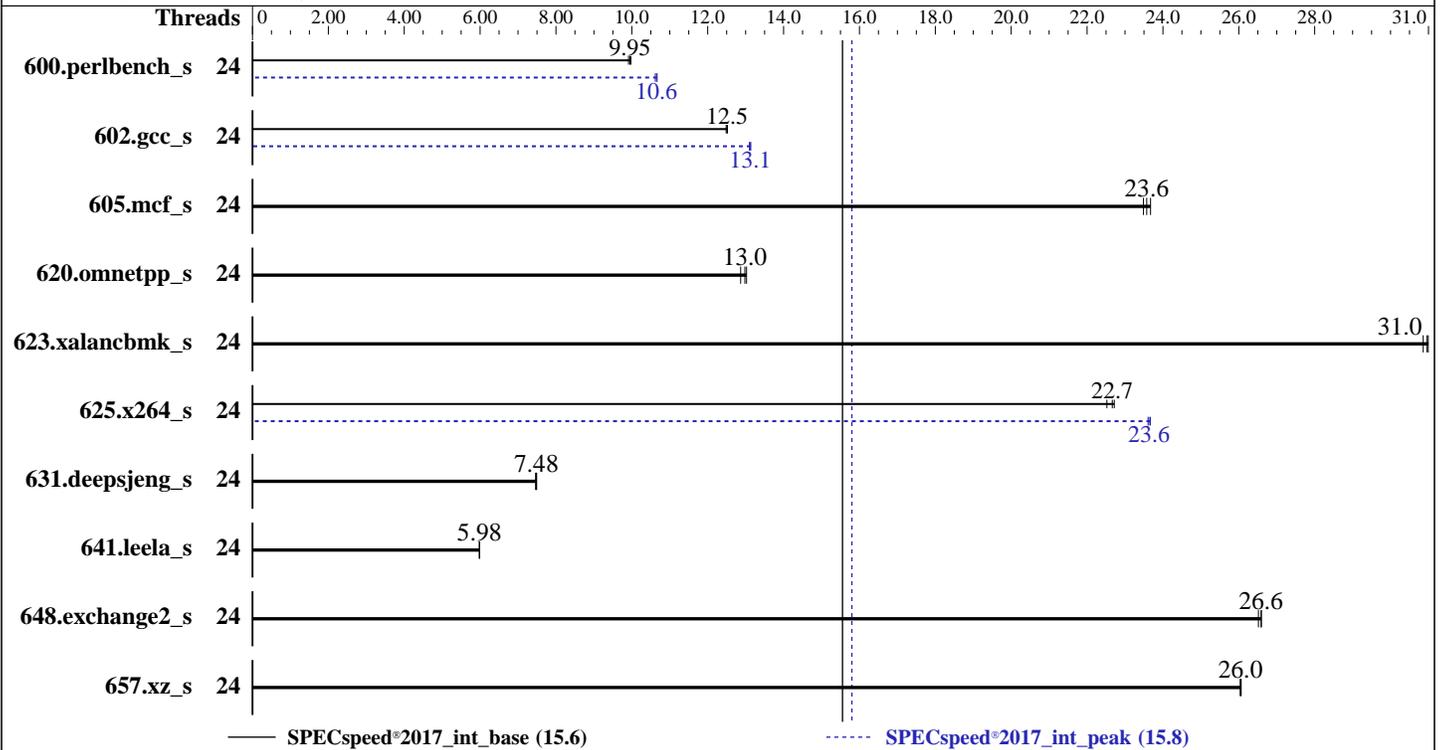

Hardware

CPU Name: Intel Xeon Gold 6444Y
 Max MHz: 4000
 Nominal: 3600
 Enabled: 24 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 03.01.00 released Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	179	9.91	178	9.98	178	9.95	24	166	10.7	167	10.6	167	10.6
602.gcc_s	24	319	12.5	318	12.5	318	12.5	24	304	13.1	303	13.1	304	13.1
605.mcf_s	24	199	23.7	201	23.5	200	23.6	24	199	23.7	201	23.5	200	23.6
620.omnetpp_s	24	126	13.0	125	13.0	127	12.9	24	126	13.0	125	13.0	127	12.9
623.xalancbmk_s	24	45.7	31.0	45.8	31.0	45.9	30.9	24	45.7	31.0	45.8	31.0	45.9	30.9
625.x264_s	24	78.3	22.5	77.8	22.7	77.7	22.7	24	74.6	23.6	74.5	23.7	74.7	23.6
631.deepsjeng_s	24	191	7.49	192	7.46	191	7.48	24	191	7.49	192	7.46	191	7.48
641.leela_s	24	285	5.98	285	5.98	285	5.98	24	285	5.98	285	5.98	285	5.98
648.exchange2_s	24	111	26.6	111	26.6	111	26.5	24	111	26.6	111	26.6	111	26.5
657.xz_s	24	237	26.0	237	26.0	237	26.1	24	237	26.0	237	26.0	237	26.1

SPECspeed®2017_int_base = **15.6**

SPECspeed®2017_int_peak = **15.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

General Notes (Continued)

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to disable
Hyper Threading set to disable
Active cores set to 12

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Sep 27 19:32:59 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
- -----

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```
1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux
```

```
-----
2. w
19:32:59 up 2 min, 1 user, load average: 0.30, 0.32, 0.14
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root      tty1    19:31   11.00s 0.76s  0.00s  sh
reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 2062384
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes          (-u) 2062384
virtual memory              (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=24 --tune base,peak -o all --define
intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=24 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6444Y
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 7
microcode       : 0x2b000130
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores      : 12
siblings       : 12
2 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-10,15
physical id 1: core ids 0-10,15
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,30
physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,158

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                24
On-line CPU(s) list:   0-23
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6444Y
BIOS Model name:      Intel(R) Xeon(R) Gold 6444Y
CPU family:            6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    12
Socket(s):             2
Stepping:              7
CPU max MHz:           4000.0000
CPU min MHz:           800.0000
BogoMIPS:              7200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bml avx2
                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             1.1 MiB (24 instances)
L1i cache:             768 KiB (24 instances)
L2 cache:              48 MiB (24 instances)
L3 cache:              90 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-11

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node1 CPU(s):          12-23
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-11
node 0 size: 257638 MB
node 0 free: 256836 MB
node 1 cpus: 12-23
node 1 size: 257997 MB
node 1 free: 257532 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

9. /proc/meminfo

MemTotal: 528011276 kB

10. who -r

run-level 3 Sep 27 19:30

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled dbus-broker getty@ tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd
blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond
debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update
mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdb-rebuild
rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd
systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

15. tuned-adm active
Current active profile: throughput-performance

```

```

16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

20. Disk information

SPEC is set to: /home/CPU2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 209G 611G 26% /home

21. /sys/devices/virtual/dmi/id

Vendor: IEI
Product: NF5280M7
Product Family: Not specified
Serial: 000000000

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 03.01.00
BIOS Date: 12/29/2022

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017_int_base = 15.6

NF5280M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017_int_peak = 15.8

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Sep-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-27 19:32:59-0400.

Report generated on 2024-01-29 18:12:09 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.