



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**

**SPECSpeed®2017\_fp\_base = 276**

**NF5180M7 (Intel Xeon Gold 6444Y)**

**SPECSpeed®2017\_fp\_peak = 276**

**CPU2017 License:** 3358


**Test Date:** Oct-2023

**Test Sponsor:** IEIT Systems Co., Ltd.

**Hardware Availability:** Apr-2023

**Tested by:** IEIT Systems Co., Ltd.

**Software Availability:** Dec-2022

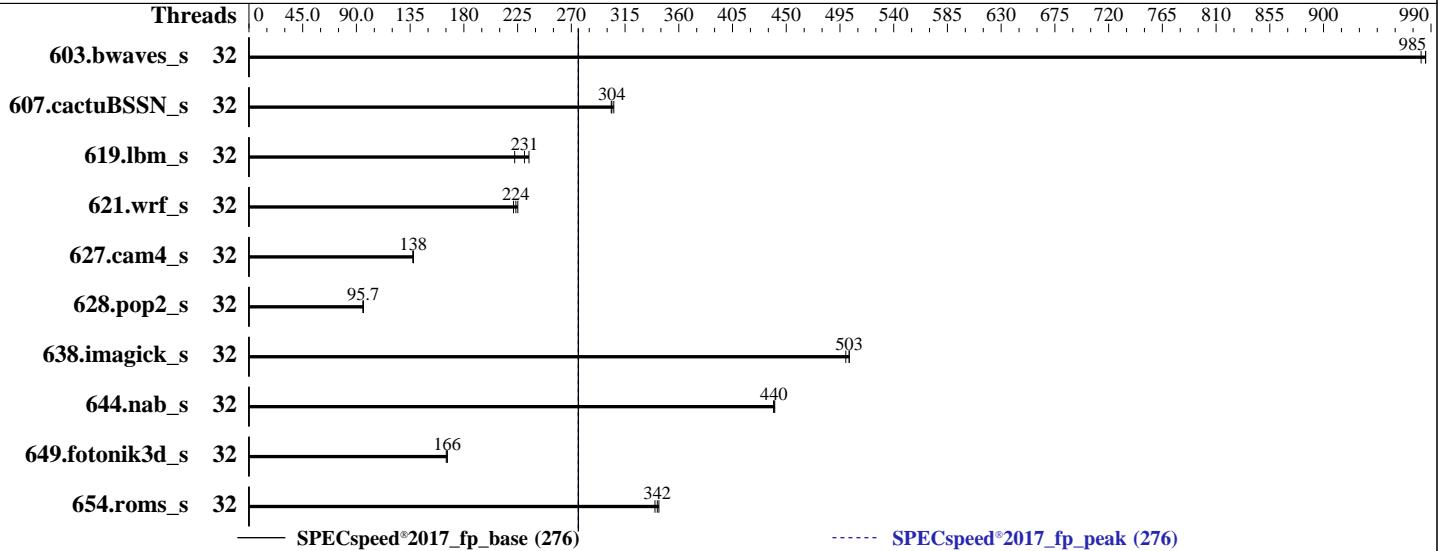

## Hardware

CPU Name: Intel Xeon Gold 6444Y  
 Max MHz: 4000  
 Nominal: 3600  
 Enabled: 32 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 45 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1 TB NVME SSD  
 Other: None

OS:

Red Hat Enterprise Linux 9.0 (Plow)

Compiler:

5.14.0-70.22.1.el9\_0.x86\_64

Parallel:

C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;

Firmware:

Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

File System:

Yes

System State:

Version 03.01.00 released Dec-2022

Base Pointers:

xfs

Peak Pointers:

Run level 3 (multi-user)

Other:

64-bit

Power Management: jemalloc memory allocator V5.0.1

64-bit

BIOS and OS set to prefer performance at the cost of additional power usage.

## Software



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECSpeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	<b>59.9</b>	<b>985</b>	59.9	985	60.1	982	32	<b>59.9</b>	<b>985</b>	59.9	985	60.1	982
607.cactuBSSN_s	32	54.6	306	54.9	303	<b>54.8</b>	<b>304</b>	32	54.6	306	54.9	303	<b>54.8</b>	<b>304</b>
619.lbm_s	32	23.5	223	<b>22.7</b>	<b>231</b>	22.3	235	32	23.5	223	<b>22.7</b>	<b>231</b>	22.3	235
621.wrf_s	32	<b>59.2</b>	<b>224</b>	59.7	222	58.7	225	32	<b>59.2</b>	<b>224</b>	59.7	222	58.7	225
627.cam4_s	32	<b>64.4</b>	<b>138</b>	64.6	137	64.3	138	32	<b>64.4</b>	<b>138</b>	64.6	137	64.3	138
628.pop2_s	32	124	95.9	124	95.5	<b>124</b>	<b>95.7</b>	32	124	95.9	124	95.5	<b>124</b>	<b>95.7</b>
638.imagick_s	32	28.9	500	28.7	503	<b>28.7</b>	<b>503</b>	32	28.9	500	28.7	503	<b>28.7</b>	<b>503</b>
644.nab_s	32	<b>39.7</b>	<b>440</b>	39.7	440	39.8	439	32	<b>39.7</b>	<b>440</b>	39.7	440	39.8	439
649.fotonik3d_s	32	<b>54.9</b>	<b>166</b>	55.2	165	54.9	166	32	<b>54.9</b>	<b>166</b>	55.2	165	54.9	166
654.roms_s	32	<b>46.0</b>	<b>342</b>	45.9	343	46.3	340	32	<b>46.0</b>	<b>342</b>	45.9	343	46.3	340
SPECSpeed®2017_fp_base = 276							SPECSpeed®2017_fp_peak = 276							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Platform Notes

BIOS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to disable

Hyper Threading set to disable

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sat Oct  7 12:30:45 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 250 (250-6.el9\_0)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

1. uname -a  
Linux localhost 5.14.0-70.22.1.el9\_0.x86\_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86\_64 x86\_64 x86\_64  
GNU/Linux

2. w  
12:30:45 up 0 min, 2 users, load average: 2.85, 1.15, 0.42  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 12:30 11.00s 0.73s 0.00s sh  
reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh  
root tty2 12:30 3.00s 0.00s 0.00s -bash

3. Username  
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECSpeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062281
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062281
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

---

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak -o all --define
  drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=32 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.003/templogs/preenv.fpspeed.003.0.log --lognum 003.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

---

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6444Y
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 7
microcode       : 0x2b000130
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 16
siblings         : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

---

### 7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**

**SPECspeed®2017\_fp\_base = 276**

**NF5180M7 (Intel Xeon Gold 6444Y)**

**SPECspeed®2017\_fp\_peak = 276**

**CPU2017 License:** 3358

**Test Date:** Oct-2023

**Test Sponsor:** IEIT Systems Co., Ltd.

**Hardware Availability:** Apr-2023

**Tested by:** IEIT Systems Co., Ltd.

**Software Availability:** Dec-2022

## Platform Notes (Continued)

```

CPU op-mode(s):           32-bit, 64-bit
Address sizes:            52 bits physical, 57 bits virtual
Byte Order:               Little Endian
CPU(s):                  32
On-line CPU(s) list:     0-31
Vendor ID:                GenuineIntel
BIOS Vendor ID:          Intel(R) Corporation
Model name:               Intel(R) Xeon(R) Gold 6444Y
BIOS Model name:          Intel(R) Xeon(R) Gold 6444Y
CPU family:               6
Model:                   143
Thread(s) per core:      1
Core(s) per socket:       16
Socket(s):                2
Stepping:                 7
CPU max MHz:              4000.0000
CPU min MHz:              800.0000
BogoMIPS:                 7200.00
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                           clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
                           nonstop_tsc tsc art tsc_known_freq pn1 pclmulqdq dtes64 monitor
                           ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrpr pdcm pcid dca sse4_1
                           sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                           lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                           invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
                           tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2
                           smep bmil erms invpcid cqmm rdt_a avx512f avx512dq rdseed adx smap
                           avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                           xsaveopt xsavec xgetbv1 xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total
                           cqmm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                           arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbm1 umip pku
                           ospke waitpkg avx512_vbm1 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                           tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                           enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
                           amx_tile flush_l1d arch_capabilities

Virtualization:           VT-x
L1d cache:                1.5 MiB (32 instances)
L1i cache:                1 MiB (32 instances)
L2 cache:                 64 MiB (32 instances)
L3 cache:                 90 MiB (2 instances)
NUMA node(s):              2
NUMA node0 CPU(s):        0-15
NUMA node1 CPU(s):        16-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	45M	90M	15	Unified	3	49152	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Platform Notes (Continued)

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-15
node 0 size: 257576 MB
node 0 free: 256673 MB
node 1 cpus: 16-31
node 1 size: 258033 MB
node 1 free: 257554 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10
```

```
9. /proc/meminfo
MemTotal:      527984924 kB
```

```
10. who -r
run-level 3 Oct  7 12:29
```

```
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target  Status
multi-user      running
```

```
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        dbus-broker getty@ tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled       NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd
                blk-availability canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond
                debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update
                mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmdcertd rpmdb-rebuild
                rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd
                systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

```
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECSpeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Platform Notes (Continued)

Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----  
20. Disk information  
SPEC is set to: /home/CPU2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 819G 209G 611G 26% /home

-----  
21. /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECSpeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Platform Notes (Continued)

Vendor: IEI  
Product: NF5180M7  
Product Family: Not specified  
Serial: 00000000

-----  
22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 03.01.00  
BIOS Date: 12/29/2022

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 607.cactusBSSN\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECSpeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECspeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 276

NF5180M7 (Intel Xeon Gold 6444Y)

SPECSpeed®2017\_fp\_peak = 276

CPU2017 License: 3358

Test Date: Oct-2023

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Apr-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-07 12:30:45-0400.

Report generated on 2023-10-25 10:35:23 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.