



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_base = 417

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2023
Hardware Availability: Oct-2023
Software Availability: Nov-2022

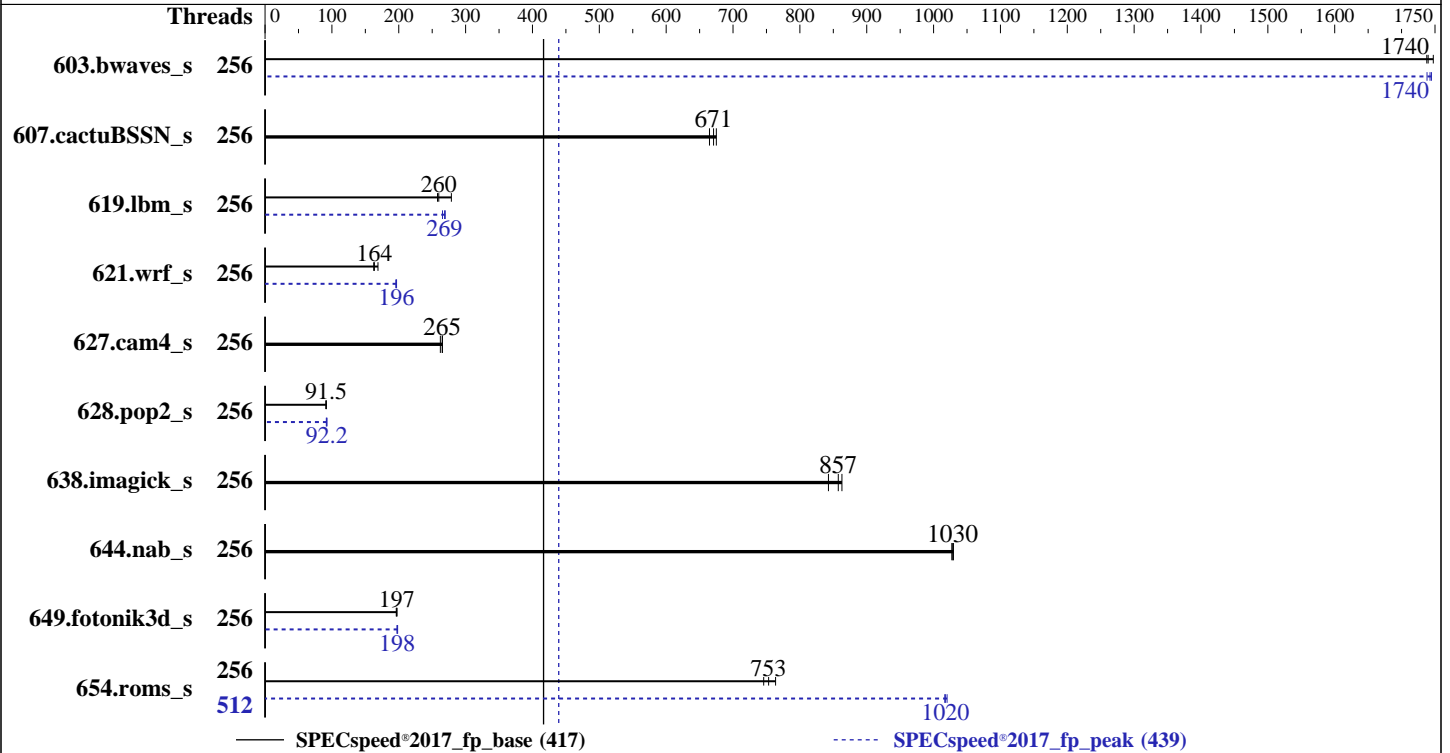

Hardware

CPU Name: AMD EPYC 9754
 Max MHz: 3100
 Nominal: 2250
 Enabled: 256 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 8 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 3.84 TB NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version QGE115H 3.10 released Sep-2023
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_base = 417

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2023

Hardware Availability: Oct-2023

Software Availability: Nov-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	256	34.0	1740	33.8	1750	<u>33.9</u>	<u>1740</u>	256	33.9	1740	33.8	1740	<u>33.9</u>	<u>1740</u>
607.cactuBSSN_s	256	24.7	675	25.1	665	<u>24.8</u>	<u>671</u>	256	24.7	675	25.1	665	<u>24.8</u>	<u>671</u>
619.lbm_s	256	<u>20.2</u>	<u>260</u>	20.3	258	18.8	279	256	<u>19.5</u>	<u>269</u>	19.4	269	19.7	265
621.wrf_s	256	81.4	163	<u>80.9</u>	<u>164</u>	78.3	169	256	67.6	196	67.2	197	<u>67.3</u>	<u>196</u>
627.cam4_s	256	<u>33.4</u>	<u>265</u>	33.8	262	33.4	265	256	<u>33.4</u>	<u>265</u>	33.8	262	33.4	265
628.pop2_s	256	130	91.0	130	91.5	<u>130</u>	<u>91.5</u>	256	<u>129</u>	<u>92.2</u>	128	92.6	130	91.6
638.imagick_s	256	<u>16.8</u>	<u>857</u>	17.1	843	16.7	863	256	<u>16.8</u>	<u>857</u>	17.1	843	16.7	863
644.nab_s	256	<u>17.0</u>	<u>1030</u>	17.0	1030	17.0	1030	256	<u>17.0</u>	<u>1030</u>	17.0	1030	17.0	1030
649.fotonik3d_s	256	<u>46.3</u>	<u>197</u>	46.2	197	46.4	196	256	46.2	197	<u>46.1</u>	<u>198</u>	46.0	198
654.roms_s	256	21.1	746	<u>20.9</u>	<u>753</u>	20.6	764	512	15.4	1020	15.5	1020	<u>15.5</u>	<u>1020</u>

SPECspeed®2017_fp_base = 417

SPECspeed®2017_fp_peak = 439

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To disable THP for peak runs of 621.wrf_s:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 417

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2023
Hardware Availability: Oct-2023
Software Availability: Nov-2022

Operating System Notes (Continued)

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-511"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "512"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:

```
GOMP_CPU_AFFINITY = "0-255"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-255"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-255"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-255"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY = "0-255"
PGHMF_ZMEM = "yes"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0 256 1 257 2 258 3 259 4 260 5 261 6 262 7 263 8 264 9 265 10 266 11 267 12 268 13
269 14 270 15 271 16 272 17 273 18 274 19 275 20 276 21 277 22 278 23 279 24 280 25 281 26 282 27 283
28 284 29 285 30 286 31 287 32 288 33 289 34 290 35 291 36 292 37 293 38 294 39 295 40 296 41 297 42
298 43 299 44 300 45 301 46 302 47 303 48 304 49 305 50 306 51 307 52 308 53 309 54 310 55 311 56 312
57 313 58 314 59 315 60 316 61 317 62 318 63 319 64 320 65 321 66 322 67 323 68 324 69 325 70 326 71
327 72 328 73 329 74 330 75 331 76 332 77 333 78 334 79 335 80 336 81 337 82 338 83 339 84 340 85 341
86 342 87 343 88 344 89 345 90 346 91 347 92 348 93 349 94 350 95 351 96 352 97 353 98 354 99 355 100
356 101 357 102 358 103 359 104 360 105 361 106 362 107 363 108 364 109 365 110 366 111 367 112 368
113 369 114 370 115 371 116 372 117 373 118 374 119 375 120 376 121 377 122 378 123 379 124 380 125
381 126 382 127 383 128 384 129 385 130 386 131 387 132 388 133 389 134 390 135 391 136 392 137 393
138 394 139 395 140 396 141 397 142 398 143 399 144 400 145 401 146 402 147 403 148 404 149 405 150
406 151 407 152 408 153 409 154 410 155 411 156 412 157 413 158 414 159 415 160 416 161 417 162 418
163 419 164 420 165 421 166 422 167 423 168 424 169 425 170 426 171 427 172 428 173 429 174 430 175
431 176 432 177 433 178 434 179 435 180 436 181 437 182 438 183 439 184 440 185 441 186 442 187 443
188 444 189 445 190 446 191 447 192 448 193 449 194 450 195 196 452 197 453 198 454 199 455 200
456 201 457 202 458 203 459 204 460 205 461 206 462 207 463 208 464 209 465 210 466 211 467 212 468
213 469 214 470 215 471 216 472 217 473 218 474 219 475 220 476 221 477 222 478 223 479 224 480 225
481 226 482 227 483 228 484 229 485 230 486 231 487 232 488 233 489 234 490 235 491 236 492 237 493
238 494 239 495 240 496 241 497 242 498 243 499 244 500 245 501 246 502 247 503 248 504 249 505 250
506 251 507 252 508 253 509 254 510 255 511"
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_base = 417

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2023
Hardware Availability: Oct-2023
Software Availability: Nov-2022

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

- NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Sep 27 16:09:09 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
16:09:09 up 2 min, 1 user, load average: 2.23, 0.68, 0.24
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 29Apr22 515days 1.42s 0.13s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_base = 417

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2023
Hardware Availability: Oct-2023
Software Availability: Nov-2022

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 3093954
max locked memory      (kbytes, -l) 2097152
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes     (-u) 3093954
virtual memory         (kbytes, -v) unlimited
file locks            (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.036/templogs/preenv.fpspeed.036.0.log --lognum 036.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa00211
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 128
siblings       : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_base = 417

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2023
Hardware Availability: Oct-2023
Software Availability: Nov-2022

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 512
On-line CPU(s) list:   0-511
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9754 128-Core Processor
CPU family:             25
Model:                  160
Thread(s) per core:    2
Core(s) per socket:    128
Socket(s):              2
Stepping:               2
Frequency boost:        enabled
CPU max MHz:            3100.3411
CPU min MHz:            1500.0000
BogoMIPS:               4493.21
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsavec cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization:        AMD-V
L1d cache:             8 MiB (256 instances)
L1i cache:             8 MiB (256 instances)
L2 cache:              256 MiB (256 instances)
L3 cache:              512 MiB (32 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-127,256-383
NUMA node1 CPU(s):    128-255,384-511
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                        filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 417

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017

Test Date: Sep-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

L1i	32K	8M	8 Instruction	1	64	1	64
L2	1M	256M	8 Unified	2	2048	1	64
L3	16M	512M	16 Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-127,256-383
node 0 size: 386747 MB
node 0 free: 384723 MB
node 1 cpus: 128-255,384-511
node 1 size: 386765 MB
node 1 free: 385944 MB
node distances:
node  0  1
  0: 10 32
  1: 32 10
```

9. /proc/meminfo

MemTotal: 792077692 kB

10. who -r

run-level 3 Apr 29 20:01

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix
purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap ntp-wait
ntpd nvme-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=57007a51-1b8d-4733-95f6-d7d0c84f41c9
splash=silent
quiet
security=apparmor
mitigations=auto
```

14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_base = 417

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2023

Hardware Availability: Oct-2023

Software Availability: Nov-2022

Platform Notes (Continued)

analyzing CPU 0:

current policy: frequency should be within 1.50 GHz and 2.25 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 btrfs 3.5T 186G 3.4T 6% /home
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 417

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017

Test Date: Sep-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

Vendor: Lenovo
Product: ThinkSystem SR675 V3 System Board
Product Family: ThinkSystem
Serial: None

21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800
10x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
7x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
6x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: QGE115H-3.10
BIOS Date: 09/07/2023
BIOS Revision: 3.10
Firmware Revision: 3.10

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 417

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2023
Hardware Availability: Oct-2023
Software Availability: Nov-2022

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECSpeed®2017_fp_base = 417

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECSpeed®2017_fp_peak = 439

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2023

Hardware Availability: Oct-2023

Software Availability: Nov-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_base = 417

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2023

Hardware Availability: Oct-2023

Software Availability: Nov-2022

Base Other Flags

C benchmarks:

`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:

`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:

`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:

`-Wno-return-type -Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:

`clang`

Fortran benchmarks:

`flang`

Benchmarks using both Fortran and C:

`flang clang`

Benchmarks using Fortran, C, and C++:

`clang++ clang flang`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000`

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 417

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017

Test Date: Sep-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

619.lbm_s (continued):

```
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

627.cam4_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 417

ThinkSystem SR675 V3
(2.25 GHz,AMD EPYC 9754)

SPECspeed®2017_fp_peak = 439

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2023

Hardware Availability: Oct-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

628.pop2_s (continued):

```
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-Mrecursive -fvector-transform -fscalar-transform  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-27 04:09:08-0400.

Report generated on 2023-10-25 10:37:33 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-24.