



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.8

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2023

Tested by: Lenovo Global Technology

Software Availability: May-2023

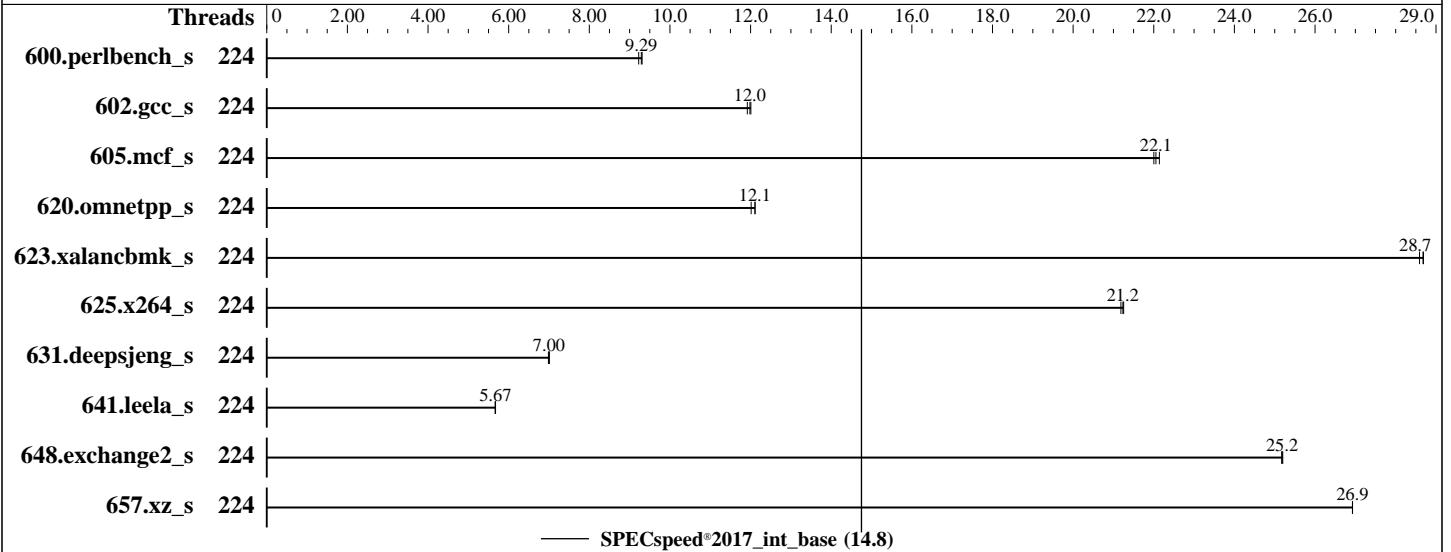

Hardware

CPU Name: Intel Xeon Platinum 8480CL
 Max MHz: 3800
 Nominal: 2000
 Enabled: 112 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.2 (Plow) (x86_64)
 Kernel 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version ESE117F 2.22 released Aug-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Nov-2023
Software Availability: May-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	224	191	9.31	192	9.22	<u>191</u>	<u>9.29</u>							
602.gcc_s	224	332	12.0	334	11.9	<u>332</u>	<u>12.0</u>							
605.mcf_s	224	213	22.1	215	22.0	<u>214</u>	<u>22.1</u>							
620.omnetpp_s	224	136	12.0	<u>135</u>	<u>12.1</u>	135	12.1							
623.xalancbmk_s	224	49.4	28.7	49.6	28.6	49.4	28.7							
625.x264_s	224	83.1	21.2	83.3	21.2	83.0	21.3							
631.deepsjeng_s	224	205	6.99	204	7.01	<u>205</u>	<u>7.00</u>							
641.leela_s	224	301	5.66	301	5.67	<u>301</u>	<u>5.67</u>							
648.exchange2_s	224	117	25.2	117	25.2	<u>117</u>	<u>25.2</u>							
657.xz_s	224	230	26.9	230	26.9	<u>230</u>	<u>26.9</u>							

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.0-2/lib/intel64:/home/cpu2017-1.1.9-ic2023.0-2/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: May-2023

General Notes (Continued)

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

SNC set to SNC2

Sysinfo program /home/cpu2017-1.1.9-ic2023.0-2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Tue Oct 10 02:17:53 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:17:53 up 4:17, 1 user, load average: 0.14, 0.04, 0.01
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Nov-2023
Software Availability: May-2023

Platform Notes (Continued)

USER	TTY	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	22:06	7.00s	1.74s	0.01s	-bash

3. Username
From environment variable \$USER: root

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062462
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062462
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=112 --tune base -o all --define
intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=112 --tune base --output_format all --define
intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base --size
refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.036/templogs/preenv.intspeed.036.0.log --lognum 036.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0-2
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8480CL
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b0004b1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 56
siblings       : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids 0-111
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.8

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2023

Tested by: Lenovo Global Technology

Software Availability: May-2023

Platform Notes (Continued)

physical id 1: apicids 128-239

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                224
On-line CPU(s) list:   0-223
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8480CL
BIOS Model name:      Intel(R) Xeon(R) Platinum 8480CL
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:   56
Socket(s):             2
Stepping:              7
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
L1d cache:             5.3 MiB (112 instances)
L1i cache:             3.5 MiB (112 instances)
L2 cache:              224 MiB (112 instances)
L3 cache:              210 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-27,112-139
NUMA node1 CPU(s):    28-55,140-167
NUMA node2 CPU(s):    56-83,168-195
NUMA node3 CPU(s):    84-111,196-223
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.8

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2023

Tested by: Lenovo Global Technology

Software Availability: May-2023

Platform Notes (Continued)

```

sequence
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-27,112-139
node 0 size: 128675 MB
node 0 free: 128077 MB
node 1 cpus: 28-55,140-167
node 1 size: 129011 MB
node 1 free: 128048 MB
node 2 cpus: 56-83,168-195
node 2 size: 128972 MB
node 2 free: 128545 MB
node 3 cpus: 84-111,196-223
node 3 size: 128997 MB
node 3 free: 128164 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 528033692 kB

10. who -r

run-level 3 Oct 9 22:01

11. Systemd service manager version: systemd 252 (252-13.el9_2)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth
                chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi
                iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor
                microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon
                selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
                tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled       arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell
                dnf-system-upgrade iprump iprprint iprupdate iscsid iscsiui kpatch kvm_stat ledmon

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.8

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2023

Tested by: Lenovo Global Technology

Software Availability: May-2023

Platform Notes (Continued)

```

indirect
man-db-restart-cache-update nftables nvme-autoconnect pesign psacct rdisc rhcd rhsm
rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. tuned-adm active
Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.8

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2023
Hardware Availability: Nov-2023
Software Availability: May-2023

Platform Notes (Continued)

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0-2
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 22G 797G 3% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial: 1234567890
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
8x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
8x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: ESE117F-2.22
BIOS Date: 08/29/2023
BIOS Revision: 2.22
Firmware Revision: 3.13
-----
```

Compiler Version Notes

```
=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
-----
```

```
=====
C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.8

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2023

Tested by: Lenovo Global Technology

Software Availability: May-2023

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8480CL)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: May-2023

Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-10 02:17:52-0400.
Report generated on 2024-01-29 18:13:56 by CPU2017 PDF formatter v6716.
Originally published on 2023-11-07.