



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050


Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

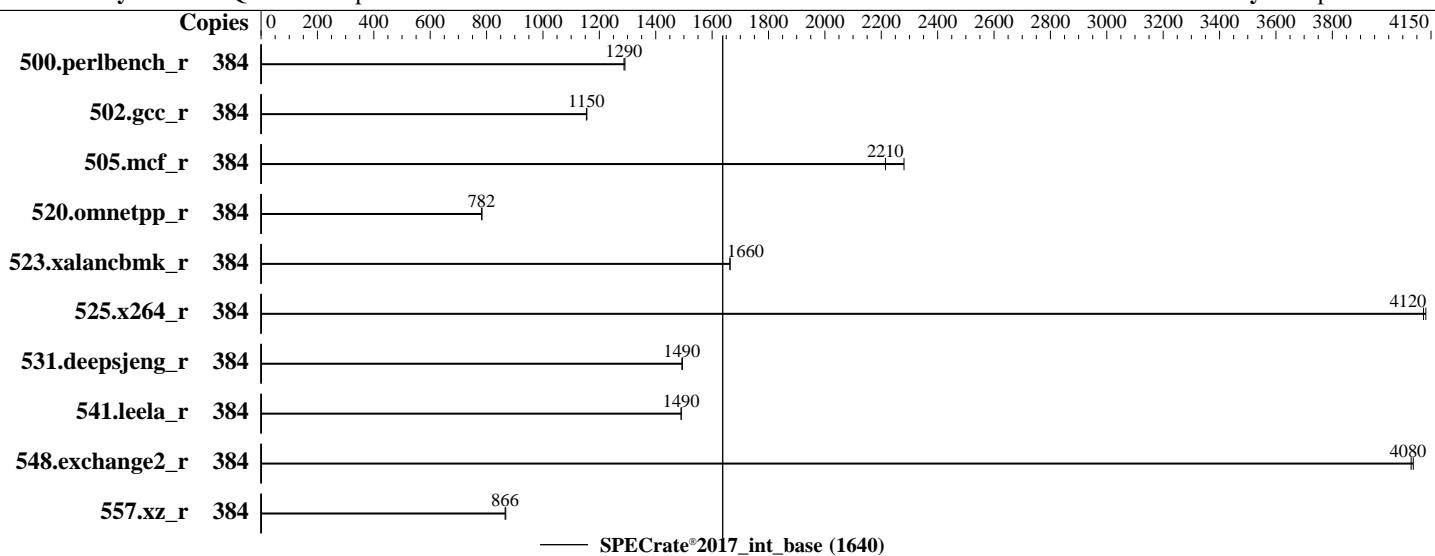

Hardware

CPU Name: AMD EPYC 9654
Max MHz: 3700
Nominal: 2400
Enabled: 192 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip,
32 MB shared / 8 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 3.84 TB NVMe SSD
Other: None

Software

OS: Ubuntu 22.04.2 LTS
Compiler: kernel version 5.15.0-84-generic
C/C++/Fortran: Version 4.0.0 of AOCC
Parallel: No
Firmware: Version 3A02 released Sep-2023
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|-----------------|--------|------------|-------------|------------|-------------|---------|-------|--------|---------|-------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 384 | 474 | 1290 | 475 | 1290 | | | | | | | | | | | |
| 502.gcc_r | 384 | 471 | 1150 | 470 | 1160 | | | | | | | | | | | |
| 505.mcf_r | 384 | 272 | 2280 | 280 | 2210 | | | | | | | | | | | |
| 520.omnetpp_r | 384 | 643 | 784 | 644 | 782 | | | | | | | | | | | |
| 523.xalancbmk_r | 384 | 244 | 1660 | 244 | 1660 | | | | | | | | | | | |
| 525.x264_r | 384 | 163 | 4120 | 163 | 4130 | | | | | | | | | | | |
| 531.deepsjeng_r | 384 | 295 | 1490 | 294 | 1490 | | | | | | | | | | | |
| 541.leela_r | 384 | 427 | 1490 | 427 | 1490 | | | | | | | | | | | |
| 548.exchange2_r | 384 | 246 | 4090 | 247 | 4080 | | | | | | | | | | | |
| 557.xz_r | 384 | 479 | 866 | 478 | 868 | | | | | | | | | | | |

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/root/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/root/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

```
ACPI CST C2 Latency set to 18
NUMA nodes per socket set to NPS4
Determinism Control is Manual
Determinism Slider set to Power
cTDP Control set to Manual
cTDP set to 400
PPT Control set to Manual
PPT set to 400
ACPI SRAT L3 Cache As NUMA Domain set to Enable
```

```
Sysinfo program /root/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on quanta Tue Oct 10 13:06:20 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent_hugepage
- 19. /sys/kernel/mm/transparent_hugepage/khugepaged

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Platform Notes (Continued)

20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux quanta 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
13:06:20 up 1 min, 1 user, load average: 0.42, 0.27, 0.10
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 13:05 1:40 1.38s 0.07s /bin/bash ./amd_rate_aocc400_znver4_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 6190285
nofiles 1024000
vmemory(kbytes) unlimited
locks unlimited
rtprio 0

5. sysinfo process ancestry
/sbin/init
/bin/login -f
-bash
/bin/bash ./test.sh
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 2 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 2 --nopower
--runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /root/cpu2017

6. /proc/cpuinfo
model name : AMD EPYC 9654 96-Core Processor
vendor_id : AuthenticAMD
cpu family : 25
model : 17
stepping : 1
microcode : 0xa10113e
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Platform Notes (Continued)

```
TLB size      : 3584 4K pages
cpu cores    : 96
siblings     : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

| | |
|----------------------|--|
| Architecture: | x86_64 |
| CPU op-mode(s): | 32-bit, 64-bit |
| Address sizes: | 46 bits physical, 57 bits virtual |
| Byte Order: | Little Endian |
| CPU(s): | 384 |
| On-line CPU(s) list: | 0-383 |
| Vendor ID: | AuthenticAMD |
| Model name: | AMD EPYC 9654 96-Core Processor |
| CPU family: | 25 |
| Model: | 17 |
| Thread(s) per core: | 2 |
| Core(s) per socket: | 96 |
| Socket(s): | 2 |
| Stepping: | 1 |
| Frequency boost: | enabled |
| CPU max MHz: | 3707.8120 |
| CPU min MHz: | 1500.0000 |
| BogoMIPS: | 4792.85 |
| Flags: | fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512fma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero iperf xsaveprtr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmlload vgif v_spec_ctrl avx512vmbi umip pku ospke avx512_vmbi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld sme sev sev_es |
| Virtualization: | AMD-V |
| L1d cache: | 6 MiB (192 instances) |
| L1i cache: | 6 MiB (192 instances) |
| L2 cache: | 192 MiB (192 instances) |
| L3 cache: | 768 MiB (24 instances) |
| NUMA node(s): | 24 |
| NUMA node0 CPU(s): | 0-7,192-199 |
| NUMA node1 CPU(s): | 8-15,200-207 |
| NUMA node2 CPU(s): | 16-23,208-215 |

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Date: Oct-2023

Test Sponsor: Quanta Computer Inc.

Hardware Availability: Nov-2023

Tested by: Quanta Computer Inc.

Software Availability: Sep-2023

Platform Notes (Continued)

| | |
|-------------------------------------|---|
| NUMA node3 CPU(s): | 24-31,216-223 |
| NUMA node4 CPU(s): | 32-39,224-231 |
| NUMA node5 CPU(s): | 40-47,232-239 |
| NUMA node6 CPU(s): | 48-55,240-247 |
| NUMA node7 CPU(s): | 56-63,248-255 |
| NUMA node8 CPU(s): | 64-71,256-263 |
| NUMA node9 CPU(s): | 72-79,264-271 |
| NUMA node10 CPU(s): | 80-87,272-279 |
| NUMA node11 CPU(s): | 88-95,280-287 |
| NUMA node12 CPU(s): | 96-103,288-295 |
| NUMA node13 CPU(s): | 104-111,296-303 |
| NUMA node14 CPU(s): | 112-119,304-311 |
| NUMA node15 CPU(s): | 120-127,312-319 |
| NUMA node16 CPU(s): | 128-135,320-327 |
| NUMA node17 CPU(s): | 136-143,328-335 |
| NUMA node18 CPU(s): | 144-151,336-343 |
| NUMA node19 CPU(s): | 152-159,344-351 |
| NUMA node20 CPU(s): | 160-167,352-359 |
| NUMA node21 CPU(s): | 168-175,360-367 |
| NUMA node22 CPU(s): | 176-183,368-375 |
| NUMA node23 CPU(s): | 184-191,376-383 |
| Vulnerability Gather data sampling: | Not affected |
| Vulnerability Itlb multihit: | Not affected |
| Vulnerability Llftf: | Not affected |
| Vulnerability Mds: | Not affected |
| Vulnerability Meltdown: | Not affected |
| Vulnerability Mmio stale data: | Not affected |
| Vulnerability Retbleed: | Not affected |
| Vulnerability Spec store bypass: | Mitigation; Speculative Store Bypass disabled via prctl and seccomp |
| Vulnerability Spectre v1: | Mitigation; usercopy/swapgs barriers and __user pointer sanitization |
| Vulnerability Spectre v2: | Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected |
| Vulnerability Srbds: | Not affected |
| Vulnerability Tsx async abort: | Not affected |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 32K | 6M | 8 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 6M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 192M | 8 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 32M | 768M | 16 | Unified | 3 | 32768 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 24 nodes (0-23)

node 0 cpus: 0-7,192-199

node 0 size: 64108 MB

node 0 free: 63454 MB

node 1 cpus: 8-15,200-207

node 1 size: 64507 MB

node 1 free: 64004 MB

node 2 cpus: 16-23,208-215

node 2 size: 64507 MB

node 2 free: 63881 MB

node 3 cpus: 24-31,216-223

node 3 size: 64460 MB

node 3 free: 64106 MB

node 4 cpus: 32-39,224-231

node 4 size: 64507 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Platform Notes (Continued)

```
node 4 free: 64150 MB
node 5 cpus: 40-47,232-239
node 5 size: 64507 MB
node 5 free: 64178 MB
node 6 cpus: 48-55,240-247
node 6 size: 64507 MB
node 6 free: 64198 MB
node 7 cpus: 56-63,248-255
node 7 size: 64507 MB
node 7 free: 64190 MB
node 8 cpus: 64-71,256-263
node 8 size: 64507 MB
node 8 free: 64152 MB
node 9 cpus: 72-79,264-271
node 9 size: 64507 MB
node 9 free: 64120 MB
node 10 cpus: 80-87,272-279
node 10 size: 64507 MB
node 10 free: 63881 MB
node 11 cpus: 88-95,280-287
node 11 size: 64507 MB
node 11 free: 64182 MB
node 12 cpus: 96-103,288-295
node 12 size: 64507 MB
node 12 free: 64270 MB
node 13 cpus: 104-111,296-303
node 13 size: 64507 MB
node 13 free: 64263 MB
node 14 cpus: 112-119,304-311
node 14 size: 64507 MB
node 14 free: 64271 MB
node 15 cpus: 120-127,312-319
node 15 size: 64507 MB
node 15 free: 64266 MB
node 16 cpus: 128-135,320-327
node 16 size: 64507 MB
node 16 free: 64251 MB
node 17 cpus: 136-143,328-335
node 17 size: 64507 MB
node 17 free: 64270 MB
node 18 cpus: 144-151,336-343
node 18 size: 64507 MB
node 18 free: 64253 MB
node 19 cpus: 152-159,344-351
node 19 size: 64507 MB
node 19 free: 64260 MB
node 20 cpus: 160-167,352-359
node 20 size: 64507 MB
node 20 free: 64272 MB
node 21 cpus: 168-175,360-367
node 21 size: 64507 MB
node 21 free: 64248 MB
node 22 cpus: 176-183,368-375
node 22 size: 64507 MB
node 22 free: 64263 MB
node 23 cpus: 184-191,376-383
node 23 size: 64447 MB
node 23 free: 64172 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Date: Oct-2023

Test Sponsor: Quanta Computer Inc.

Hardware Availability: Nov-2023

Tested by: Quanta Computer Inc.

Software Availability: Sep-2023

Platform Notes (Continued)

```

0: 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
1: 11 10 11 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
2: 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
3: 12 12 12 10 11 11 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
4: 12 12 12 11 10 11 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
5: 12 12 12 11 11 10 12 12 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 12 12 10 11 11 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 12 12 11 10 11 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
8: 12 12 12 12 12 12 11 11 10 12 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
9: 12 12 12 12 12 12 12 12 12 10 11 11 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 11 10 11 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 11 11 10 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
12: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 10 11 11 12 12 12 12 12 12 12 12 12 12
13: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 10 11 12 12 12 12 12 12 12 12 12 12
14: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 10 12 12 12 12 12 12 12 12 12 12
15: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 10 11 11 12 12 12 12 12 12
16: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 10 11 12 12 12 12 12 12
17: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 11 11 10 12 12 12 12 12 12
18: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 10 11 11 12 12 12
19: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11 10 11 12 12 12
20: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 11 11 10 12 12 12
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 12 10 11 11
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 12 11 10 11
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 12 11 11 10

```

9. /proc/meminfo

```
MemTotal: 1584829000 kB
```

10. who -r

```
run-level 5 Oct 10 13:04
```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)

```
Default Target Status
graphical degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT LOAD ACTIVE SUB DESCRIPTION
* rc-local.service loaded failed /etc/rc.local Compatibility
```

13. Services, from systemctl list-unit-files

| STATE | UNIT FILES |
|-----------------|--|
| enabled | ModemManager apparmor blk-availability chrony cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rpcbind rsyslog secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgaauth |
| enabled-runtime | netplan-ovs-cleanups rc-local systemd-fsck-root systemd-remount-fs |
| disabled | console-getty debug-shell grub-initrd-fallback ipmievd iscsid nftables rsync serial-getty@ sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext |
| generated | systemd-time-wait-sync upower |
| indirect | apport cpufrequtils edac loadcpufreq openipmi |
| masked | uuidd cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot nfs-common rc rcs screen-cleanup sudo systemd-timesyncd x11-common |

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Platform Notes (Continued)

```
14. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.15.0-84-generic
    root=UUID=2aa35e7a-56f6-460a-ae69-64654070d9c7
    ro
    pcie_aspm=off

15. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
        The governor "performance" may decide which speed to use
        within this range.
    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 2400MHz

16. tuned-adm active
Current active profile: latency-performance

17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           1

18. /sys/kernel/mm/transparent_hugepage
    defrag          [always] defer defer+madvise madvise never
    enabled         [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled   always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag              1
    max_ptes_none      511
    max_ptes_shared    256
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz, AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Platform Notes (Continued)

```
max_ptes_swap      64
pages_to_scan     4096
scan_sleep_millisecs 10000
```

```
-----  
20. OS release  
From /etc/*-release /etc/*-version  
os-release Ubuntu 22.04.2 LTS
```

```
-----  
21. Disk information  
SPEC is set to: /root/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/nvme0n1p2  ext4  3.5T  32G  3.3T   1%  /
```

```
-----  
22. /sys/devices/virtual/dmi/id  
Vendor:          Quanta Cloud Technology Inc.  
Product:         QuantaGrid D44N-1U  
Product Family: S6N
```

```
-----  
23. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
24x Micron Technology MTC36F2046S1PC48BA1 64 GB 2 rank 4800
```

```
-----  
24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      American Megatrends International, LLC.  
BIOS Version:    3A02  
BIOS Date:       09/21/2023  
BIOS Revision:   5.27  
Firmware Revision: 3.24
```

Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
```

```
-----  
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

```
=====  
C++    | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
```

```
-----  
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Compiler Version Notes (Continued)

=====
Fortran | 548.exchange2_r(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdaloc
```

C++ benchmarks:

```
-m64 -futo -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang  
-lamdaloc-ext
```

Fortran benchmarks:

```
-m64 -futo -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdaloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html>
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1.1_AMD_Genoa.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml>
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1.1_AMD_Genoa.xml



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Oct-2023

Hardware Availability: Nov-2023

Software Availability: Sep-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-10 09:06:20-0400.

Report generated on 2023-11-21 20:34:06 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-21.