



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11
(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3


Test Date: Nov-2023

Test Sponsor: HPE

Hardware Availability: Dec-2023

Tested by: HPE

Software Availability: Dec-2023

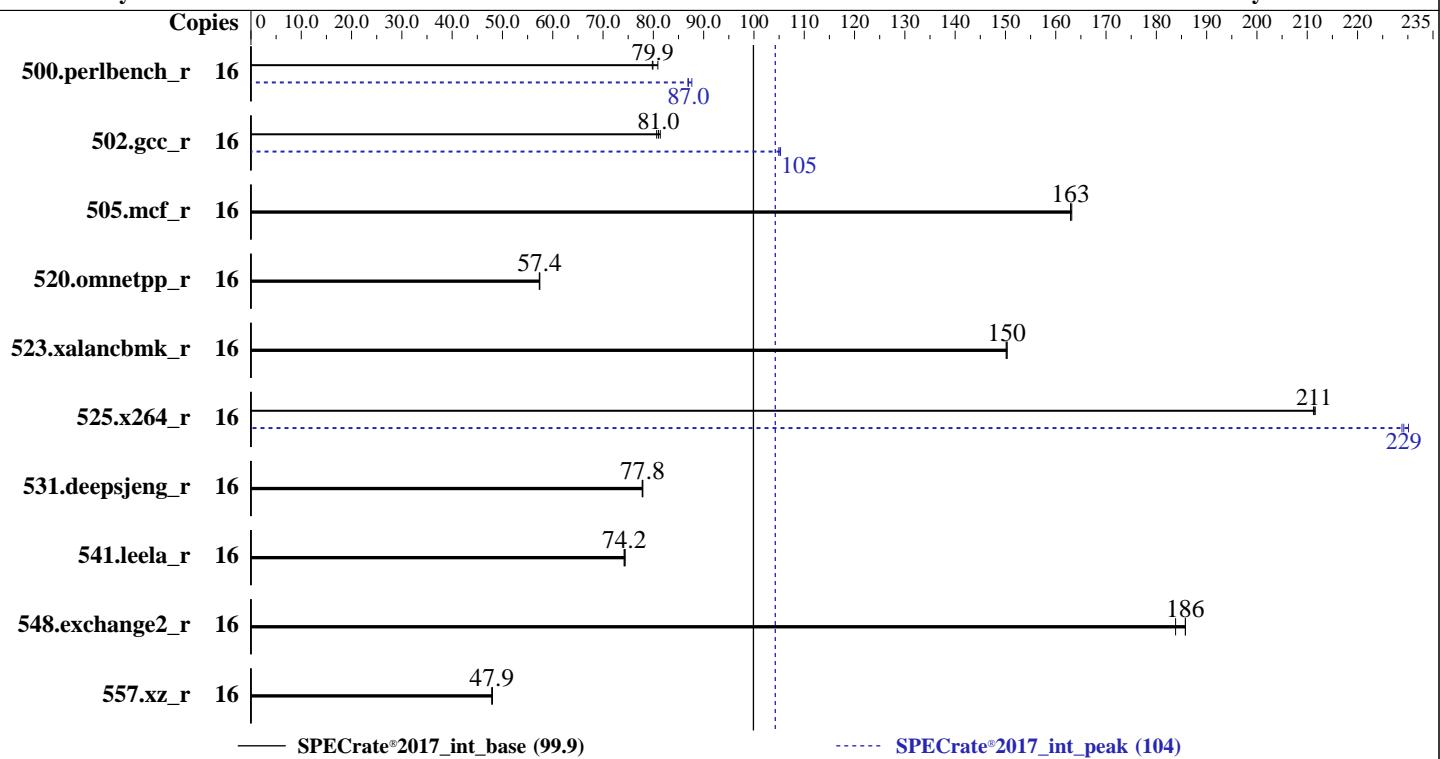

Hardware

CPU Name: Intel Xeon E-2488
Max MHz: 5600
Nominal: 3200
Enabled: 8 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 24 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400), orderable using HPE part# P64339-B21
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v1.40 10/18/2023 released Oct-2023
File System: xfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Date: Nov-2023

Test Sponsor: HPE

Hardware Availability: Dec-2023

Tested by: HPE

Software Availability: Dec-2023

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|------------|------------|------------|------------|------------|-------------|--------|------------|-------------|------------|------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 16 | 315 | 80.9 | 319 | 79.8 | 319 | 79.9 | 16 | 293 | 87.0 | 291 | 87.7 | 293 | 86.9 |
| 502.gcc_r | 16 | 278 | 81.4 | 281 | 80.7 | 280 | 81.0 | 16 | 215 | 105 | 215 | 105 | 216 | 105 |
| 505.mcf_r | 16 | 159 | 163 | 158 | 163 | 159 | 163 | 16 | 159 | 163 | 158 | 163 | 159 | 163 |
| 520.omnetpp_r | 16 | 366 | 57.3 | 366 | 57.4 | 366 | 57.4 | 16 | 366 | 57.3 | 366 | 57.4 | 366 | 57.4 |
| 523.xalancbmk_r | 16 | 112 | 150 | 112 | 150 | 113 | 150 | 16 | 112 | 150 | 112 | 150 | 113 | 150 |
| 525.x264_r | 16 | 133 | 211 | 132 | 212 | 133 | 211 | 16 | 122 | 229 | 122 | 230 | 122 | 229 |
| 531.deepsjeng_r | 16 | 236 | 77.8 | 235 | 77.9 | 236 | 77.8 | 16 | 236 | 77.8 | 235 | 77.9 | 236 | 77.8 |
| 541.leela_r | 16 | 356 | 74.4 | 357 | 74.2 | 357 | 74.2 | 16 | 356 | 74.4 | 357 | 74.2 | 357 | 74.2 |
| 548.exchange2_r | 16 | 226 | 186 | 226 | 186 | 228 | 184 | 16 | 226 | 186 | 226 | 186 | 228 | 184 |
| 557.xz_r | 16 | 360 | 48.0 | 361 | 47.9 | 361 | 47.9 | 16 | 360 | 48.0 | 361 | 47.9 | 361 | 47.9 |

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
 LD_LIBRARY_PATH = "/home/Cpu2017/lib/intel64:/home/Cpu2017/lib/ia32:/home/Cpu2017/je5.0.1-32"
 MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x11f for the Intel Xeon E-2488 processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute
Thermal Configuration set to Maximum Cooling
Enhanced Processor Performance Profile set to Enabled

```
Sysinfo program /home/Cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Nov 24 15:12:18 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
15:12:18 up 3 min, 3 users, load average: 0.25, 0.22, 0.10
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root : : 29Apr22 ?xdm? 9.28s 0.00s gdm-session-worker [pam/gdm-password]
root :1 :1 29Apr22 ?xdm? 9.28s 0.00s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root pts/1 172.17.1.13 29Apr22 10.00s 0.58s 0.00s -bash

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

| | |
|----------------------|-------------------------|
| core file size | (blocks, -c) unlimited |
| data seg size | (kbytes, -d) unlimited |
| scheduling priority | (-e) 0 |
| file size | (blocks, -f) unlimited |
| pending signals | (-i) 256711 |
| max locked memory | (kbytes, -l) 64 |
| max memory size | (kbytes, -m) unlimited |
| open files | (-n) 1024 |
| pipe size | (512 bytes, -p) 8 |
| POSIX message queues | (bytes, -q) 819200 |
| real-time priority | (-r) 0 |
| stack size | (kbytes, -s) unlimited |
| cpu time | (seconds, -t) unlimited |
| max user processes | (-u) 256711 |
| virtual memory | (kbytes, -v) unlimited |
| file locks | (-x) unlimited |

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/1
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
  ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define smt-on --define cores=8 --define physicalfirst
  --define no-numa --tune base,peak -o all --define drop_caches intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
  ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define smt-on --define cores=8 --define physicalfirst
  --define no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
  base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.intrate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Cpu2017
```

6. /proc/cpuinfo

| | |
|----------------------------------|--|
| model name | : Intel(R) Xeon(R) E E-2488 |
| vendor_id | : GenuineIntel |
| cpu family | : 6 |
| model | : 183 |
| stepping | : 1 |
| microcode | : 0x11f |
| bugs | : spectre_v1 spectre_v2 spec_store_bypass swapgs |
| cpu cores | : 8 |
| siblings | : 16 |
| 1 physical ids (chips) | |
| 16 processors (hardware threads) | |
| physical id 0: core ids 0-7 | |
| physical id 0: apicids 0-15 | |

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Date: Nov-2023

Test Sponsor: HPE

Hardware Availability: Dec-2023

Tested by: HPE

Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 48 bits virtual
Byte Order:           Little Endian
CPU(s):               16
On-line CPU(s) list: 0-15
Vendor ID:            GenuineIntel
Model name:           Intel(R) Xeon(R) E E-2488
CPU family:           6
Model:                183
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):            1
Stepping:             1
BogoMIPS:             6374.40
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
                      nonstop_tsc cpuid aperfmpfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsqbase
                      tsc_adjust bm1l avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                      clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves avx_vnni dtherm ida
                      arat pln pts umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid movdir64b
                      fsrm md_clear serialize pconfig arch_lbr flush_lld
                      arch_capabilities
Virtualization:        VT-x
L1d cache:             384 KiB (8 instances)
L1i cache:             256 KiB (8 instances)
L2 cache:              16 MiB (8 instances)
L3 cache:              24 MiB (1 instance)
NUMA node(s):          1
NUMA node0 CPU(s):     0-15
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 48K | 384K | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 256K | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 16M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 24M | 24M | 12 | Unified | 3 | 32768 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-15

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 0 size: 64202 MB
node 0 free: 62384 MB
node distances:
node 0
0: 10

-----
9. /proc/meminfo
MemTotal: 65743620 kB

-----
10. who -r
run-level 5 Apr 29 17:30

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
graphical running

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor audittd bluetooth cron
display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings klog
lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh
boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed
debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info gpm grub2-once
haveged-switch-root ipmi ipmievfd iscsid iscsiuio issue-add-ssh-keys kexec-load
lunmask man-db-create multipathd nfs nfs-blkmap nm-cloud-setup nmb openvpn@ ostree-remount
pppoe pppoe-server rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
udisks2 upower wpa_supplicant@
indirect pcsd saned@ wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=f27d316d-8e93-407b-b24e-bb9b59112f6c
splash=silent
resume=/dev/disk/by-uuid/e90ee60f-c9c6-49d9-8120-85942413fb15
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. tuned-adm active
  Current active profile: throughput-performance
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs        60000
defrag                      1
max_ptes_none                511
max_ptes_shared              256
max_ptes_swap                64
pages_to_scan                4096
scan_sleep_millisecs         10000

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

-----
20. Disk information
SPEC is set to: /home/Cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5        xfs   302G  101G  202G  34%  /home

-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant ML30 Gen11
Product Family:  ProLiant
Serial:          LXVBT01BVHZ03N

-----
22. dmidecode
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Platform Notes (Continued)

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Hynix HMCG88AGBEA084N 32 GB 2 rank 5600, configured at 4400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.40
BIOS Date: 10/18/2023
BIOS Revision: 1.40
Firmware Revision: 1.45

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -fsto
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin  
-lqkmalloc
```

502.gcc_r: -m32

```
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto  
-Ofast -ffast-math -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin  
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-RPL-rev2.0.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-RPL-rev2.0.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen11

(3.20 GHz, Intel Xeon E-2488)

SPECrate®2017_int_base = 99.9

SPECrate®2017_int_peak = 104

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-24 04:42:18-0500.

Report generated on 2024-02-16 12:26:19 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-20.