



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

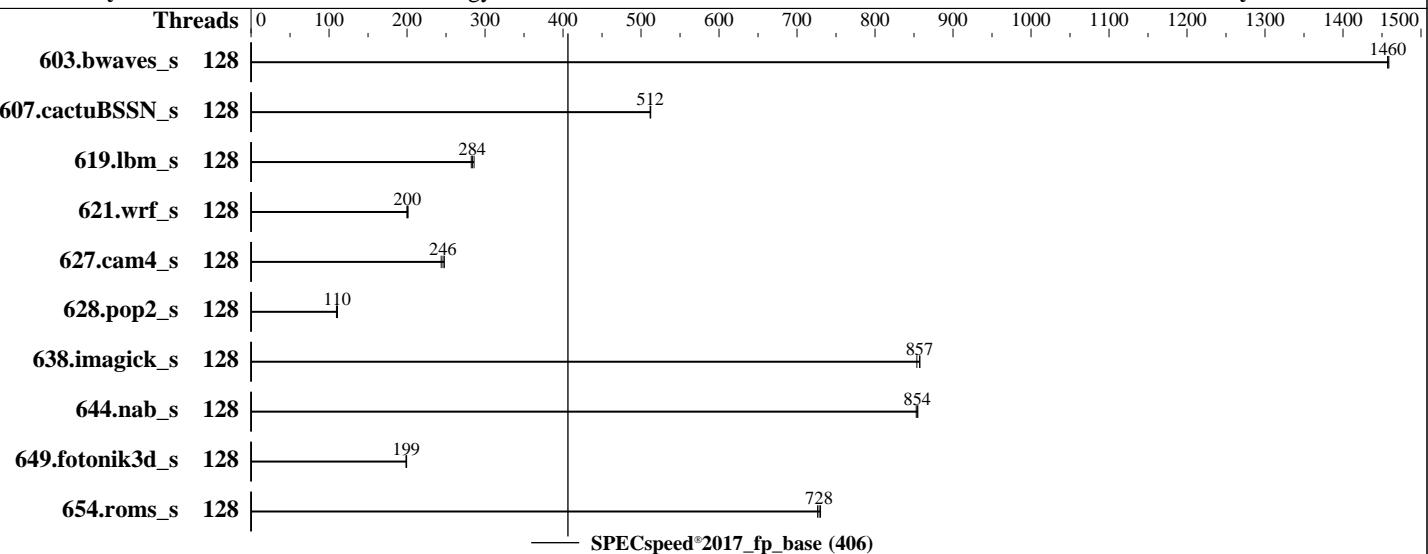

### Hardware

CPU Name: Intel Xeon Platinum 8592+  
Max MHz: 3900  
Nominal: 1900  
Enabled: 128 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 320 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)  
Storage: 1 x 480 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
Compiler: Kernel 5.14.21-150500.53-default  
C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: Lenovo BIOS Version FNE113F 2.20 released Jan-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads
603.bwaves_s	128	<b>40.5</b>	<b>1460</b>	40.4	1460	40.5	1460									
607.cactuBSSN_s	128	<b>32.6</b>	<b>512</b>	32.6	512	32.5	512									
619.lbm_s	128	<b>18.5</b>	<b>284</b>	18.3	286	18.6	282									
621.wrf_s	128	65.7	201	<b>66.0</b>	<b>200</b>	66.2	200									
627.cam4_s	128	36.4	244	35.8	248	<b>36.0</b>	<b>246</b>									
628.pop2_s	128	<b>107</b>	<b>110</b>	108	109	107	111									
638.imagick_s	128	16.8	858	16.9	854	<b>16.8</b>	<b>857</b>									
644.nab_s	128	20.4	855	20.5	853	<b>20.5</b>	<b>854</b>									
649.fotonik3d_s	128	<b>45.8</b>	<b>199</b>	45.7	199	45.9	199									
654.roms_s	128	<b>21.6</b>	<b>728</b>	21.6	730	21.7	726									

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes

### BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

Hyper-Threading set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Jan 14 02:33:53 2024
```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:33:53 up 2:39, 1 user, load average: 74.77, 104.60, 108.80
USER   TTY      FROM          LOGIN@    IDLE   JCPU   PCPU WHAT
root   ttym1     -           23:54    2:38m  0.76s  0.00s sh
Run153-compliant-ic2023.2.3-lin-core-avx512-speedfp-base-smt-off-20231121.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes (Continued)

```
file size          (blocks, -f) unlimited
pending signals   (-i) 4126882
max locked memory (kbytes, -l) 64
max memory size   (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size          (kbytes, -s) unlimited
cpu time            (seconds, -t) unlimited
max user processes  (-u) 4126882
virtual memory      (kbytes, -v) unlimited
file locks          (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./run_SD550V3_EMR.sh  
sh Run153-compliant-ic2023.2.3-lin-core-avx512-speedfp-base-smt-off-20231121.sh  
runcpu --nobuild --action validate --define default-platform-flags -c  
    ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=128 --tune base -o all --define drop_caches  
    fpspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
    ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=128 --tune base --output_format all --define  
    drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv  
    --logfile $SPEC/tmp/CPU2017.186/templogs/preenv.fpspeed.186.0.log --lognum 186.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3
```

```
-----  
6. /proc/cpuinfo  
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id        : GenuineIntel
cpu family       : 6
model           : 207
stepping         : 2
microcode        : 0x21000200
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brs
cpu cores        : 64
siblings         : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246,248,250,252,254
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

From lscpu from util-linux 2.37.4:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

**SPECspeed®2017\_fp\_base = 406**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024

**Hardware Availability:** Mar-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) PLATINUM 8592+
CPU family: 6
Model: 207
Thread(s) per core: 1
Core(s) per socket: 64
Socket(s): 2
Stepping: 2
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperfmpfperf tsc_known_freq pnipclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrpr pdcm pcid dca sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
       lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
       vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
       bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsaved xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
       cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
       avx512vbmi umip pkru ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
       avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
       cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
       arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 256 MiB (128 instances)
L3 cache: 640 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-63
NUMA node1 CPU(s): 64-127
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
      NAME  ONE-SIZE  ALL-SIZE  WAYS  TYPE      LEVEL    SETS  PHY-LINE  COHERENCY-SIZE
      L1d     48K       6M    12 Data          1      64        1        64
      L1i     32K       4M     8 Instruction   1      64        1        64
      L2      2M      256M    16 Unified        2     2048        1        64
      L3     320M      640M   20 Unified        3   262144        1        64

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Mar-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-63
node 0 size: 515709 MB
node 0 free: 513112 MB
node 1 cpus: 64-127
node 1 size: 516040 MB
node 1 free: 514764 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10
```

9. /proc/meminfo

```
MemTotal: 1056512596 kB
```

10. who -r

```
run-level 3 Jan 13 23:54
```

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT          LOAD ACTIVE SUB DESCRIPTION
* ntp_sync.service loaded failed ntp_sync.service
```

13. Services, from systemctl list-unit-files

STATE	UNIT	FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickedd-wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny	
enabled-runtime	systemd-remount-fs	
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievrd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd	
generated	ntp_sync	
indirect	wickedd	

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=1f1165ee-d57c-4884-9a69-769de0319f56
ro
splash=silent
mitigations=auto
quiet
security=apparmor
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Mar-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

15. cpupower frequency-info

```
analyzing CPU 0:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes
```

16. sysctl

```
kernel.numa_balancing          1  
kernel.randomize_va_space      2  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy       0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode            0
```

17. /sys/kernel/mm/transparent\_hugepage

```
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000  
defrag               1  
max_ptes_none        511  
max_ptes_shared       256  
max_ptes_swap         64  
pages_to_scan         4096  
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP5
```

20. Disk information

SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	446G	30G	416G	7%	/

21. /sys/devices/virtual/dmi/id

```
Vendor:      Lenovo
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Platform Notes (Continued)

Product: ThinkSystem SD550 V3  
Product Family: ThinkSystem  
Serial: 1234567890

-----  
22. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

9x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600  
7x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: FNE113F-2.20  
BIOS Date: 01/02/2024  
BIOS Revision: 2.20  
Firmware Revision: 1.10

## Compiler Version Notes

=====

C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN\_s(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD550 V3  
(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_base = 406

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-13 13:33:53-0500.

Report generated on 2024-02-06 19:19:04 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-06.