



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation


ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

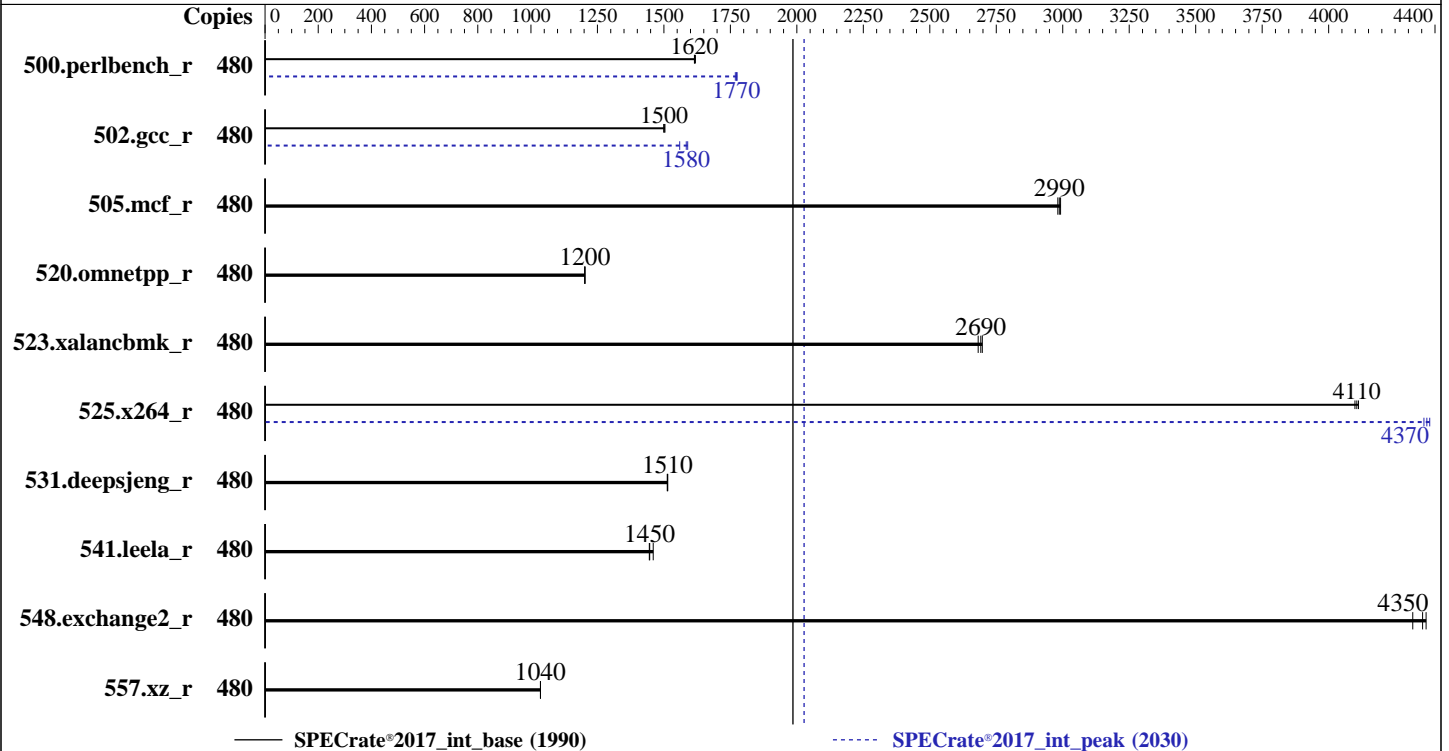

Hardware

CPU Name: Intel Xeon Platinum 8490H
Max MHz: 3500
Nominal: 1900
Enabled: 240 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 112.5 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
Kernel 5.14.0-70.22.1.el9_0.x86_64
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 01.23.04.10 released Jan-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation
ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	480	472	1620	473	1620	473	1610	480	432	1770	430	1780	431	1770
502.gcc_r	480	452	1500	453	1500	453	1500	480	436	1560	428	1590	429	1580
505.mcf_r	480	260	2980	259	2990	260	2990	480	260	2980	259	2990	260	2990
520.omnetpp_r	480	524	1200	523	1200	524	1200	480	524	1200	523	1200	524	1200
523.xalancbmk_r	480	188	2700	189	2680	188	2690	480	188	2700	189	2680	188	2690
525.x264_r	480	204	4110	205	4100	205	4110	480	192	4380	192	4370	193	4360
531.deepsjeng_r	480	364	1510	363	1510	363	1510	480	364	1510	363	1510	363	1510
541.leela_r	480	549	1450	550	1450	545	1460	480	549	1450	550	1450	545	1460
548.exchange2_r	480	288	4370	291	4320	289	4350	480	288	4370	291	4320	289	4350
557.xz_r	480	500	1040	501	1040	500	1040	480	500	1040	501	1040	500	1040

SPECrate®2017_int_base = **1990**

SPECrate®2017_int_peak = **2030**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec/lib/intel64:/home/spec/lib/ia32:/home/spec/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
ENERGY_PERF_BIAS_CFG mode = performance
LLC dead line alloc = Disabled
Patrol Scrub = Disabled
Intel VT for Directed I/O (VT-d) = Disabled
SR-IOV Support = Disabled
Sub NUMA(SNC) = Enable SNC4

Sysinfo program /home/spec/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Sun Feb 4 19:52:16 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
19:52:16 up 23 min, 1 user, load average: 0.04, 0.25, 0.78
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
root     pts/0    19:37   8.00s  1.14s  0.00s  /bin/sh
./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation
ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 8252983
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8252983
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=240 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=240 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0004d0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 60
siblings       : 120
4 physical ids (chips)
480 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 3: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                       480
On-line CPU(s) list:         0-479
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:             Intel(R) Xeon(R) Platinum 8490H
CPU family:                   6
Model:                        143
Thread(s) per core:          2
Core(s) per socket:          60
Socket(s):                    4
Stepping:                     8
CPU max MHz:                  3500.0000
CPU min MHz:                  800.0000
BogoMIPS:                     3800.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                                avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                                wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                                avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg tme avx512_vpoperntdq la57 rdpid bus_lock_detect
                                cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

L1d cache:                    11.3 MiB (240 instances)
L1i cache:                    7.5 MiB (240 instances)
L2 cache:                     480 MiB (240 instances)
L3 cache:                     450 MiB (4 instances)
NUMA node(s):                 16
NUMA node0 CPU(s):            0-14,240-254
NUMA node1 CPU(s):            15-29,255-269
NUMA node2 CPU(s):            30-44,270-284
NUMA node3 CPU(s):            45-59,285-299
NUMA node4 CPU(s):            60-74,300-314
NUMA node5 CPU(s):            75-89,315-329
NUMA node6 CPU(s):            90-104,330-344

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

NUMA node7 CPU(s):          105-119,345-359
NUMA node8 CPU(s):          120-134,360-374
NUMA node9 CPU(s):          135-149,375-389
NUMA node10 CPU(s):         150-164,390-404
NUMA node11 CPU(s):         165-179,405-419
NUMA node12 CPU(s):         180-194,420-434
NUMA node13 CPU(s):         195-209,435-449
NUMA node14 CPU(s):         210-224,450-464
NUMA node15 CPU(s):         225-239,465-479
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-14,240-254
node 0 size: 128088 MB
node 0 free: 126400 MB
node 1 cpus: 15-29,255-269
node 1 size: 129017 MB
node 1 free: 128728 MB
node 2 cpus: 30-44,270-284
node 2 size: 129017 MB
node 2 free: 128815 MB
node 3 cpus: 45-59,285-299
node 3 size: 129017 MB
node 3 free: 128828 MB
node 4 cpus: 60-74,300-314
node 4 size: 129017 MB
node 4 free: 128801 MB
node 5 cpus: 75-89,315-329
node 5 size: 129017 MB
node 5 free: 128796 MB
node 6 cpus: 90-104,330-344
node 6 size: 129017 MB
node 6 free: 128797 MB
node 7 cpus: 105-119,345-359
node 7 size: 128981 MB
node 7 free: 128773 MB
node 8 cpus: 120-134,360-374
node 8 size: 129017 MB
node 8 free: 128800 MB
node 9 cpus: 135-149,375-389
node 9 size: 129017 MB
node 9 free: 128811 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

node 10 cpus: 150-164,390-404
node 10 size: 129017 MB
node 10 free: 128808 MB
node 11 cpus: 165-179,405-419
node 11 size: 129017 MB
node 11 free: 123426 MB
node 12 cpus: 180-194,420-434
node 12 size: 129017 MB
node 12 free: 128456 MB
node 13 cpus: 195-209,435-449
node 13 size: 129017 MB
node 13 free: 127258 MB
node 14 cpus: 210-224,450-464
node 14 size: 129017 MB
node 14 free: 127535 MB
node 15 cpus: 225-239,465-479
node 15 size: 128988 MB
node 15 free: 128725 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0: 10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
1: 12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
2: 12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
3: 12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
4: 21 21 21 21 10 12 12 12 21 21 21 21 21 21 21 21
5: 21 21 21 21 12 10 12 12 21 21 21 21 21 21 21 21
6: 21 21 21 21 12 12 10 12 21 21 21 21 21 21 21 21
7: 21 21 21 21 21 12 12 12 10 21 21 21 21 21 21 21
8: 21 21 21 21 21 21 21 21 10 12 12 12 21 21 21 21
9: 21 21 21 21 21 21 21 21 12 10 12 12 21 21 21 21
10: 21 21 21 21 21 21 21 21 12 12 10 12 21 21 21 21
11: 21 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21
12: 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12 12
13: 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12 12
14: 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12 12
15: 21 21 21 21 21 21 21 21 21 21 21 12 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      2112805036 kB

```

```

-----
10. who -r
run-level 3 Feb 4 19:29

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
systemd-network-generator udisks2
enabled-runtime systemd-remount-fs
disabled blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat
man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
ssh-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext target
targetclid
indirect          sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
processor_speculative_off=nospectre_v1=off
tsx_async_abort=off
nohz_full=0-479
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.50 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information
SPEC is set to: /home/spec
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 14G 806G 2% /home

20. /sys/devices/virtual/dmi/id
Vendor: ZTE
Product: R8500 G5
Product Family: Server
Serial: 219413636851

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
32x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends Inc.
BIOS Version: 01.23.04.10
BIOS Date: 01/31/2024
BIOS Revision: 1.23

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallocc
```

```
502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation
ZTE R8500G5 Server System
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_int_base = 1990

SPECrate®2017_int_peak = 2030

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Feb-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes
523.xalancbmk_r: basepeak = yes
531.deepsjeng_r: basepeak = yes
541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>
<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-SPR-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-SPR-V1.7.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-04 19:52:15-0500.
Report generated on 2024-02-28 19:10:26 by CPU2017 PDF formatter v6716.
Originally published on 2024-02-27.