



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

### SPECrate®2017\_fp\_base = 359

## NF5280M7 (Intel Xeon Silver 4510)

### SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358


Test Date: Feb-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

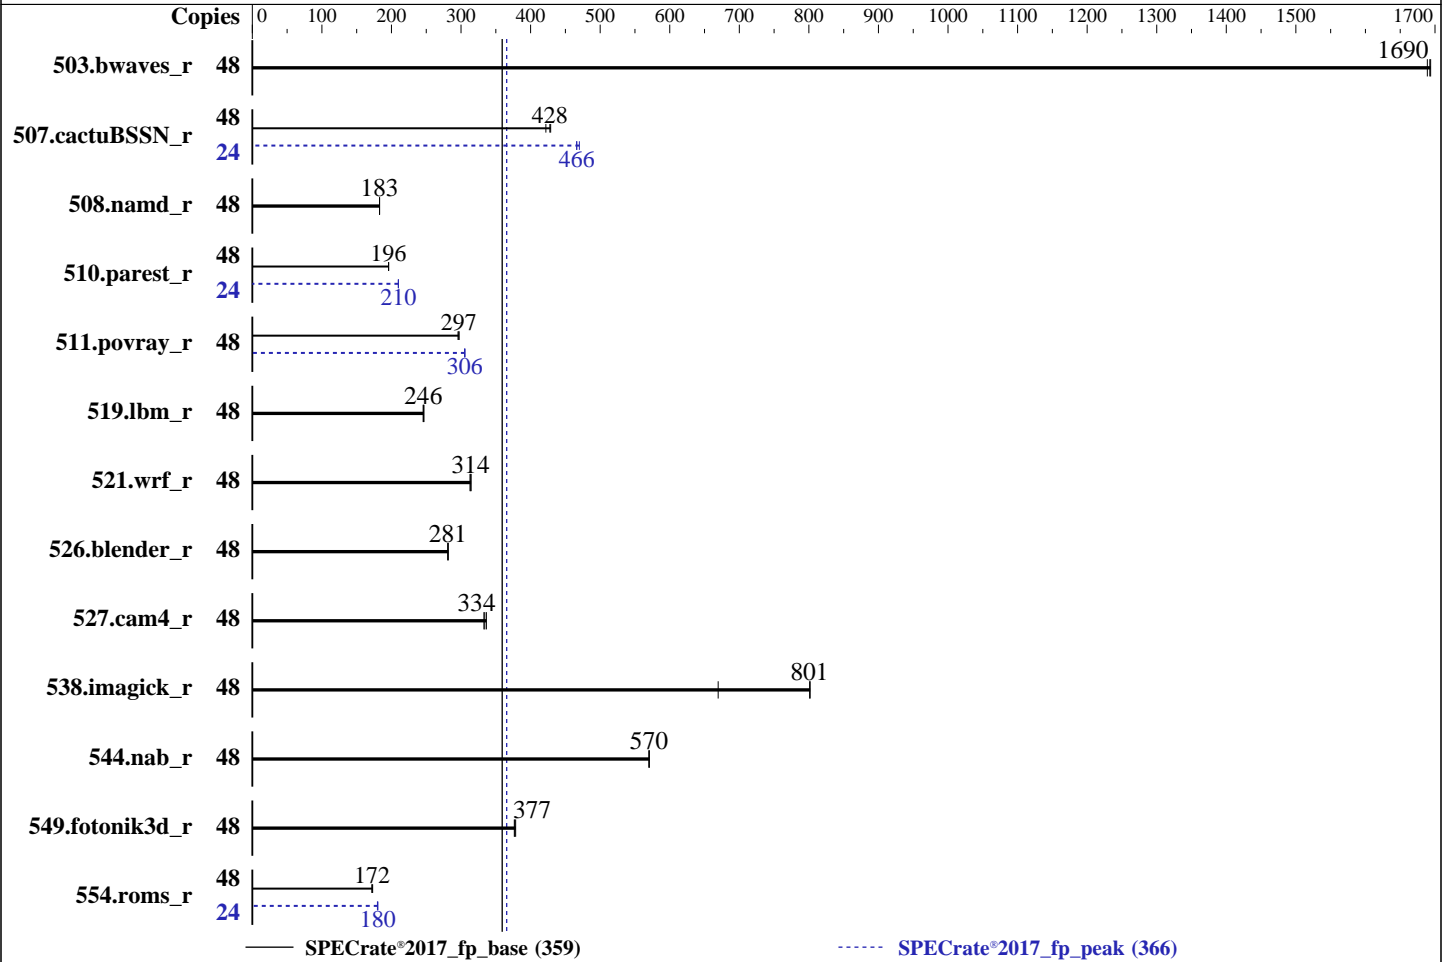

### Hardware

CPU Name: Intel Xeon Silver 4510  
 Max MHz: 4100  
 Nominal: 2400  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)  
 Storage: 1 x 3.84 TB NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 05.13.00 released Nov-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

## NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	<b>284</b>	<b>1690</b>	284	1690	285	1690	48	<b>284</b>	<b>1690</b>	284	1690	285	1690
507.cactuBSSN_r	48	142	429	144	422	<b>142</b>	<b>428</b>	24	64.6	470	<b>65.1</b>	<b>466</b>	65.2	466
508.namd_r	48	249	183	249	183	<b>249</b>	<b>183</b>	48	249	183	249	183	<b>249</b>	<b>183</b>
510.parest_r	48	<b>641</b>	<b>196</b>	641	196	641	196	24	299	210	<b>299</b>	<b>210</b>	299	210
511.povray_r	48	<b>378</b>	<b>297</b>	379	296	377	297	48	<b>367</b>	<b>306</b>	367	305	367	306
519.lbm_r	48	205	247	206	246	<b>206</b>	<b>246</b>	48	205	247	206	246	<b>206</b>	<b>246</b>
521.wrf_r	48	<b>343</b>	<b>314</b>	342	314	344	313	48	<b>343</b>	<b>314</b>	342	314	344	313
526.blender_r	48	260	281	<b>260</b>	<b>281</b>	260	282	48	260	281	<b>260</b>	<b>281</b>	260	282
527.cam4_r	48	<b>251</b>	<b>334</b>	250	336	252	333	48	<b>251</b>	<b>334</b>	250	336	252	333
538.imagick_r	48	<b>149</b>	<b>801</b>	178	670	149	802	48	<b>149</b>	<b>801</b>	178	670	149	802
544.nab_r	48	142	570	142	570	<b>142</b>	<b>570</b>	48	142	570	142	570	<b>142</b>	<b>570</b>
549.fotonik3d_r	48	<b>496</b>	<b>377</b>	494	379	497	377	48	<b>496</b>	<b>377</b>	494	379	497	377
554.roms_r	48	441	173	<b>443</b>	<b>172</b>	443	172	24	212	180	<b>212</b>	<b>180</b>	212	180

SPECrate®2017\_fp\_base = 359

SPECrate®2017\_fp\_peak = 366

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
Sub NUMA Cluster (SNC) set to SNC2

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Sat Feb 24 14:10:12 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux localhost.localdomain 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023
(b630043) x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
14:10:12 up 16:02, 1 user, load average: 28.48, 42.86, 45.90

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

## NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

### Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	06:07	5:25m	1.06s	0.01s	-bash

#### 3. Username

From environment variable \$USER: root

#### 4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4124614
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4124614
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.010/templogs/preenv.fprate.010.0.log --lognum 010.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

#### 6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) SILVER 4510
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b000461
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 12
siblings      : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0-23
physical id 1: apicids 64-87

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) SILVER 4510
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):              2
Stepping:               8
CPU max MHz:            4100.0000
CPU min MHz:            800.0000
BogoMIPS:               3800.00
Flags:                  fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat_pse36
                        clflush_dts_acpi_mmx_fxsr_sse_sse2_ss_ht_tm_pbe_syscall_nx_pdpelgb_rdtscp
                        lm_constant_tsc_art_arch_perfmon_pebs_bts_rep_good_nopl_xtopology
                        nonstop_tsc_cpuid_aperfperf_tsc_known_freq_pni_pclmulqdq_dtes64_monitor
                        ds_cpl_smx_est_tm2_ssse3_sdbg_fma_cx16_xtpr_pdc_m_pcid_dca_sse4_1_sse4_2
                        x2apic_movbe_popcnt_tsc_deadline_timer_aes_xsave_avx_f16c_rdrand_lahf_lm
                        abm_3dnowprefetch_cpuid_fault_epb_cat_13_cat_12_cdp_13_invpcid_single
                        intel_ppin_cdp_12_ssbd_mba_ibrs_ibpb_stibp_ibrs_enhanced_fsgsbase
                        tsc_adjust_bmi1_hle_avx2_smep_bmi2_erms_invpcid_rtm_cqm_rdt_a_avx512f
                        avx512dq_rdseed_adx_smap_avx512ifma_clflushopt_clwb_intel_pt_avx512cd
                        sha_ni_avx512bw_avx512vl_xsaveopt_xsavec_xgetbv1_xsaves_cqm_llc
                        cqm_occup_llc_cqm_mbm_total_cqm_mbm_local_split_lock_detect_avx_vnni
                        avx512_bf16_wbnoinvd_dtherm_ida_arat_pln_pts_hwp_hwp_act_window_hwp_epp
                        hwp_pkg_req_avx512vbmi_umip_pku_ospke_waitpkg_avx512_vbmi2_gfni_vaes
                        vpclmulqdq_avx512_vnni_avx512_bitalg_tme_avx512_vpoperntdq_la57_rdpid
                        bus_lock_detect_cldemote_movdiri_movdir64b_enqcmd_fsrn_md_clear_serialize
                        tsxldtrk_pconfig_arch_lbr_avx512_fp16_amx_tile_flush_llid_arch_capabilities
L1d cache:             1.1 MiB (24 instances)
L1i cache:             768 KiB (24 instances)
L2 cache:              48 MiB (24 instances)
L3 cache:              60 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-5,24-29
NUMA node1 CPU(s):    6-11,30-35
NUMA node2 CPU(s):    12-17,36-41
NUMA node3 CPU(s):    18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 257540 MB
node 0 free: 241572 MB
node 1 cpus: 6-11,30-35
node 1 size: 258044 MB
node 1 free: 251090 MB
node 2 cpus: 12-17,36-41
node 2 size: 258044 MB
node 2 free: 252532 MB
node 3 cpus: 18-23,42-47
node 3 size: 257547 MB
node 3 free: 251749 MB
node distances:
node  0  1  2  3
0:  10 12 21 21
1:  12 10 21 21
2:  21 21 10 12
3:  21 21 12 10

```

9. /proc/meminfo

MemTotal: 1055925708 kB

10. who -r

run-level 3 Feb 24 06:07

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early nvme-fc-boot-connections postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell dnsmasq ebttables exchange-bmc-os-info grub2-once haveged haveged-switch-root ipmievd issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap nvme-fc-autoconnect rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd wpa_supplicant@ wickedd
indirect	wickedd

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=a59515e6-248a-4127-a0b3-55e3eb914592
splash=silent
resume=/dev/disk/by-uuid/6c324f52-0c62-433d-ac4d-77e32d920d61
mitigations=auto
quiet
security=apparmor
crashkernel=451M,high
crashkernel=72M,low

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

scan\_sleep\_millisecs 10000

### 18. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

### 19. Disk information

SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p3 xfs 2.5T 46G 2.5T 2% /home

### 20. /sys/devices/virtual/dmi/id

Vendor: IEIT  
Product: NF5280-M7-A0-R0-00  
Product Family: Not specified  
Serial: 000000000

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 05.13.00  
BIOS Date: 11/30/2023

## Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

### Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:

`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib`

## Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using both C and C++:

`icpx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`519.lbm_r: basepeak = yes`

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Date: Feb-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Dec-2023

Tested by: IEIT Systems Co., Ltd.

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 359

NF5280M7 (Intel Xeon Silver 4510)

SPECrate®2017\_fp\_peak = 366

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-24 01:10:12-0500.

Report generated on 2024-03-14 10:59:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-13.