



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant ML350 Gen11

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.1

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

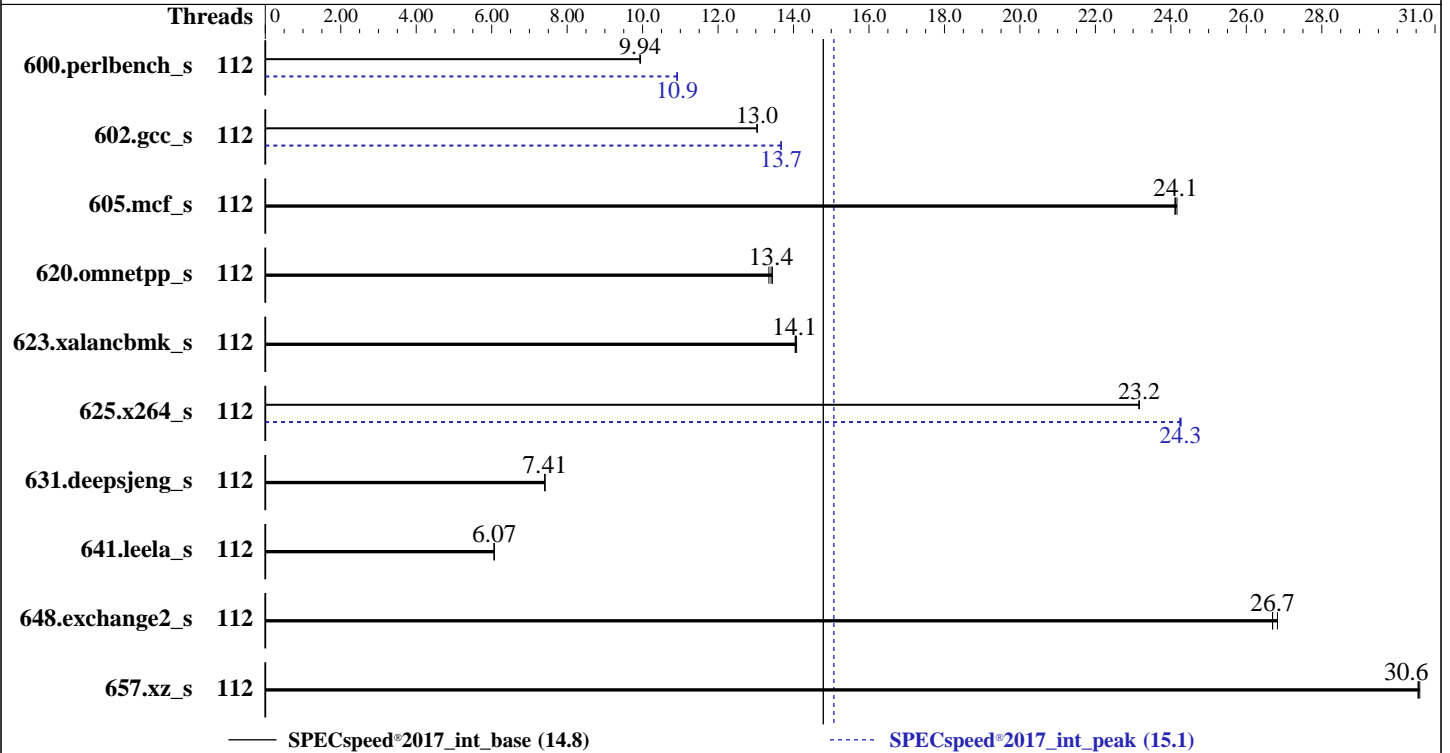

### Hardware

CPU Name: Intel Xeon Platinum 8570  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 112 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 300 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant ML350 Gen11

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.1

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2024  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	179	9.93	<b><u>179</u></b>	<b><u>9.94</u></b>	178	9.94	112	<b><u>163</u></b>	<b><u>10.9</u></b>	163	10.9	163	10.9
602.gcc_s	112	305	13.0	306	13.0	<b><u>306</u></b>	<b><u>13.0</u></b>	112	291	13.7	291	13.7	<b><u>291</u></b>	<b><u>13.7</u></b>
605.mcf_s	112	<b><u>196</u></b>	<b><u>24.1</u></b>	196	24.1	195	24.2	112	<b><u>196</u></b>	<b><u>24.1</u></b>	196	24.1	195	24.2
620.omnetpp_s	112	121	13.4	122	13.3	<b><u>122</u></b>	<b><u>13.4</u></b>	112	121	13.4	122	13.3	<b><u>122</u></b>	<b><u>13.4</u></b>
623.xalancbmk_s	112	101	14.0	101	14.1	<b><u>101</u></b>	<b><u>14.1</u></b>	112	101	14.0	101	14.1	<b><u>101</u></b>	<b><u>14.1</u></b>
625.x264_s	112	<b><u>76.2</u></b>	<b><u>23.2</u></b>	76.2	23.2	76.2	23.2	112	72.8	24.2	<b><u>72.7</u></b>	<b><u>24.3</u></b>	72.7	24.3
631.deepsjeng_s	112	193	7.41	<b><u>193</u></b>	<b><u>7.41</u></b>	193	7.41	112	193	7.41	<b><u>193</u></b>	<b><u>7.41</u></b>	193	7.41
641.leela_s	112	<b><u>281</u></b>	<b><u>6.07</u></b>	281	6.06	281	6.07	112	<b><u>281</u></b>	<b><u>6.07</u></b>	281	6.06	281	6.07
648.exchange2_s	112	110	26.7	<b><u>110</u></b>	<b><u>26.7</u></b>	110	26.8	112	110	26.7	<b><u>110</u></b>	<b><u>26.7</u></b>	110	26.8
657.xz_s	112	<b><u>202</u></b>	<b><u>30.6</u></b>	202	30.5	202	30.6	112	<b><u>202</u></b>	<b><u>30.6</u></b>	202	30.5	202	30.6

SPECspeed®2017\_int\_base = **14.8**

SPECspeed®2017\_int\_peak = **15.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_int\_base = 14.8**

**SPECspeed®2017\_int\_peak = 15.1**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x21000200 for the Intel Xeon Platinum 8570 processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute  
Thermal Configuration set to Maximum Cooling  
Intel Hyper-Threading set to Disabled  
Memory Patrol Scrubbing set to Disabled  
Enhanced Processor Performance Profile set to Aggressive  
Dead Block Predictor set to Enabled  
Sub-NUMA Clustering (SNC) set to Enable SNC2(2-clusters)  
Workload Profile set to Custom  
Adjacent Sector Prefetch set to Disabled  
Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Mar 6 02:15:51 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_int\_base = 14.8**

**SPECspeed®2017\_int\_peak = 15.1**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

2. w  
02:15:51 up 2 min, 0 users, load average: 0.19, 0.24, 0.10  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2062732  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2062732  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 29  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root@notty  
bash -c cd \$SPEC/ && \$SPEC/intspeedTP.sh  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=112 --tune base,peak -o all --define  
intspeedaffinity --define drop\_caches intspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=112 --tune base,peak --output\_format all  
--define intspeedaffinity --define drop\_caches --nopower --runmode speed --tune base:peak --size refspeed  
intspeed --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log  
--lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : INTEL(R) XEON(R) PLATINUM 8570  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 207  
stepping : 2  
microcode : 0x21000200  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs eibrs\_pbrsb  
cpu cores : 56  
siblings : 56  
2 physical ids (chips)  
112 processors (hardware threads)  
physical id 0: core ids 0-55  
physical id 1: core ids 0-55

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_int\_base = 14.8**

**SPECspeed®2017\_int\_peak = 15.1**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

physical id 0: apicids  
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110

physical id 1: apicids  
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Vendor ID:              GenuineIntel
Model name:              INTEL(R) XEON(R) PLATINUM 8570
CPU family:              6
Model:                  207
Thread(s) per core:     1
Core(s) per socket:     56
Socket(s):               2
Stepping:                2
BogoMIPS:                4200.00
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:         VT-x
L1d cache:              5.3 MiB (112 instances)
L1i cache:              3.5 MiB (112 instances)
L2 cache:               224 MiB (112 instances)
L3 cache:               600 MiB (2 instances)
NUMA node(s):           4
NUMA node0 CPU(s):      0-13,56-69
NUMA node1 CPU(s):      14-27,70-83
NUMA node2 CPU(s):      28-41,84-97
NUMA node3 CPU(s):      42-55,98-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

Vulnerability Mmio stale data: Not affected  
 Vulnerability Retbleed: Not affected  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRBS-eIBRS SW sequence  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	300M	600M	20	Unified	3	245760	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-13,56-69
node 0 size: 128710 MB
node 0 free: 127997 MB
node 1 cpus: 14-27,70-83
node 1 size: 129016 MB
node 1 free: 128624 MB
node 2 cpus: 28-41,84-97
node 2 size: 129016 MB
node 2 free: 128453 MB
node 3 cpus: 42-55,98-111
node 3 size: 128961 MB
node 3 free: 128562 MB
node distances:
node  0  1  2  3
0:  10  20  30  30
1:  20  10  30  30
2:  30  30  10  20
3:  30  30  20  10
```

9. /proc/meminfo

MemTotal: 528082980 kB

10. who -r

run-level 3 Mar 6 02:15

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant ML350 Gen11

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load lunmask
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=930f8b53-ff67-403e-9053-e3aa4fef0050
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. tuned-adm active
Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```

max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       btrfs 446G  208G  238G  47% /home

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant ML350 Gen11
Product Family: ProLiant
Serial:          CNX20800P4

```

```

-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Hynix HMC88AGBRA193N 32 GB 2 rank 5600

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     2.12
BIOS Date:        12/13/2023
BIOS Revision:    2.12
Firmware Revision: 1.54

```

## Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```

```

=====
C++   | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_int\_base = 14.8

SPECspeed®2017\_int\_peak = 15.1

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-05 15:45:50-0500.

Report generated on 2024-03-27 20:12:36 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.