




CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

ASUS Computer International
Asus M2N32-SLI Deluxe, AMD Athlon (TM) 64 5000+

SPECfp_rate2000 = 35.2
SPECfp_rate_base2000 = 32.0

SPEC license #: 13 Tested by: Intel Corporation Test date: Jul-2006 Hardware Avail: Jun-2006 Software Avail: Jun-2006

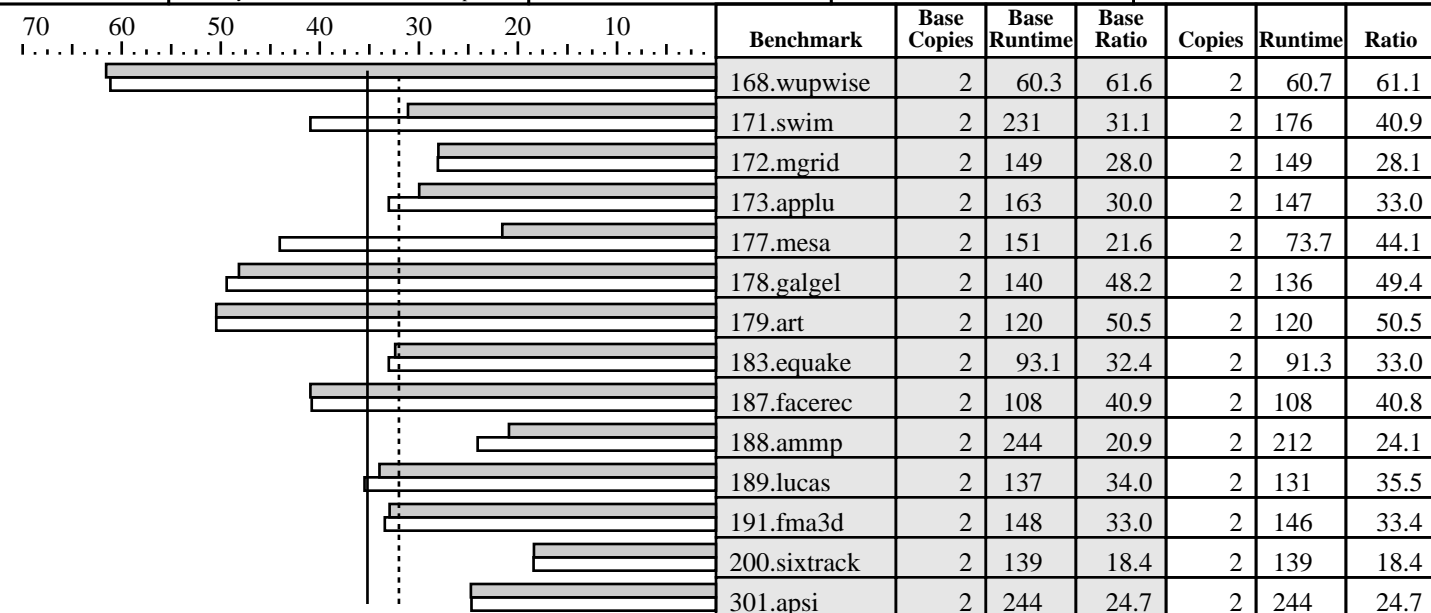

Hardware

CPU: AMD Athlon (TM) 64 5000+
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1
 Parallel: no
 Primary Cache: 64KBI + 64KBD on chip, per core
 Secondary Cache: 512KB (I+D) on chip, per core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 2x1 GB, Corsair CM2X1024-8500C5 DDR2-1066 (manually set to DDR2-800 5-5-5-15 in the bios)
 Disk Subsystem: SATA, Western Digital WD740GD, 10000 rpm
 Other Hardware: None

Software

Operating System: Microsoft Windows XP SP2
 Compiler: Intel C++ 9.1 build 20060519Z for IA32, Intel Fortran 9.1 build 20060519Z for IA32, PGI Fortran compiler 6.0-5 for Windows XP, PGI C compiler 6.0-5 for Windows XP, ACML Version 2.5.3 (bundled with PGI 6.0-5)
 File System: NTFS
 System State: default

Notes/Tuning Information

```
+FDO:
  icl, ifort : PASS1=-Qprof_gen PASS2=-Qprof_use
  pgf90      : PASS1=-Mpfi      PASS2=-Mpfo
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran 90 compiler.
pgcc is the PGI C compiler.
ONESTEP is set to 1 for every compile with the PGI compilers.
Portability:
178.galgel: -Mfixed
Baseline: C : pgcc -fastsse -Mipa=fast,inline
Baseline: Fortran: pgf90 -fastsse -Mipa=fast,inline +FDO
Peak tuning:
168.wupwise: pgf90 -fastsse -Mipa=fast,inline -Mvect
171.swim: ifort -Qipo -O3 -QaxN -QxW -Qunroll0 +FDO
172.mgrid: pgf90 -fastsse -Mipa=fast,inline
173.applu: ifort -Qipo -O3 -QaxN -QxW -auto +FDO
177.mesa: icl -Qipo -arch:SSE2 -Qunroll1 -Qansi_alias +FDO
```



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

ASUS Computer International
Asus M2N32-SLI Deluxe, AMD Athlon (TM) 64 5000+

SPECfp_rate2000 = 35.2
SPECfp_rate_base2000 = 32.0

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jul-2006 | Hardware Avail: Jun-2006 | Software Avail: Jun-2006

Notes/Tuning Information (Continued)

-Qoption,f,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500

```

178.galgel:      pgf90  -fastsse -Mipa=fast,safe -Munix -lacml
                  RM_SOURCES=lapak.f90
179.art:         pgcc   basepeak=yes
183.quake:       icl    -fast -arch:SSE2 -QaxW +FDO
187.facerec:     pgf90  -fastsse -Mipa=fast,inline +FDO
188.ampp:        icl    -Oa  -arch:SSE2 -Zp4 -Qansi_alias
189.lucas:       ifort  -Qipo -QxW -Qunroll1
191.fma3d:       pgf90  -Mipa=fast,inline -fastsse -Mnovect +FDO
200.sixtrack:    pgf90  -fastsse -Mipa=fast,inline
301.apsi:        pgf90  -fastsse -Mipa=fast,inline

```

The SUT was built with a discrete PCIe graphics card (ATI Radeon X850 XT) and an ATX 550W power supply. The 2 DIMMs were configured in dual-channel mode.