



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Sun Microsystems  
Sun Fire X4200 M2**

**SPECfp®\_rate2006 = 47.3  
SPECfp\_rate\_base2006 = 44.9**

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Apr-2007

Hardware Availability: Oct-2006

Software Availability: Aug-2006

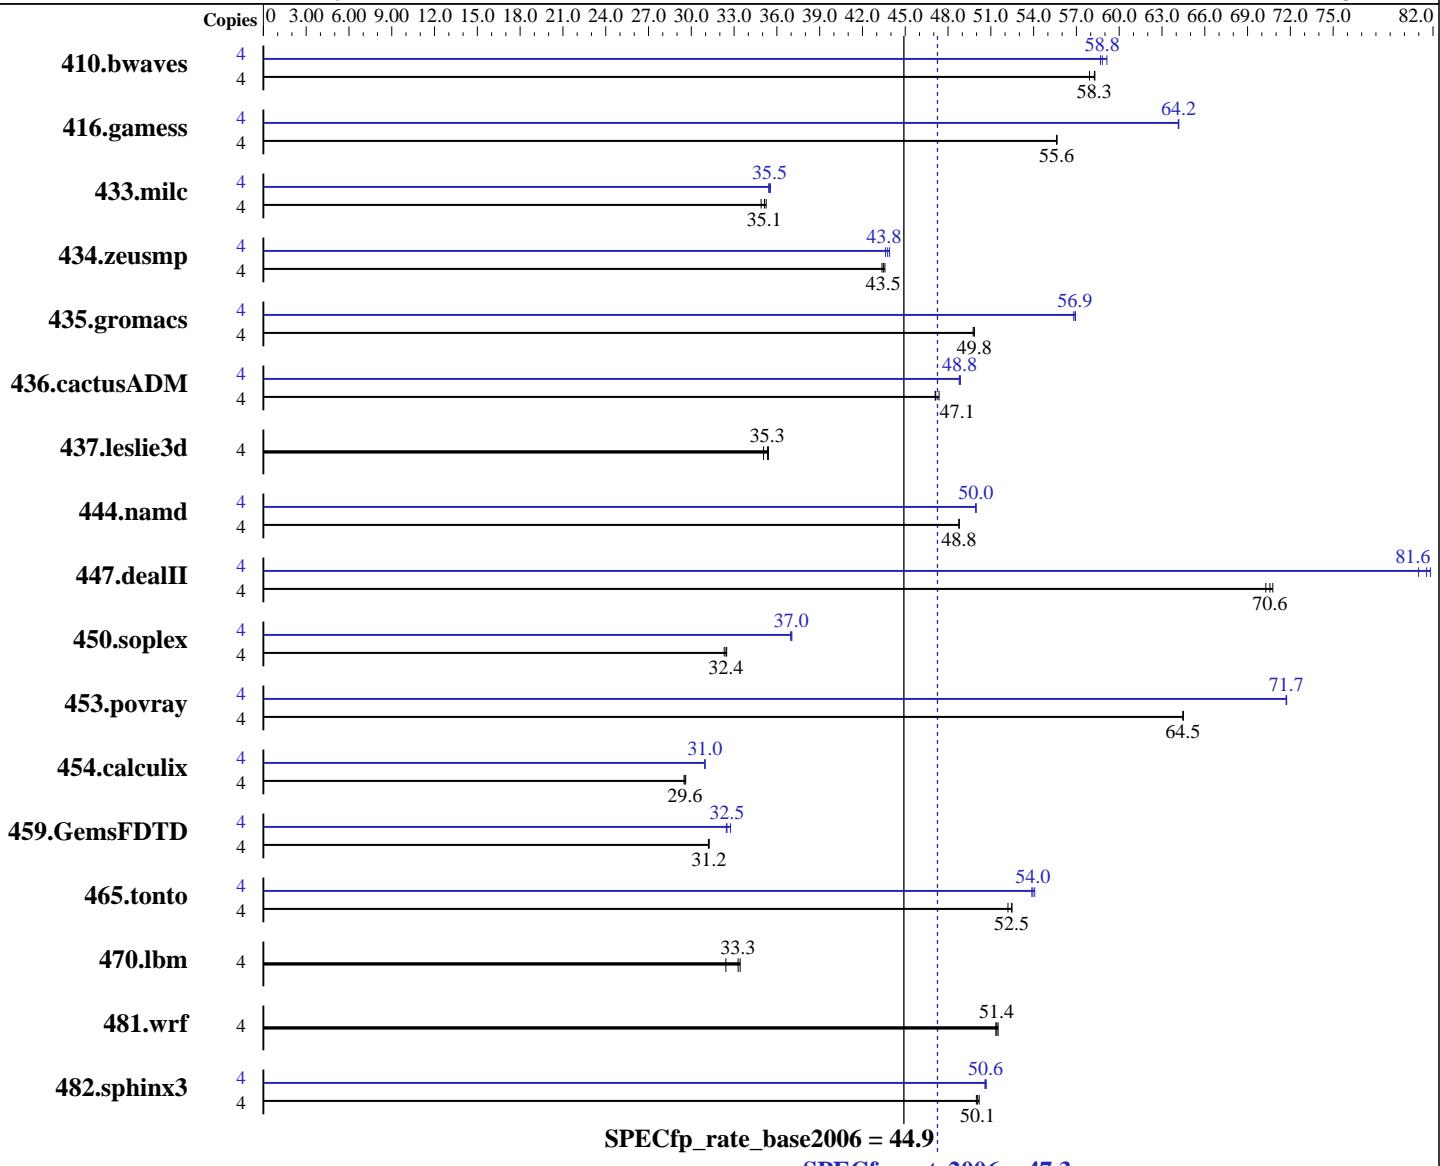

## Hardware

CPU Name: AMD Opteron 2220  
CPU Characteristics:  
CPU MHz: 2800  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 64 KB I + 64 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: RedHat Enterprise Linux AS release 4 Update 5  
Compiler: QLogic PathScale Compiler Suite, Release 2.5  
Auto Parallel: No  
File System: ext3  
System State: Multi-user, run level 3  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Sun Microsystems  
Sun Fire X4200 M2**

**SPECfp\_rate2006 = 47.3  
SPECfp\_rate\_base2006 = 44.9**

**CPU2006 license:** 6

**Test sponsor:** Sun Microsystems

**Tested by:** Sun Microsystems

**Test date:** Apr-2007

**Hardware Availability:** Oct-2006

**Software Availability:** Aug-2006

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 x 2GB, DDR2-667 CL5 ECC Reg Dual Rank)  
Disk Subsystem: SAS, 72 GB, 10K RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<b>933</b>	<b>58.3</b>	932	58.3	939	57.9	4	<b>926</b>	<b>58.7</b>	919	59.1	<b>924</b>	<b>58.8</b>
416.gamess	4	<b>1408</b>	<b>55.6</b>	1409	55.6	1407	55.6	4	<b>1221</b>	<b>64.2</b>	1220	64.2	1221	64.1
433.milc	4	1052	34.9	<b>1045</b>	<b>35.1</b>	1042	35.2	4	<b>1035</b>	<b>35.5</b>	1037	35.4	1033	35.6
434.zeusmp	4	835	43.6	839	43.4	<b>837</b>	<b>43.5</b>	4	<b>832</b>	<b>43.8</b>	829	43.9	834	43.6
435.gromacs	4	574	49.8	<b>573</b>	<b>49.8</b>	573	49.9	4	<b>502</b>	<b>56.9</b>	503	56.8	502	56.9
436.cactusADM	4	1009	47.4	<b>1014</b>	<b>47.1</b>	1015	47.1	4	<b>978</b>	<b>48.9</b>	<b>979</b>	<b>48.8</b>	980	48.8
437.leslie3d	4	1072	35.1	1062	35.4	<b>1064</b>	<b>35.3</b>	4	1072	35.1	1062	35.4	<b>1064</b>	<b>35.3</b>
444.namd	4	658	48.8	<b>658</b>	<b>48.8</b>	658	48.8	4	<b>642</b>	<b>50.0</b>	642	50.0	642	50.0
447.dealII	4	<b>648</b>	<b>70.6</b>	651	70.3	647	70.8	4	<b>561</b>	<b>81.6</b>	559	81.8	<b>565</b>	81.0
450.soplex	4	<b>1028</b>	<b>32.4</b>	1027	32.5	1032	32.3	4	900	37.1	<b>901</b>	<b>37.0</b>	902	37.0
453.povray	4	330	64.5	330	64.5	<b>330</b>	<b>64.5</b>	4	<b>297</b>	<b>71.7</b>	297	71.7	297	71.7
454.calculix	4	1115	29.6	1119	29.5	<b>1117</b>	<b>29.6</b>	4	<b>1066</b>	<b>31.0</b>	1066	31.0	1066	31.0
459.GemsFDTD	4	1358	31.2	1360	31.2	<b>1358</b>	<b>31.2</b>	4	1308	32.5	<b>1306</b>	<b>32.5</b>	1296	32.8
465.tonto	4	754	52.2	<b>750</b>	<b>52.5</b>	750	52.5	4	728	54.1	<b>730</b>	<b>54.0</b>	731	53.9
470.lbm	4	1695	32.4	<b>1651</b>	<b>33.3</b>	1644	33.4	4	1695	32.4	<b>1651</b>	<b>33.3</b>	1644	33.4
481.wrf	4	867	51.5	870	51.3	<b>869</b>	<b>51.4</b>	4	867	51.5	870	51.3	<b>869</b>	<b>51.4</b>
482.sphinx3	4	<b>1557</b>	<b>50.1</b>	1553	50.2	1560	50.0	4	<b>1540</b>	<b>50.6</b>	1541	50.6	1538	50.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind CPU(s) to processes  
Default BIOS settings was used.

This result was measured on the Sun Fire X4100 M2  
Sun Fire X4100 M2 and Sun Fire X4200 M2 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
pathcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4200 M2

**SPECfp\_rate2006 = 47.3**

**SPECfp\_rate\_base2006 = 44.9**

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Apr-2007

Hardware Availability: Oct-2006

Software Availability: Aug-2006

## Base Compiler Invocation (Continued)

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.games: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_TABLE\_WORKAROUND  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast

Fortran benchmarks:  
-Ofast

Benchmarks using both Fortran and C:  
-Ofast



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4200 M2

**SPECfp\_rate2006 = 47.3**  
**SPECfp\_rate\_base2006 = 44.9**

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Apr-2007

Hardware Availability: Oct-2006

Software Availability: Aug-2006

## Base Other Flags

C benchmarks:

-IPA:max\_jobs=4

C++ benchmarks:

-IPA:max\_jobs=4

Fortran benchmarks:

-IPA:max\_jobs=4

Benchmarks using both Fortran and C:

-IPA:max\_jobs=4

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_TABLE\_WORKAROUND  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Sun Microsystems**  
**Sun Fire X4200 M2**

**SPECfp\_rate2006 = 47.3**

**SPECfp\_rate\_base2006 = 44.9**

**CPU2006 license:** 6

**Test sponsor:** Sun Microsystems

**Tested by:** Sun Microsystems

**Test date:** Apr-2007

**Hardware Availability:** Oct-2006

**Software Availability:** Aug-2006

## Peak Optimization Flags

C benchmarks:

433.milc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

470.lbm: basepeak = yes

482.sphinx3: Same as 433.milc

C++ benchmarks:

444.namd: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

447.dealII: -Ofast -m32 -fno-exceptions

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:IEEE\_arith=3 -CG:load\_exe=0 -CG:movnti=1  
-LNO:minvariant=off -fno-exceptions

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-fast-math

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -OPT:IEEE\_arith=3 -LNO:blocking=off  
-LNO:ignore\_feedback=off

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O2  
-OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

434.zeusmp: -Ofast -CG:local\_fwd\_sched=on -LNO:blocking=off  
-LNO:interchange=off -LNO:fu=10 -LNO:full\_unroll\_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: -Ofast -CG:local\_fwd\_sched=on -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:prefetch\_ahead=5 -LNO:ou\_prod\_max=10 -LNO:full\_unroll=5  
-ipa

454.calculix: -Ofast -CG:prefetch=off -LNO:simd=0 -OPT:unroll\_times\_max=8  
-WOPT:mem\_opnds=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4200 M2

SPECfp\_rate2006 = 47.3  
SPECfp\_rate\_base2006 = 44.9

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Apr-2007

Hardware Availability: Oct-2006

Software Availability: Aug-2006

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=4

C++ benchmarks:

-IPA:max\_jobs=4

Fortran benchmarks:

-IPA:max\_jobs=4

Benchmarks using both Fortran and C:

-IPA:max\_jobs=4

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.30.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.30.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.30.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.30.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:19:33 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 May 2007.