



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL685c (AMD Opteron 8220)

**SPECint\_rate2006 = 101**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2007

Hardware Availability: Feb-2007

Software Availability: Apr-2007

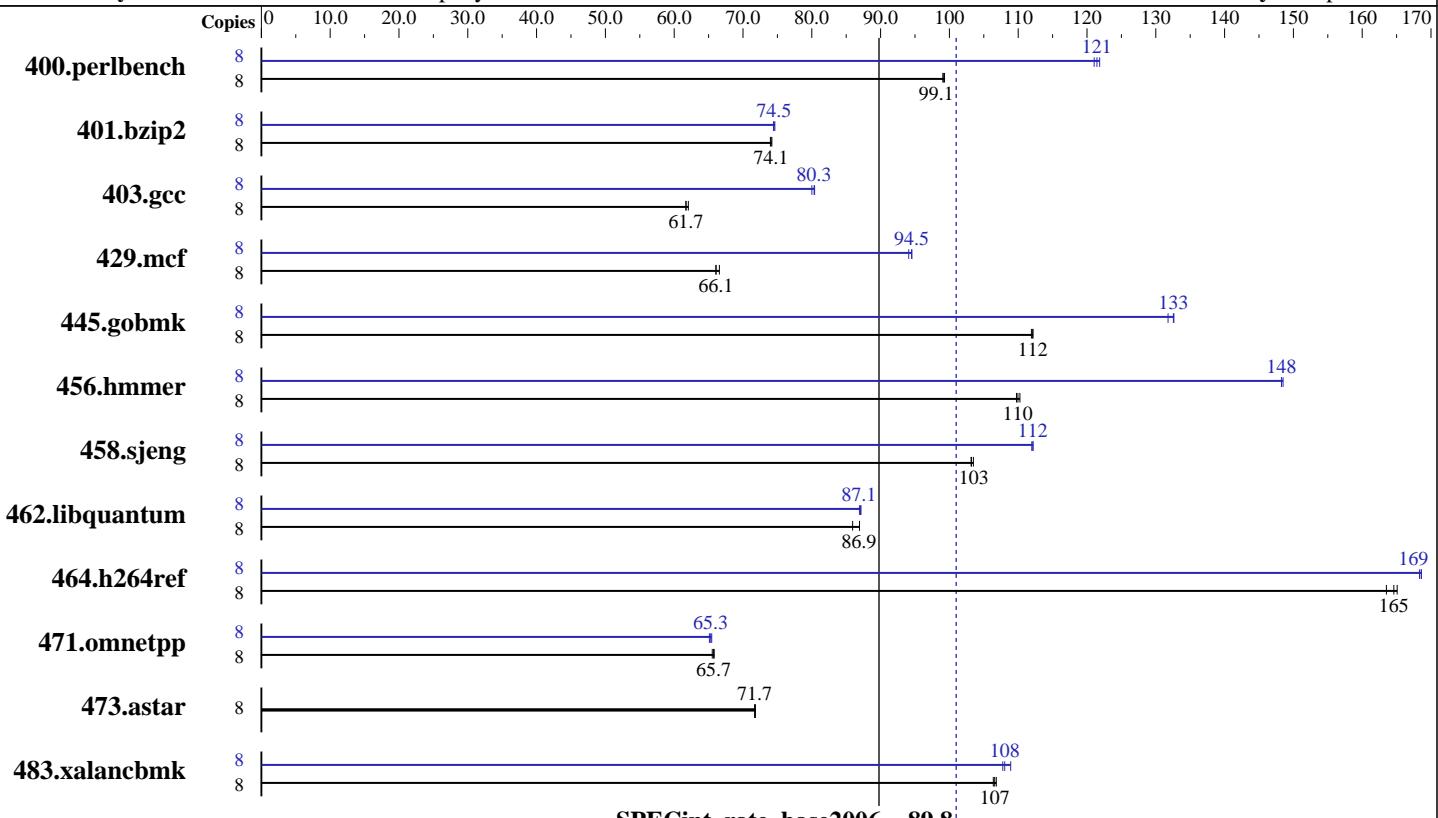

## Hardware

CPU Name: AMD Opteron 8220  
CPU Characteristics:  
CPU MHz: 2800  
FPU: Integrated  
CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
CPU(s) orderable: 2,4 chips  
Primary Cache: 64 KB I + 64 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: None  
Other Cache: None  
Memory: 32 GB (16x2 GB, PC2-5300P CL5)  
Disk Subsystem: 1 x 72 GB 10 K SAS  
Other Hardware: None

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64)  
2.6.16.21-0.8-smp  
Compiler: QLogic PathScale Compiler Suite, Release 3.0  
Auto Parallel: No  
File System: ext2  
System State: Multi-user, run level 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: SmartHeap 8.0 32 bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECint\_rate2006 = 101**

ProLiant BL685c (AMD Opteron 8220)

**SPECint\_rate\_base2006 = 89.8**

CPU2006 license: 3

Test date: Apr-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	787	99.3	789	99.1	<b>789</b>	<b>99.1</b>	8	646	121	641	122	<b>644</b>	<b>121</b>
401.bzip2	8	<b>1042</b>	<b>74.1</b>	1043	74.0	1041	74.2	8	1037	74.4	<b>1036</b>	<b>74.5</b>	1034	74.6
403.gcc	8	1038	62.1	<b>1044</b>	<b>61.7</b>	1044	61.7	8	801	80.4	805	80.0	<b>802</b>	<b>80.3</b>
429.mcf	8	1096	66.6	<b>1104</b>	<b>66.1</b>	1104	66.1	8	<b>772</b>	<b>94.5</b>	775	94.1	772	94.5
445.gobmk	8	748	112	<b>748</b>	<b>112</b>	750	112	8	633	133	<b>633</b>	<b>133</b>	637	132
456.hammer	8	680	110	677	110	<b>679</b>	<b>110</b>	8	503	149	503	148	<b>503</b>	<b>148</b>
458.sjeng	8	938	103	<b>938</b>	<b>103</b>	935	103	8	<b>863</b>	<b>112</b>	864	112	863	112
462.libquantum	8	1929	85.9	1907	86.9	<b>1907</b>	<b>86.9</b>	8	1907	86.9	<b>1903</b>	<b>87.1</b>	1902	87.1
464.h264ref	8	<b>1076</b>	<b>165</b>	1072	165	1083	164	8	<b>1050</b>	<b>169</b>	1050	169	1052	168
471.omnetpp	8	<b>761</b>	<b>65.7</b>	760	65.8	763	65.5	8	<b>766</b>	<b>65.3</b>	764	65.5	768	65.1
473.astar	8	783	71.7	<b>783</b>	<b>71.7</b>	782	71.8	8	<b>783</b>	71.7	<b>783</b>	<b>71.7</b>	782	71.8
483.xalancbmk	8	519	106	517	107	<b>518</b>	<b>107</b>	8	<b>511</b>	<b>108</b>	507	109	512	108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Node interleaving is disabled  
taskset utility used to bind CPU(s) to processes  
ulimit -s unlimited set

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL685c (AMD Opteron 8220)

**SPECint\_rate2006 = 101**

CPU2006 license: 3

Test date: Apr-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

## Base Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1

C++ benchmarks:

-Ofast -m32 -L/cpu2006/amd514K8.lib/32 -lsmartheap

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:opt=0

401.bzip2: -O3 -LNO:ou\_prod\_max=10 -OPT:Ofast -OPT:alias=disjoint

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:Ofast

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECint\_rate2006 = 101**

ProLiant BL685c (AMD Opteron 8220)

**SPECint\_rate\_base2006 = 89.8**

CPU2006 license: 3

Test date: Apr-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

## Peak Optimization Flags (Continued)

429.mcf: -m32 -O3 -ipa -L/cpu2006/amd514K8.lib/32 -lsmartheap

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off  
-WOPT:retype\_expr=on

456.hmmr: -O2 -OPT:alias=disjoint -OPT:malloc\_alg=1 -CG:cflow=0

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=50000 -IPA:pu\_reorder=2

462.libquantum: -O3 -ipa -CG:local\_fwd\_sched=on -IPA:space=1000

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -CG:gcm=off -m32  
-L/cpu2006/amd514K8.lib/32 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll\_times\_max=8  
-L/cpu2006/amd514K8.lib/32 -lsmartheap

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.16.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.16.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.16.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.16.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 12:16:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 May 2007.