



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = Not Run**

**IBM System x3650 (Intel Xeon X5450)**

**SPECint\_rate\_base2006 = 110**

**CPU2006 license:** 11


**Test date:** Jan-2008

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

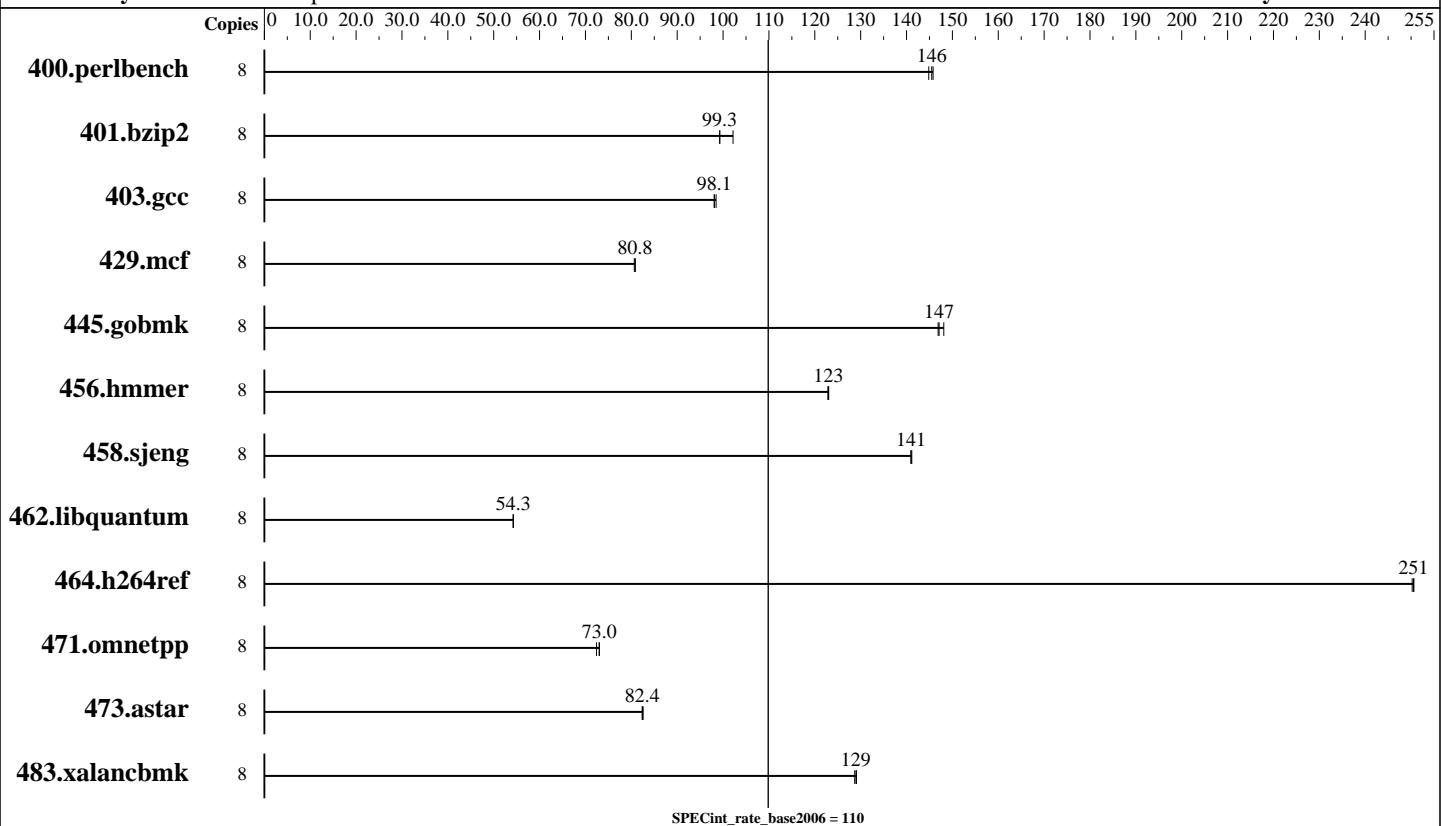

## Hardware

CPU Name: Intel Xeon X5450  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
 Disk Subsystem: 1 x 36 GB SAS, 15000 RPM  
 Other Hardware: None

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64), Kernel 2.6.16.21-0.8-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = Not Run**

IBM System x3650 (Intel Xeon X5450)

**SPECint\_rate\_base2006 = 110**

CPU2006 license: 11

Test date: Jan-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	536	146	540	145	<b>537</b>	<b>146</b>							
401.bzip2	8	778	99.3	756	102	<b>777</b>	<b>99.3</b>							
403.gcc	8	654	98.5	657	98.1	<b>656</b>	<b>98.1</b>							
429.mcf	8	902	80.8	905	80.6	<b>903</b>	<b>80.8</b>							
445.gobmk	8	<b>570</b>	<b>147</b>	571	147	567	148							
456.hammer	8	607	123	608	123	<b>607</b>	<b>123</b>							
458.sjeng	8	<b>687</b>	<b>141</b>	686	141	687	141							
462.libquantum	8	<b>3054</b>	<b>54.3</b>	3054	54.3	3056	54.2							
464.h264ref	8	706	251	<b>707</b>	<b>251</b>	707	250							
471.omnetpp	8	690	72.4	<b>685</b>	<b>73.0</b>	685	73.0							
473.astar	8	682	82.4	<b>681</b>	<b>82.4</b>	680	82.6							
483.xalancbmk	8	428	129	429	129	<b>428</b>	<b>129</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode

Hardware Sector Prefetch Disabled and Adjacent Sector Prefetch Disabled

Powersaved dameon was disabled in OS

taskset utility used to bind CPU(s) to processes

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = Not Run

IBM System x3650 (Intel Xeon X5450)

SPECint\_rate\_base2006 = 110

CPU2006 license: 11

Test date: Jan-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 16:20:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 February 2008.