



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 101

NovaScale R440 E1
(Intel Xeon E5405,2.00GHz)

SPECint_rate_base2006 = 83.3

CPU2006 license: 20


Test date: Jan-2008

Test sponsor: Bull SAS

Hardware Availability: Dec-2007

Tested by: NEC Corporation

Software Availability: Nov-2007

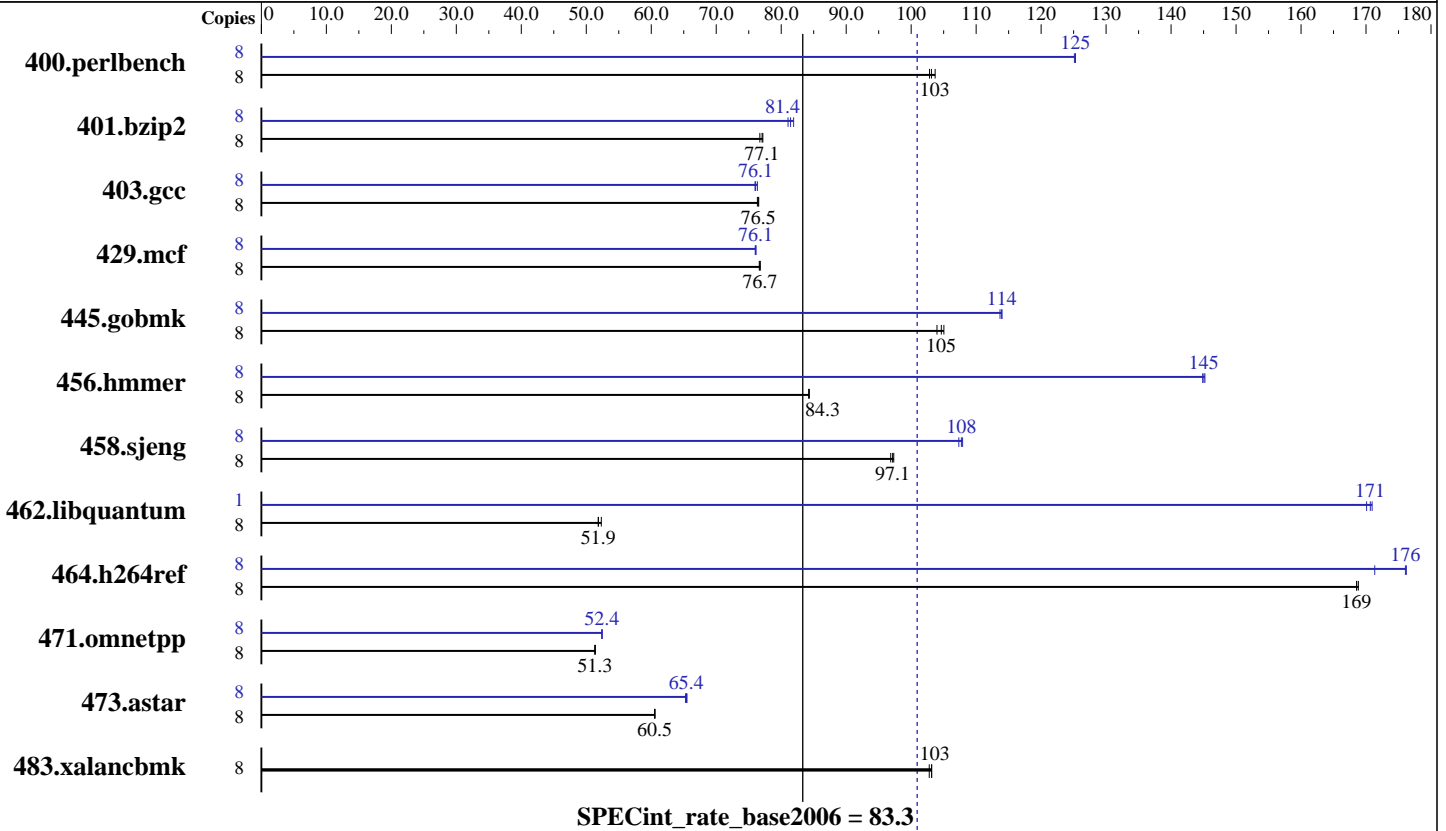

Hardware

CPU Name: Intel Xeon E5405
 CPU Characteristics: 2.00 GHz, 2x6 MB L2 shared, 1333 MHz bus
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x73.2 GB SAS, 15000RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: L_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap library 8.1
 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E1
(Intel Xeon E5405,2.00GHz)

SPECint_rate2006 = 101

SPECint_rate_base2006 = 83.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	760	103	758	103	754	104	8	624	125	625	125	624	125
401.bzip2	8	1006	76.7	1002	77.1	1000	77.2	8	952	81.1	948	81.4	942	81.9
403.gcc	8	841	76.5	844	76.3	842	76.5	8	844	76.3	848	76.0	847	76.1
429.mcf	8	950	76.8	952	76.6	951	76.7	8	959	76.1	958	76.1	960	76.0
445.gobmk	8	799	105	807	104	802	105	8	736	114	737	114	738	114
456.hmmer	8	886	84.3	885	84.3	886	84.2	8	515	145	515	145	514	145
458.sjeng	8	995	97.3	996	97.1	999	96.9	8	897	108	902	107	899	108
462.libquantum	8	3169	52.3	3195	51.9	3198	51.8	1	121	171	122	170	121	171
464.h264ref	8	1050	169	1049	169	1050	169	8	1006	176	1033	171	1005	176
471.omnetpp	8	973	51.4	974	51.3	974	51.3	8	954	52.4	953	52.4	954	52.4
473.astar	8	927	60.6	928	60.5	928	60.5	8	858	65.4	860	65.3	857	65.5
483.xalancbmk	8	535	103	535	103	537	103	8	535	103	535	103	537	103

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default).

Platform Notes

Bios settings:
Intel SpeedStep Technology: Disabled

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2,
456.hmmer, for peak, are compiled in 64-bit mode

The NEC Express5800/120Rh-1(Intel Xeon Processor E5405),
the NEC Express5800/120Rj-2(Intel Xeon Processor E5405),
the Bull NovaScale R440 E1 (Intel Xeon E5405,2.00GHz) and
the Bull NovaScale R460 E1 (Intel Xeon E5405,2.00GHz) models are electronically equivalent.
The results have been measured on a NEC Express5800/120Rj-2(Intel Xeon Processor E5405) model.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E1
(Intel Xeon E5405,2.00GHz)

SPECint_rate2006 = 101

SPECint_rate_base2006 = 83.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3
C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc
401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E1
(Intel Xeon E5405,2.00GHz)

SPECint_rate2006 = 101

SPECint_rate_base2006 = 83.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
403.gcc: -fast -inline-calloc -opt-malloc-options=3
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440 E1
(Intel Xeon E5405,2.00GHz)

SPECint_rate2006 = 101

SPECint_rate_base2006 = 83.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:14:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 April 2008.