



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®2006 = 18.6**

IBM BladeCenter HS12 (Intel Xeon X3323)

**SPECfp\_base2006 = 17.2**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2008

Hardware Availability: May-2008

Software Availability: Nov-2007

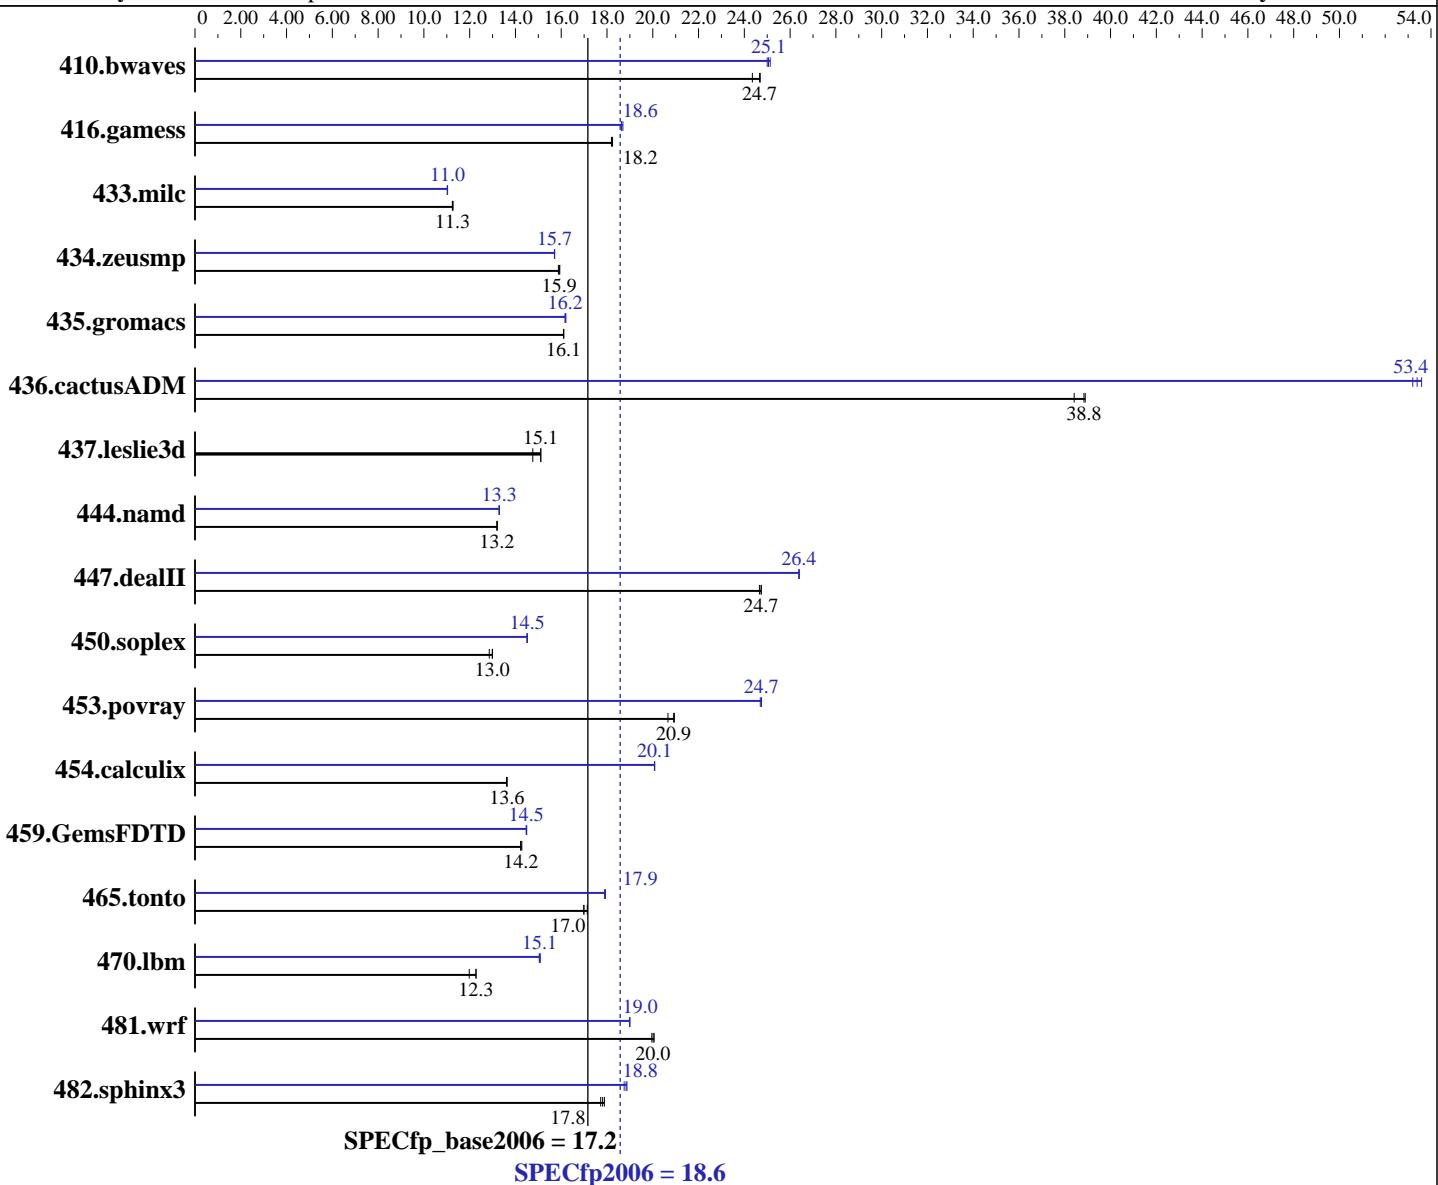

## Hardware

CPU Name: Intel Xeon X3323  
CPU Characteristics: 1333MHz system bus  
CPU MHz: 2500  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 6 MB I+D on chip per chip, 3 MB shared / 2 cores

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: 1\_cc\_p\_10.1.008, l\_fc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Multi-user, run level 3  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp2006 = 18.6**

**IBM BladeCenter HS12 (Intel Xeon X3323)**

**SPECfp\_base2006 = 17.2**

**CPU2006 license:** 11

**Test date:** May-2008

**Test sponsor:** IBM Corporation

**Hardware Availability:** May-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4 x 2 GB DDR2-5300 ECC)  
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.17.50.0.15

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	558	24.4	<b>551</b>	<b>24.7</b>	550	24.7	<b>542</b>	<b>25.1</b>	544	25.0	541	25.1
416.gamess	<b>1075</b>	<b>18.2</b>	1076	18.2	1073	18.2	1047	18.7	<b>1050</b>	<b>18.6</b>	1051	18.6
433.milc	817	11.2	<b>815</b>	<b>11.3</b>	814	11.3	<b>832</b>	<b>11.0</b>	833	11.0	832	11.0
434.zeusmp	573	15.9	571	15.9	<b>572</b>	<b>15.9</b>	<b>579</b>	<b>15.7</b>	579	15.7	580	15.7
435.gromacs	444	16.1	<b>443</b>	<b>16.1</b>	443	16.1	442	16.2	<b>441</b>	<b>16.2</b>	441	16.2
436.cactusADM	311	38.4	<b>308</b>	<b>38.8</b>	307	38.9	225	53.2	<b>224</b>	<b>53.4</b>	223	53.6
437.leslie3d	637	14.8	<b>622</b>	<b>15.1</b>	622	15.1	637	14.8	<b>622</b>	<b>15.1</b>	622	15.1
444.namd	608	13.2	608	13.2	<b>608</b>	<b>13.2</b>	603	13.3	<b>603</b>	<b>13.3</b>	604	13.3
447.dealII	464	24.7	<b>463</b>	<b>24.7</b>	462	24.7	434	26.4	433	26.4	<b>434</b>	<b>26.4</b>
450.soplex	649	12.9	<b>642</b>	<b>13.0</b>	642	13.0	<b>574</b>	<b>14.5</b>	574	14.5	<b>575</b>	<b>14.5</b>
453.povray	<b>254</b>	<b>20.9</b>	257	20.7	254	20.9	<b>215</b>	<b>24.7</b>	215	24.8	215	24.7
454.calculix	605	13.6	<b>605</b>	<b>13.6</b>	606	13.6	411	20.1	411	20.1	<b>411</b>	<b>20.1</b>
459.GemsFDTD	743	14.3	746	14.2	<b>745</b>	<b>14.2</b>	<b>733</b>	<b>14.5</b>	732	14.5	733	14.5
465.tonto	574	17.1	579	17.0	<b>579</b>	<b>17.0</b>	<b>549</b>	<b>17.9</b>	549	17.9	550	17.9
470.lbm	1147	12.0	<b>1119</b>	<b>12.3</b>	1119	12.3	914	15.0	911	15.1	<b>912</b>	<b>15.1</b>
481.wrf	560	20.0	557	20.1	<b>558</b>	<b>20.0</b>	588	19.0	<b>588</b>	<b>19.0</b>	589	19.0
482.sphinx3	1100	17.7	<b>1094</b>	<b>17.8</b>	1090	17.9	<b>1033</b>	<b>18.9</b>	<b>1035</b>	<b>18.8</b>	1039	18.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 64-bit mode except 450.soplex,  
 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode  
 Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Enabled  
 OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to physical,0  
 KMP\_STACKSIZE set to 200M

## Base Compiler Invocation

C benchmarks:  
 icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 18.6**

IBM BladeCenter HS12 (Intel Xeon X3323)

**SPECfp\_base2006 = 17.2**

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.games: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 18.6**

IBM BladeCenter HS12 (Intel Xeon X3323)

**SPECfp\_base2006 = 17.2**

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icc ifort
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	<b>SPECfp2006 =</b>	<b>18.6</b>
IBM BladeCenter HS12 (Intel Xeon X3323)	<b>SPECfp_base2006 =</b>	<b>17.2</b>
<b>CPU2006 license:</b> 11	<b>Test date:</b>	May-2008
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b>	May-2008
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b>	Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revC.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revC.20090713.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 18.6

IBM BladeCenter HS12 (Intel Xeon X3323)

SPECfp\_base2006 = 17.2

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 17:32:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 June 2008.