



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems Sun Fire X4440

**SPECint®2006 = 13.5**  
**SPECint\_base2006 = 11.7**

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

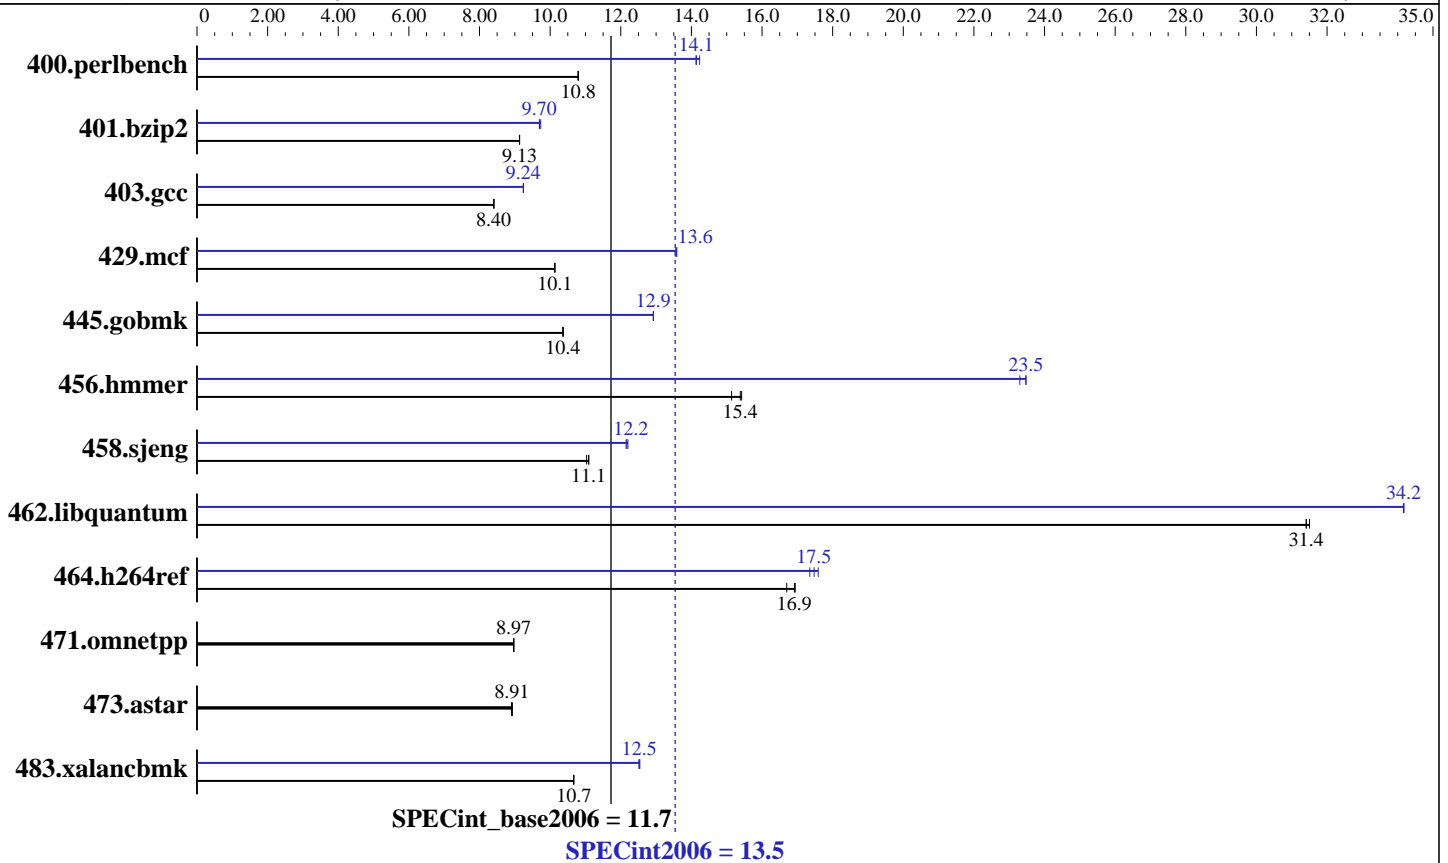

### Hardware

CPU Name: AMD Opteron 8356  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: SAS, 72 GB, 10 K RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2  
 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ext3  
 System State: Runlevel 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4440

SPECint2006 = 13.5  
SPECint\_base2006 = 11.7

CPU2006 license: 6  
Test sponsor: Sun Microsystems  
Tested by: Sun Microsystems

Test date: May-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	906	10.8	904	10.8	<u>905</u>	<u>10.8</u>	686	14.2	691	14.1	<u>691</u>	<u>14.1</u>
401.bzip2	1056	9.14	<u>1056</u>	<u>9.13</u>	1057	9.13	<u>995</u>	<u>9.70</u>	995	9.69	991	9.73
403.gcc	958	8.40	<u>958</u>	<u>8.40</u>	957	8.41	871	9.24	871	9.25	<u>871</u>	<u>9.24</u>
429.mcf	<u>900</u>	<u>10.1</u>	900	10.1	900	10.1	672	13.6	<u>672</u>	<u>13.6</u>	671	13.6
445.gobmk	1012	10.4	1013	10.4	<u>1012</u>	<u>10.4</u>	811	12.9	812	12.9	<u>812</u>	<u>12.9</u>
456.hammer	616	15.1	605	15.4	<u>606</u>	<u>15.4</u>	<u>398</u>	<u>23.5</u>	397	23.5	400	23.3
458.sjeng	<u>1091</u>	<u>11.1</u>	1091	11.1	1097	11.0	<u>994</u>	<u>12.2</u>	992	12.2	996	12.2
462.libquantum	660	31.4	<u>660</u>	<u>31.4</u>	658	31.5	606	34.2	<u>606</u>	<u>34.2</u>	607	34.2
464.h264ref	1306	16.9	1325	16.7	<u>1308</u>	<u>16.9</u>	<u>1266</u>	<u>17.5</u>	1258	17.6	1275	17.4
471.omnetpp	697	8.97	697	8.97	<u>697</u>	<u>8.97</u>	697	8.97	697	8.97	<u>697</u>	<u>8.97</u>
473.astar	788	8.90	<u>787</u>	<u>8.91</u>	786	8.93	788	8.90	<u>787</u>	<u>8.91</u>	786	8.93
483.xalancbmk	647	10.7	647	10.7	<u>647</u>	<u>10.7</u>	<u>551</u>	<u>12.5</u>	551	12.5	550	12.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 4915200' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=2400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## Platform Notes

Default BIOS settings were used.

## Base Compiler Invocation

C benchmarks:  
pgcc  
C++ benchmarks:  
pgcpp

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4440

SPECint2006 = 13.5  
SPECint\_base2006 = 11.7

CPU2006 license: 6  
Test sponsor: Sun Microsystems  
Tested by: Sun Microsystems

Test date: May-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Base Portability Flags (Continued)

403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 --zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4440

SPECint2006 = 13.5  
SPECint\_base2006 = 11.7

CPU2006 license: 6  
Test sponsor: Sun Microsystems  
Tested by: Sun Microsystems

Test date: May-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
-WOPT:if\_conv=0 -CG:local\_sched\_alg=1  
  
401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4  
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64  
-Bstatic\_pgi  
  
403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast  
  
429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1  
-Msmartalloc=huge:150 -tp barcelona -Bstatic\_pgi  
  
445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0  
-CG:p2align=on  
  
456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed  
-Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const  
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64  
-Bstatic\_pgi  
  
458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)  
-fastsse -Msmartalloc=huge:150 -Mfprelaxed  
-tp barcelona-64 -Bstatic\_pgi  
  
462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8  
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg  
-tp barcelona-64 -Bstatic\_pgi  
  
464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150  
-Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems  
Sun Fire X4440

SPECint2006 = 13.5  
SPECint\_base2006 = 11.7

CPU2006 license: 6  
Test sponsor: Sun Microsystems  
Tested by: Sun Microsystems

Test date: May-2008  
Hardware Availability: May-2008  
Software Availability: May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes  
473.astar: basepeak = yes  
483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used  
403.gcc: No flags used  
445.gobmk: No flags used

C++ benchmarks (except as noted below):

-w

483.xalancbmk: -L/root/work/cpu2006/amd123GH.libs/32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 17:24:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 June 2008.