



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

**SPECint®\_rate2006 = 301**

Fujitsu SPARC Enterprise T5440

**SPECint\_rate\_base2006 = 270**

CPU2006 license: 19


**Test date:** Jul-2008

**Test sponsor:** Fujitsu Limited

**Hardware Availability:** Oct-2008

**Tested by:** Sun Microsystems

**Software Availability:** Jul-2008

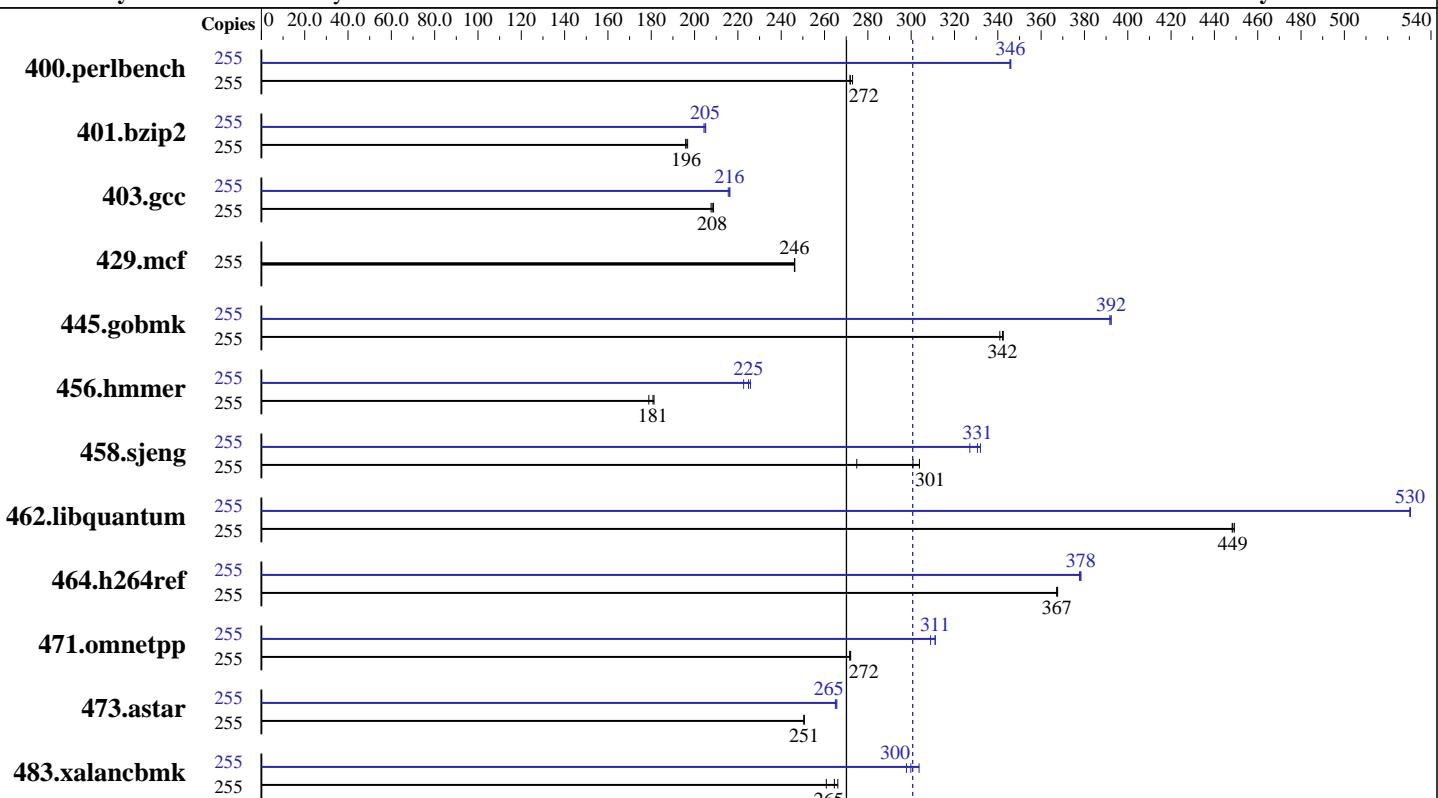

**SPECint\_rate\_base2006 = 270**

**SPECint\_rate2006 = 301**

## Hardware

CPU Name: UltraSPARC T2 Plus  
CPU Characteristics:  
CPU MHz: 1414  
FPU: Integrated  
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 8 threads/core  
CPU(s) orderable: 1 to 4 chips  
Primary Cache: 16 KB I + 8 KB D on chip per core  
Secondary Cache: 4 MB I+D on chip per chip  
L3 Cache: None  
Other Cache: None  
Memory: 256 GB (64 x 4 GB)  
Disk Subsystem: 975 GB RAID 5 using Sun StoreEdge 6140 with 12x 300 GB 10K RPM disks  
2 Gbps Fibre Channel  
Other Hardware: None

## Software

Operating System: Solaris 10 5/08 + patch 137111-03  
Compiler: Sun Studio 12 and gccfss V4.2.0 (see additional detail below)  
Auto Parallel: No  
File System: ufs  
System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

**SPECint\_rate2006 = 301**

Fujitsu SPARC Enterprise T5440

**SPECint\_rate\_base2006 = 270**

CPU2006 license: 19

Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Oct-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	255	9128	273	9166	272	<b>9165</b>	<b>272</b>	255	7201	346	<b>7202</b>	<b>346</b>	7209	346
401.bzip2	255	12562	196	12504	197	<b>12549</b>	<b>196</b>	255	11995	205	<b>12012</b>	<b>205</b>	12043	204
403.gcc	255	9887	208	9833	209	<b>9862</b>	<b>208</b>	255	9492	216	<b>9495</b>	<b>216</b>	9523	216
429.mcf	255	9445	246	9450	246	<b>9446</b>	<b>246</b>	255	9445	246	9450	246	<b>9446</b>	<b>246</b>
445.gobmk	255	7846	341	7809	343	<b>7818</b>	<b>342</b>	255	<b>6819</b>	<b>392</b>	6829	392	6819	392
456.hmmer	255	13301	179	13124	181	<b>13159</b>	<b>181</b>	255	10686	223	<b>10579</b>	<b>225</b>	10537	226
458.sjeng	255	10156	304	11225	275	<b>10257</b>	<b>301</b>	255	<b>9333</b>	<b>331</b>	9434	327	9294	332
462.libquantum	255	11788	448	<b>11780</b>	<b>449</b>	11762	449	255	<b>9961</b>	<b>530</b>	9964	530	9960	530
464.h264ref	255	<b>15363</b>	<b>367</b>	15350	368	15368	367	255	<b>14917</b>	<b>378</b>	14916	378	14939	378
471.omnetpp	255	5858	272	<b>5865</b>	<b>272</b>	5867	272	255	<b>5158</b>	309	5122	311	<b>5124</b>	<b>311</b>
473.astar	255	7143	251	7145	251	<b>7145</b>	<b>251</b>	255	<b>6746</b>	<b>265</b>	6755	265	6738	266
483.xalancbmk	255	<b>6651</b>	<b>265</b>	6611	266	6746	261	255	<b>5794</b>	304	5908	298	<b>5868</b>	<b>300</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

Sun Studio compiler patches are available at  
[http://developers.sun.com/sunstudio/downloads/patches/ss12\\_patches.jsp](http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp)  
The tested configuration included patch 124867-02, 124861-04,  
124863-01, 127000-01

Peak also uses "GCC for SPARC Systems", which combines gcc  
with the Sun Code Generator for SPARC systems. It is invoked  
as "gcc", and accepts source code compatible with GCC 4.2.  
For more information, including support, see  
<http://cooltools.sunsource.net/gcc/>

## Submit Notes

The config file option 'submit' was used. Processes were  
bound to cores using "submit" and "pbind".

A processor set was created using

psrset -c 1-255

and the runspec process was placed into the set using  
psrset -e 1

## Operating System Notes

ulimit -s 131072 was used to allow the stack to grow  
up to 131072 KB (aka 128 MB). Note that saying "131072"  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

**SPECint\_rate2006 = 301**

Fujitsu SPARC Enterprise T5440

**SPECint\_rate\_base2006 = 270**

CPU2006 license: 19

**Test date:** Jul-2008

Test sponsor: Fujitsu Limited

**Hardware Availability:** Oct-2008

Tested by: Sun Microsystems

**Software Availability:** Jul-2008

## Operating System Notes (Continued)

is preferable to "unlimited", because there is a tradeoff between space for the stack vs. space for the heap.

ulimit -n 1300, set the open file limit

/etc/system parameters

autoup=600

Causes pages older than the listed number of seconds to be written by fsflush.

bufhwm=3000

Memory byte limit for caching I/O buffers

segmap\_percent=1

Set maximum percent memory for file system cache

tune\_t\_fsflushr=10

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

tsb\_rss\_factor=128

Suggests that the size of the TSB (Translation Storage Buffer) may be increased if it is more than 25% (128/512) full. Doing so may reduce TSB traps, at the cost of additional kernel memory.

The "webconsole" service was turned off using  
svcadm disable webconsole

The system had 409 GB of swap space.

## Platform Notes

This result is measured on a Sun SPARC Enterprise T5440 Server.  
Note that the Sun SPARC Enterprise T5440 and Fujitsu SPARC Enterprise T5440 are electrically equivalent.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC  
403.gcc: -DSPEC\_CPU\_SOLARIS

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

**SPECint\_rate2006 = 301**

Fujitsu SPARC Enterprise T5440

**SPECint\_rate\_base2006 = 270**

CPU2006 license: 19

Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Oct-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

## Base Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_SOLARIS  
483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Base Optimization Flags

C benchmarks:

```
-g -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto -xalias_level=std  
-M /usr/lib/ld/map.bssalign
```

C++ benchmarks:

```
-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto  
-xdepend -xalias_level=compatible -M /usr/lib/ld/map.bssalign
```

## Base Other Flags

C benchmarks:

```
-xjobs=32 -V -#
```

C++ benchmarks:

```
-xjobs=32 -verbose=diags,version
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

cc

403.gcc: gcc

456.hmmer: gcc

462.libquantum: gcc

C++ benchmarks (except as noted below):

CC

471.omnetpp: g++

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC

462.libquantum: -DSPEC\_CPU\_SOLARIS -DSPEC\_CPU\_NEED\_COMPLEX\_I

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint\_rate2006 = 301

Fujitsu SPARC Enterprise T5440

SPECint\_rate\_base2006 = 270

CPU2006 license: 19

Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Oct-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -g -xprofile=collect:./feedback(pass 1)
               -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
               -xprefetch=no%auto -M /usr/lib/ld/map.bssalign
               -xalias_level=std -xi0=2 -Xc -xrestrict -lfast
```

```
401.bzip2: -g -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -M /usr/lib/ld/map.bssalign -xalias_level=strong
```

```
403.gcc: -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
          -xprefetch=no%auto -Wl,-M,/usr/lib/ld/map.bssalign -xi0=2
          -xalias_level=std
```

429.mcf: basepeak = yes

```
445.gobmk: -g -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
            -xprefetch=no%auto -M /usr/lib/ld/map.bssalign
            -xalias_level=std -xrestrict
```

```
456.hammer: -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
             -Wl,-M,/usr/lib/ld/map.bssalign -xi0=2 -xalias_level=std
```

```
458.sjeng: -g -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
            -xprefetch=no%auto -M /usr/lib/ld/map.bssalign -xi0=2
```

462.libquantum: -fast -Wl,-M,/usr/lib/ld/map.bssalign -xi0=2

```
464.h264ref: -g -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
              -xprefetch=no%auto -M /usr/lib/ld/map.bssalign -xi0=2
              -xalias_level=std
```

C++ benchmarks:

```
471.omnetpp: -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
              -Wl,-M,/usr/lib/ld/map.bssalign -xi0=2 -xalias_level=std
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

**SPECint\_rate2006 = 301**

Fujitsu SPARC Enterprise T5440

**SPECint\_rate\_base2006 = 270**

CPU2006 license: 19

**Test date:** Jul-2008

Test sponsor: Fujitsu Limited

**Hardware Availability:** Oct-2008

Tested by: Sun Microsystems

**Software Availability:** Jul-2008

## Peak Optimization Flags (Continued)

```
473.astar: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xpagesize_heap=4M
           -xpagesize_stack=64K -xprefetch=no%auto -xdepend
           -xalias_level=compatible -M /usr/lib/ld/map.bssalign
           -xipo=2 -xarch=v8plusb -lfast -lbsdmalloc
```

```
483.xalancbmk: -g0 -library=stlport4 -fast -xpagesize=4M
                -xprefetch=no%auto -xdepend -xalias_level=compatible
                -M /usr/lib/ld/map.bssalign -xipo=2 -lfast
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-xjobs=32 -V -#
```

```
403.gcc: -v
```

```
456.hmmr: -v
```

```
462.libquantum: -v
```

C++ benchmarks (except as noted below):

```
-xjobs=32 -verbose=diags,version
```

```
471.omnetpp: -v
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:17:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 October 2008.