



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 211

PowerEdge R905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 188

CPU2006 license: 55


Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

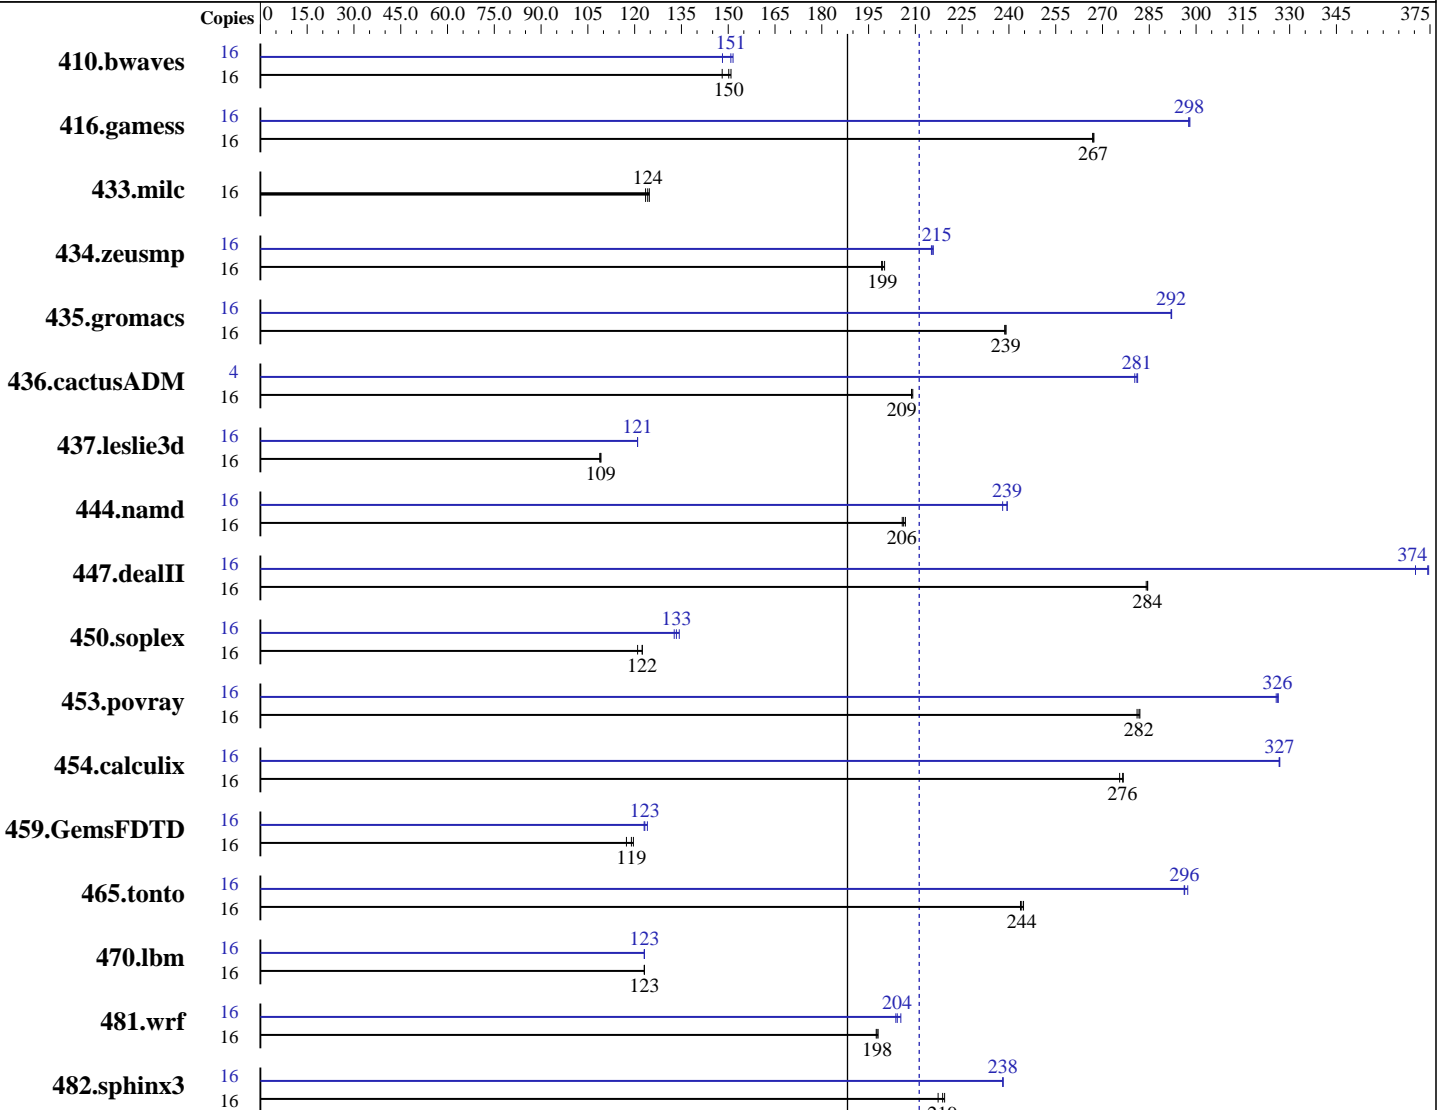

SPECfp\_rate\_base2006 = 188

SPECfp\_rate2006 = 211

### Hardware

CPU Name: AMD Opteron 8384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 211

PowerEdge R905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 188

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (16 x 4 GB DDR2-800)  
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
Other Hardware: None

Other Software: binutils 2.18  
32-bit and 64-bit libhugetlbfs libraries

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1469	148	<b><u>1448</u></b>	<b><u>150</u></b>	1441	151	16	<b><u>1441</u></b>	<b><u>151</u></b>	1468	148	1435	152
416.gamess	16	1172	267	<b><u>1173</u></b>	<b><u>267</u></b>	1174	267	16	1053	298	<b><u>1052</u></b>	<b><u>298</u></b>	1051	298
433.milc	16	<b><u>1183</u></b>	<b><u>124</u></b>	1189	124	1178	125	16	<b><u>1183</u></b>	<b><u>124</u></b>	1189	124	1178	125
434.zeusmp	16	<b><u>730</u></b>	<b><u>199</u></b>	731	199	728	200	16	<b><u>676</u></b>	<b><u>215</u></b>	675	216	677	215
435.gromacs	16	478	239	<b><u>478</u></b>	<b><u>239</u></b>	479	239	16	<b><u>391</u></b>	<b><u>292</u></b>	391	292	391	292
436.cactusADM	16	916	209	<b><u>916</u></b>	<b><u>209</u></b>	914	209	4	170	281	171	280	<b><u>170</u></b>	<b><u>281</u></b>
437.leslie3d	16	<b><u>1378</u></b>	<b><u>109</u></b>	1378	109	1382	109	16	<b><u>1244</u></b>	<b><u>121</u></b>	1244	121	1244	121
444.namd	16	624	206	<b><u>622</u></b>	<b><u>206</u></b>	620	207	16	539	238	536	239	<b><u>536</u></b>	<b><u>239</u></b>
447.dealII	16	<b><u>643</u></b>	<b><u>284</u></b>	643	284	644	284	16	489	375	494	370	<b><u>489</u></b>	<b><u>374</u></b>
450.soplex	16	1103	121	1090	122	<b><u>1090</u></b>	<b><u>122</u></b>	16	1006	133	<b><u>1000</u></b>	<b><u>133</u></b>	994	134
453.povray	16	302	282	<b><u>302</u></b>	<b><u>282</u></b>	303	281	16	<b><u>261</u></b>	<b><u>326</u></b>	261	326	261	326
454.calculix	16	<b><u>477</u></b>	<b><u>276</u></b>	479	275	477	277	16	404	327	404	327	<b><u>404</u></b>	<b><u>327</u></b>
459.GemsFDTD	16	<b><u>1427</u></b>	<b><u>119</u></b>	1446	117	1419	120	16	<b><u>1377</u></b>	<b><u>123</u></b>	1380	123	1368	124
465.tonto	16	<b><u>645</u></b>	<b><u>244</u></b>	643	245	646	244	16	530	297	<b><u>531</u></b>	<b><u>296</u></b>	532	296
470.lbm	16	<b><u>1786</u></b>	<b><u>123</u></b>	1786	123	1786	123	16	1786	123	<b><u>1786</u></b>	<b><u>123</u></b>	1785	123
481.wrf	16	902	198	905	197	<b><u>904</u></b>	<b><u>198</u></b>	16	870	205	877	204	<b><u>875</u></b>	<b><u>204</u></b>
482.sphinx3	16	<b><u>1426</u></b>	<b><u>219</u></b>	1435	217	1421	219	16	<b><u>1310</u></b>	<b><u>238</u></b>	1310	238	1310	238

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores

## Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 211

PowerEdge R905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 188

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_MORECORE = "yes"

LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"

NCPUS = "4"

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deall: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 211

PowerEdge R905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 188

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Base Optimization Flags (Continued)

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 211

PowerEdge R905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 188

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse  
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk  
-Mfprelaxed --zc\_eh -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 211

PowerEdge R905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 188

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-fno-exceptions -m32

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3  
-INLINE:aggressive=on -OPT:IEEE\_arith=3  
-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
-OPT:malloc\_alg=1 -CG:load\_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc  
-Mprefetch=nta -Mfpelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfpelaxed  
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge  
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse  
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0  
-Mfpelaxed -tp barcelona-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:prefer\_lru\_reg=off  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

### Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 211

PowerEdge R905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 188

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur  
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64  
-Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-OPT:malloc\_alg=1 -m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 211

PowerEdge R905 (AMD Opteron 8384, 2.70 GHz)

SPECfp\_rate\_base2006 = 188

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090713.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090713.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 20:28:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 November 2008.