



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint®_rate2006 = 258

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016


Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

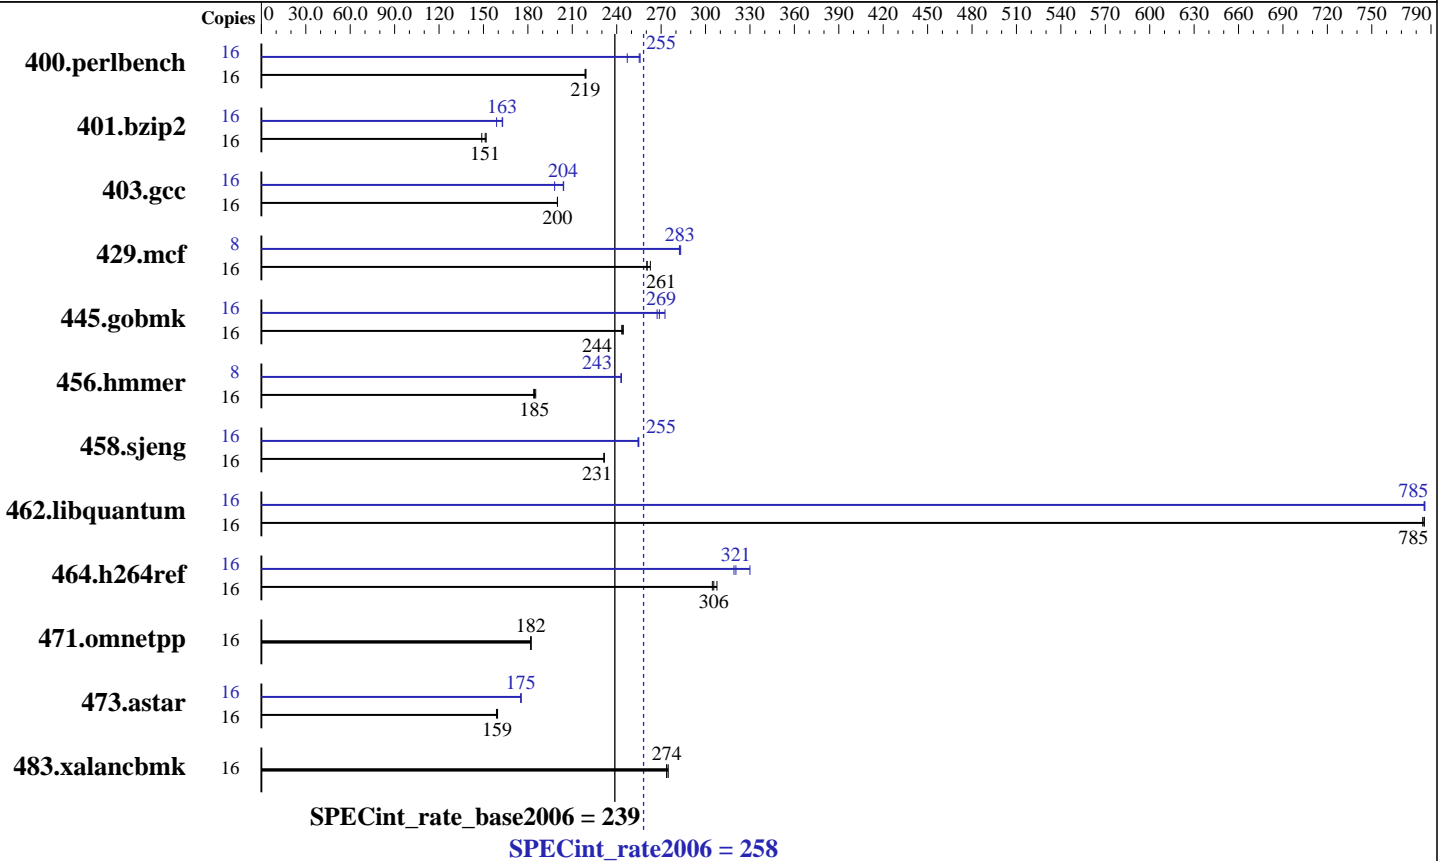

Hardware

CPU Name: Intel Xeon X5570
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 X 4 GB PC3-10600R, CL=9)
 Disk Subsystem: Seagate ST3500830AS 500GB SATAII, 7200RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2
 Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 258

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	713	219	715	219	714	219	16	633	247	613	255	611	256
401.bzip2	16	1017	152	1021	151	1037	149	16	972	159	949	163	947	163
403.gcc	16	644	200	644	200	644	200	16	631	204	632	204	650	198
429.mcf	16	555	263	560	260	560	261	8	258	283	258	283	258	282
445.gobmk	16	687	244	688	244	690	243	16	616	273	628	267	624	269
456.hammer	16	809	185	812	184	806	185	8	307	243	307	243	307	243
458.sjeng	16	836	231	836	232	836	231	16	761	254	760	255	759	255
462.libquantum	16	423	784	422	785	422	785	16	422	785	422	786	422	785
464.h264ref	16	1162	305	1151	308	1159	306	16	1073	330	1109	319	1105	321
471.omnetpp	16	549	182	549	182	549	182	16	549	182	549	182	549	182
473.astar	16	704	160	707	159	705	159	16	641	175	640	175	641	175
483.xalancbmk	16	402	275	403	274	403	274	16	402	275	403	274	403	274

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS setting:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Enabled
Tested system case compliance with Intel ATX spec
450W or higher ATX Power Supply (dual 12V/18A output), 500W or higher SSI Power Supply
System was configured with ASPEED AST2050 VGA (on board VGA)

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 258

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 258

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3
429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 258

ASUS Z8NA-D6 server motherboard (Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:56:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2009.