



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = Not Run

ProLiant DL580 G5
(2.66 GHz, Intel Xeon X7460)

SPECint_rate_base2006 = 268

CPU2006 license: 3


Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

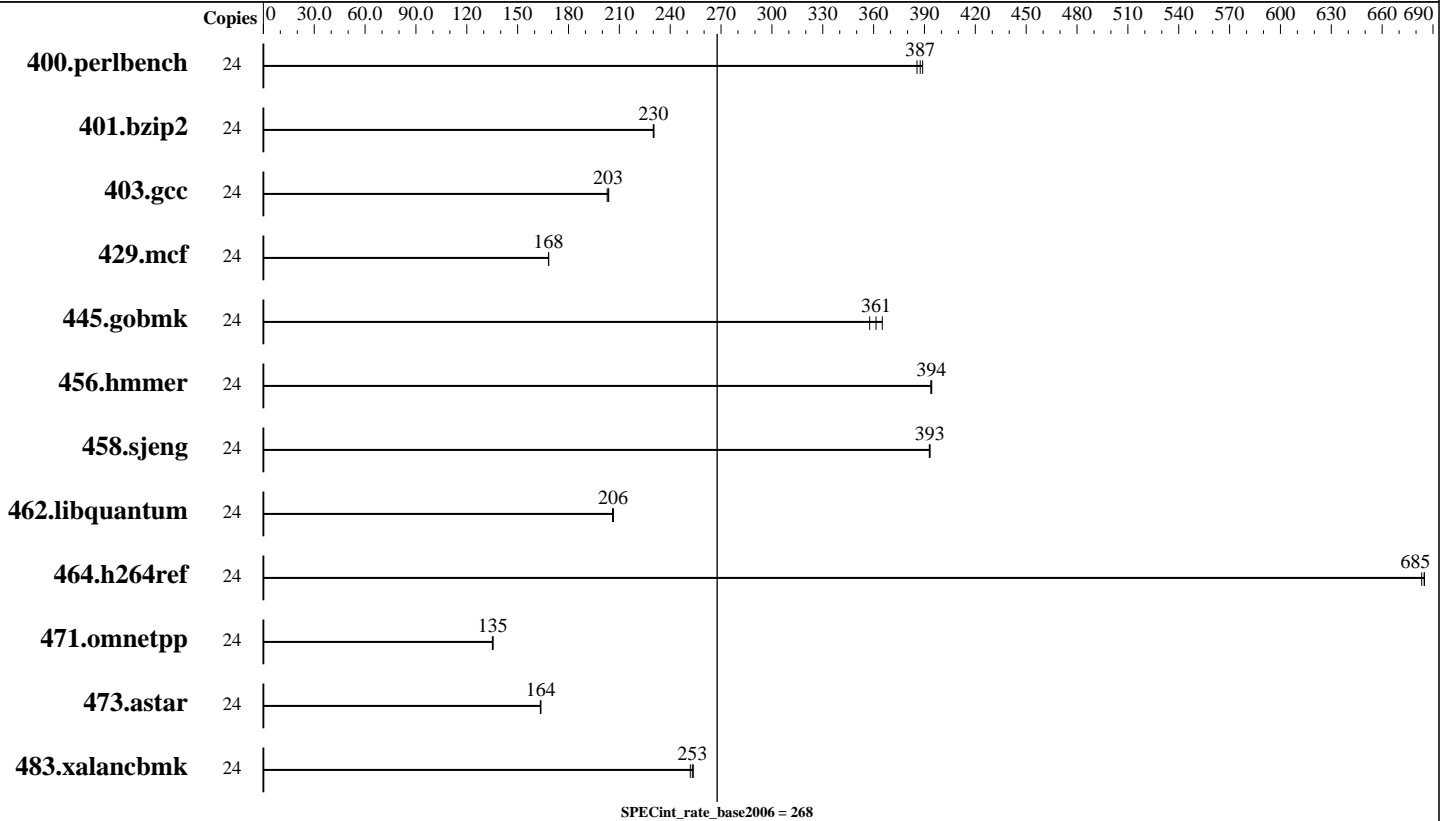

Hardware

CPU Name: Intel Xeon X7460
 CPU Characteristics: 2.66 GHz, 16 MB L3 shared, 1333 MHz system bus
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4 GB PC2-5300F CL5)
 Disk Subsystem: 1x146GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.12-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G5
(2.66 GHz, Intel Xeon X7460)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 268

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2009
Hardware Availability: Sep-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<u>605</u>	<u>387</u>	603	389	608	386							
401.bzip2	24	1005	230	<u>1006</u>	<u>230</u>	1007	230							
403.gcc	24	953	203	<u>950</u>	<u>203</u>	948	204							
429.mcf	24	1300	168	<u>1301</u>	<u>168</u>	1302	168							
445.gobmk	24	<u>697</u>	<u>361</u>	704	358	690	365							
456.hammer	24	<u>568</u>	<u>394</u>	569	394	568	394							
458.sjeng	24	<u>739</u>	<u>393</u>	739	393	738	393							
462.libquantum	24	2414	206	2409	206	<u>2409</u>	<u>206</u>							
464.h264ref	24	<u>776</u>	<u>685</u>	775	685	777	683							
471.omnetpp	24	1111	135	<u>1108</u>	<u>135</u>	1107	135							
473.astar	24	<u>1030</u>	<u>164</u>	1030	164	1031	163							
483.xalancbmk	24	<u>654</u>	<u>253</u>	653	254	657	252							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'/usr/bin/taskset' used to bind processes to CPUs
taskset was used to bind processes to cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode
Adjacent Sector Prefetch Disabled
Hardware Prefetch Disabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = Not Run

ProLiant DL580 G5
(2.66 GHz, Intel Xeon X7460)

SPECint_rate_base2006 = 268

CPU2006 license: 3

Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.10.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.10.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:47:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.