



SPEC® CFP2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 37.0

IBM System x3200 M3 (Intel Xeon X3460)

SPECfp_base2006 = 35.3

CPU2006 license: 11

Test sponsor: IBM Corporation


Tested by: IBM Corporation

Test date: Oct-2009

Oct-2009

Hardware Availability: Oct-2009

Software Availability: Mar-2009

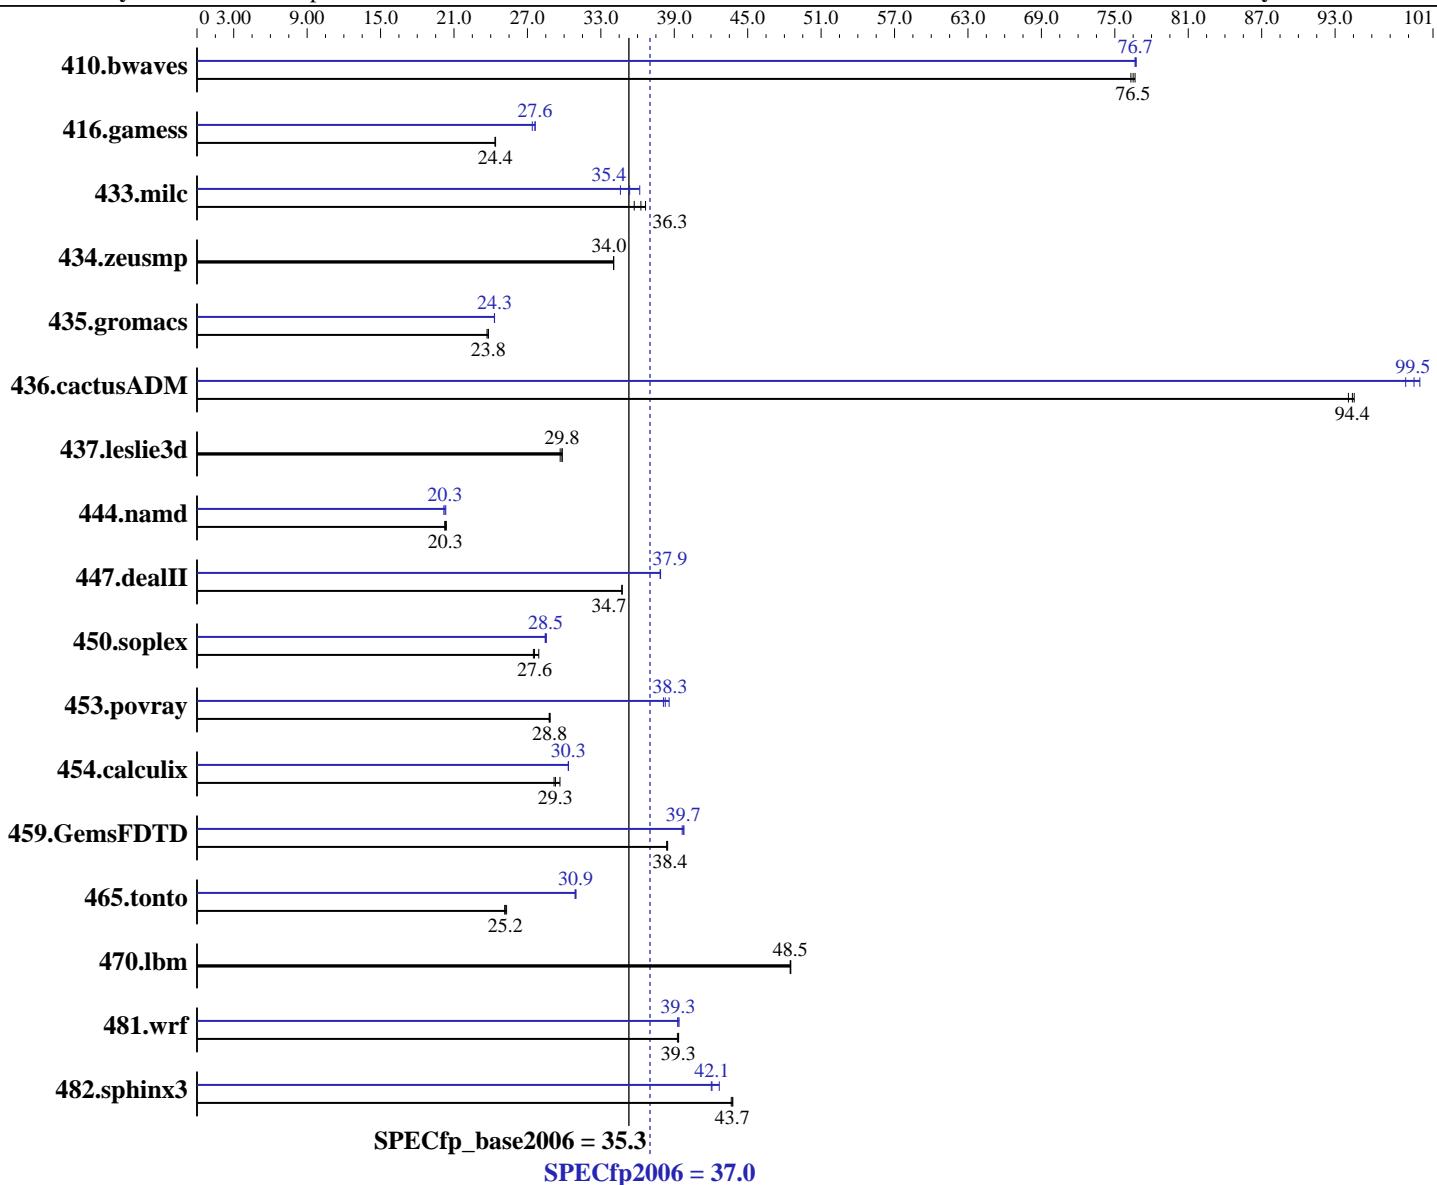

Hardware		Software	
CPU Name:	Intel Xeon X3460	Operating System:	SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
CPU Characteristics:	Intel Turbo Boost Technology up to 3.46 GHz	Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
CPU MHz:	2800	Auto Parallel:	Yes
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1 chip	Base Pointers:	64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Continued on next page	
Secondary Cache:	256 KB I+D on chip per core	Continued on next page	

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 37.0

IBM System x3200 M3 (Intel Xeon X3460)

SPECfp_base2006 = 35.3

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB PC3-10600R)
 Disk Subsystem: 1 x 250 GB SATA, 7200RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	178	76.3	178	76.5	177	76.7	177	76.8	177	76.7	177	76.7
416.gamess	802	24.4	804	24.4	804	24.4	709	27.6	709	27.6	715	27.4
433.milc	257	35.7	250	36.7	253	36.3	265	34.6	254	36.2	260	35.4
434.zeusmp	267	34.0	267	34.0	267	34.0	267	34.0	267	34.0	267	34.0
435.gromacs	300	23.8	300	23.8	301	23.7	294	24.3	294	24.3	294	24.3
436.cactusADM	127	94.4	126	94.6	127	94.1	120	99.9	120	99.5	121	98.8
437.leslie3d	317	29.7	315	29.8	315	29.8	317	29.7	315	29.8	315	29.8
444.namd	394	20.4	395	20.3	396	20.2	395	20.3	398	20.2	396	20.3
447.dealII	329	34.7	329	34.7	329	34.7	302	37.9	302	37.9	302	37.9
450.soplex	302	27.6	303	27.5	299	27.9	292	28.6	293	28.5	293	28.5
453.povray	185	28.8	184	28.9	185	28.8	139	38.3	140	38.1	138	38.6
454.calculix	282	29.3	278	29.7	283	29.2	272	30.3	272	30.3	272	30.4
459.GemsFDTD	276	38.4	276	38.4	276	38.5	267	39.8	267	39.7	268	39.6
465.tonto	391	25.2	389	25.3	391	25.1	318	31.0	319	30.9	318	30.9
470.lbm	283	48.5	283	48.5	283	48.5	283	48.5	283	48.5	283	48.5
481.wrf	284	39.4	284	39.3	285	39.3	284	39.3	284	39.3	284	39.4
482.sphinx3	445	43.8	446	43.7	446	43.7	457	42.7	463	42.1	464	42.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 CPU C-States Enable and Adjacent Sector Prefetch Enable
 Turbo Mode Enable
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
 icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 37.0

IBM System x3200 M3 (Intel Xeon X3460)

SPECfp_base2006 = 35.3

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 37.0

IBM System x3200 M3 (Intel Xeon X3460)

SPECfp_base2006 = 35.3

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	37.0
IBM System x3200 M3 (Intel Xeon X3460)	SPECfp_base2006 =	35.3
CPU2006 license: 11	Test date:	Oct-2009
Test sponsor: IBM Corporation	Hardware Availability:	Oct-2009
Tested by: IBM Corporation	Software Availability:	Mar-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

```

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll12 -ansi-alias -scalar-rep -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll14 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
             -parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll12 -Ob0 -ansi-alias -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                -unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll14 -auto

```

Benchmarks using both Fortran and C:

```

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                 -unroll12 -opt-prefetch -parallel -auto-ilp32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 37.0

IBM System x3200 M3 (Intel Xeon X3460)

SPECfp_base2006 = 35.3

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091028.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091028.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:58:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 November 2009.