



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp®2006 = 30.8

Sun Fire X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_base2006 = 27.7

CPU2006 license: 6


Test date: Jan-2010

Test sponsor: Sun Microsystems

Hardware Availability: Nov-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

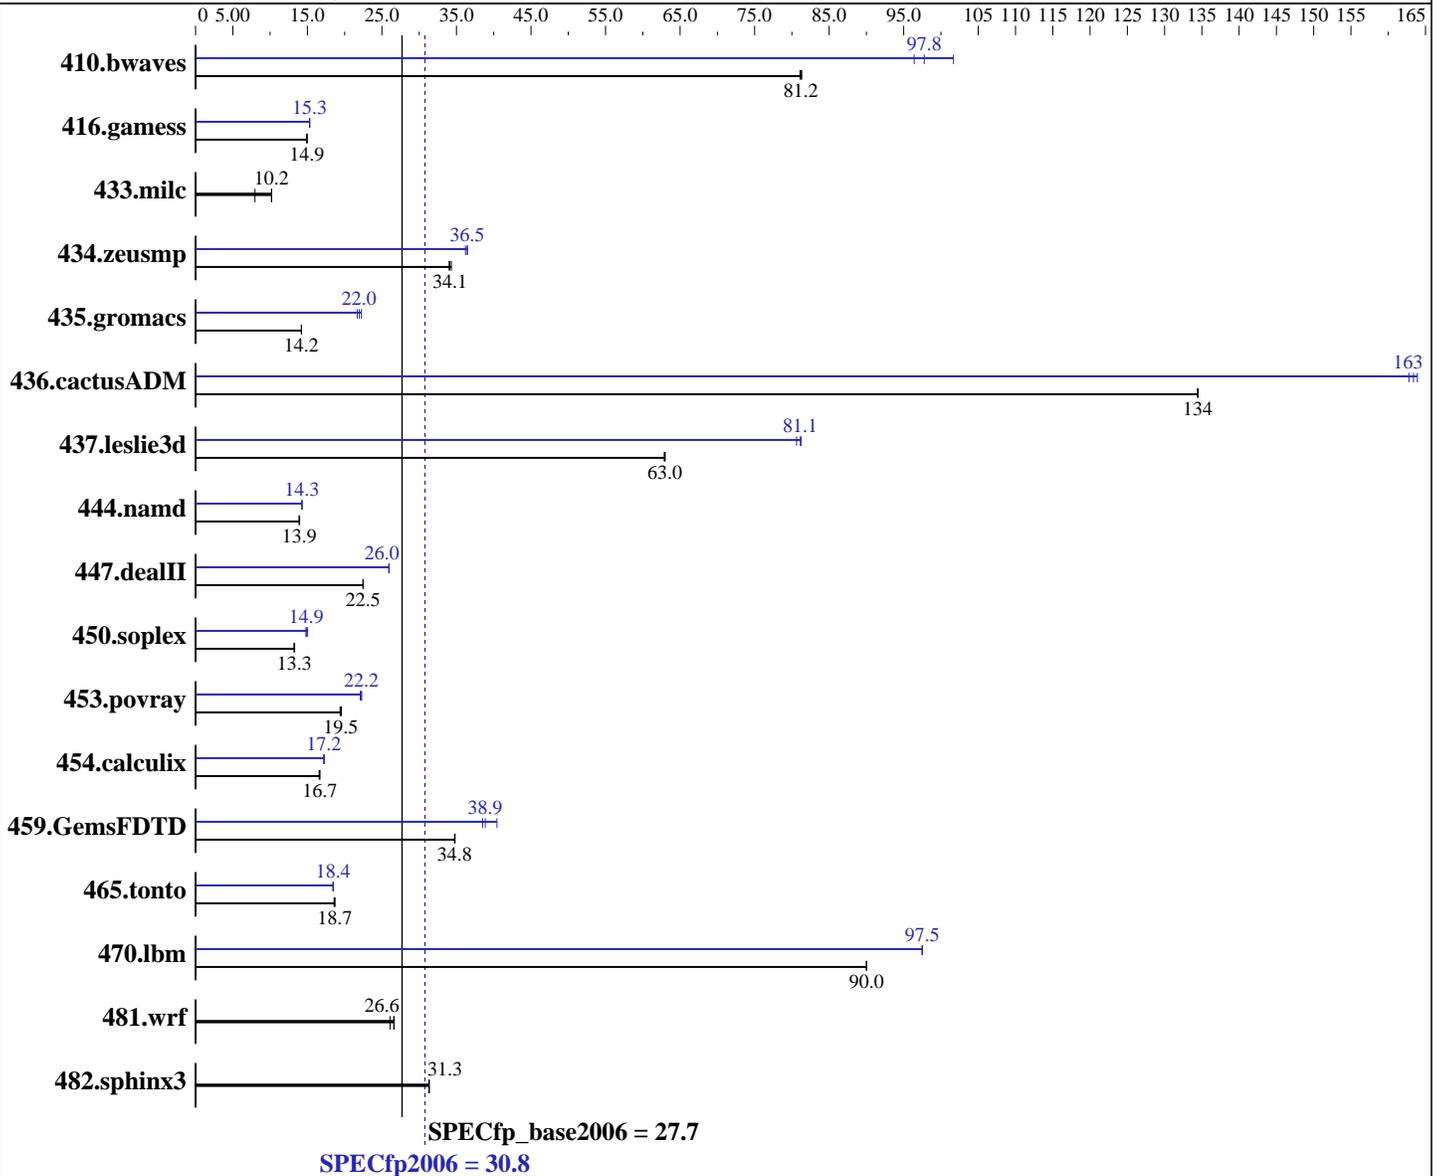

Hardware

CPU Name: AMD Opteron 8435
 CPU Characteristics: 2600
 CPU MHz: Integrated
 FPU: 24 cores, 4 chips, 6 cores/chip
 CPU(s) enabled: 2 or 4 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache:

Continued on next page

Software

Operating System: OpenSolaris 2009.06
 Compiler: Sun Studio 12 Update 1
 Auto Parallel: Yes
 File System: zfs with gzip compression
 System State: Default
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: none



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = **30.8**

Sun Fire X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_base2006 = **27.7**

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jan-2010
Hardware Availability: Nov-2009
Software Availability: Jun-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem: Compact Flash, 16 GB
Other Hardware: None

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---------------|------------|-------------|-------------|-------------|-------------|-------------|------------|-------------|------------|-------------|-------------|-------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 168 | 81.1 | 167 | 81.2 | 167 | 81.3 | 139 | 97.8 | 134 | 102 | 141 | 96.4 |
| 416.gamess | 1310 | 14.9 | 1311 | 14.9 | 1310 | 14.9 | 1278 | 15.3 | 1281 | 15.3 | 1279 | 15.3 |
| 433.milc | 901 | 10.2 | 900 | 10.2 | 1152 | 7.97 | 901 | 10.2 | 900 | 10.2 | 1152 | 7.97 |
| 434.zeusmp | 265 | 34.3 | 267 | 34.1 | 268 | 34.0 | 250 | 36.5 | 250 | 36.5 | 251 | 36.2 |
| 435.gromacs | 503 | 14.2 | 503 | 14.2 | 503 | 14.2 | 325 | 22.0 | 321 | 22.2 | 329 | 21.7 |
| 436.cactusADM | 88.8 | 135 | 88.9 | 134 | 88.9 | 134 | 73.4 | 163 | 72.9 | 164 | 73.1 | 163 |
| 437.leslie3d | 149 | 63.0 | 150 | 62.9 | 149 | 63.0 | 116 | 81.1 | 116 | 81.2 | 117 | 80.6 |
| 444.namd | 577 | 13.9 | 574 | 14.0 | 577 | 13.9 | 562 | 14.3 | 561 | 14.3 | 562 | 14.3 |
| 447.dealII | 509 | 22.5 | 509 | 22.5 | 509 | 22.5 | 441 | 25.9 | 440 | 26.0 | 441 | 26.0 |
| 450.soplex | 627 | 13.3 | 629 | 13.3 | 631 | 13.2 | 561 | 14.9 | 555 | 15.0 | 563 | 14.8 |
| 453.povray | 272 | 19.6 | 273 | 19.5 | 274 | 19.4 | 239 | 22.3 | 241 | 22.1 | 239 | 22.2 |
| 454.calculix | 495 | 16.7 | 495 | 16.7 | 498 | 16.6 | 479 | 17.2 | 478 | 17.2 | 479 | 17.2 |
| 459.GemsFDTD | 305 | 34.8 | 305 | 34.8 | 305 | 34.7 | 273 | 38.9 | 276 | 38.5 | 262 | 40.4 |
| 465.tonto | 529 | 18.6 | 527 | 18.7 | 527 | 18.7 | 533 | 18.4 | 532 | 18.5 | 533 | 18.4 |
| 470.lbm | 153 | 90.0 | 153 | 90.0 | 153 | 90.0 | 141 | 97.5 | 141 | 97.4 | 141 | 97.5 |
| 481.wrf | 428 | 26.1 | 420 | 26.6 | 419 | 26.7 | 428 | 26.1 | 420 | 26.6 | 419 | 26.7 |
| 482.sphinx3 | 622 | 31.3 | 622 | 31.3 | 622 | 31.3 | 622 | 31.3 | 622 | 31.3 | 622 | 31.3 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

The Apache C++ Standard Library V4.2.1 was installed from <http://stdcxx.apache.org/download.html> using:
alias gmake=specmake
gmake BUILDTYPE=8D CONFIG=sunpro.config

Operating System Notes

```
ulimit -s unlimited (shell): increases stack
export OMP_NUM_THREADS=12
export SUNW_MP_PROCBIND "0 2 4 6 8 10 1 3 5 7 9 11"
export SUNW_MP_THR_IDLE=SPIN
```

```
/etc/system parameters
tune_t_fsflushr=10
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = 30.8

Sun Fire X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_base2006 = 27.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jan-2010

Hardware Availability: Nov-2009

Software Availability: Jun-2009

Operating System Notes (Continued)

```
autoup=900
set lpg_alloc_prefer=1
set zfs:zfs_arc_max = 0x10000000
```

Platform Notes

Default BIOS settings used except:
DCT Unganged Mode set to "Always" to enable Unganged Mode

General Notes

Environment variables set by runspec before the start of the run:

```
OMP_NUM_THREADS = "12"
SUNW_MP_PROCBIND = "0 6 12 18 2 8 14 20 4 10 16 22 1 7 13 19 3 9 15 21 5 11 17 23"
SUNW_MP_THR_IDLE = "SPIN"
```

447.dealII (peak): "apache_stdclxx_4_2_1" src.alt was used.

447.dealII (base): "apache_stdclxx_4_2_1" src.alt was used.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = 30.8

Sun Fire X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_base2006 = 27.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jan-2010

Hardware Availability: Nov-2009

Software Availability: Jun-2009

Base Portability Flags (Continued)

```
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-fast -xipo=2 -m64 -xvector=simd -xautopar
```

C++ benchmarks:

```
-fast -xipo=2 -m64 -xvector=simd -library=no%Cstd
-I/data1/stdcxx-4.2.1/include -I/data1/stdcxx-4.2.1/build/include
-L/data1/stdcxx-4.2.1/build/lib -R/data1/stdcxx-4.2.1/build/lib -lstd8D
```

Fortran benchmarks:

```
-fast -xipo=2 -m64 -xvector=simd -xautopar
```

Benchmarks using both Fortran and C:

```
-fast(cc) -xipo=2 -m64 -xvector=simd -xautopar -fast(f90)
```

Base Other Flags

C benchmarks:

```
-V -# -xjobs=24
```

C++ benchmarks:

```
-verbose=diags,version -xjobs=24
```

Fortran benchmarks:

```
-V -v -xjobs=24
```

Benchmarks using both Fortran and C:

```
-V -# -xjobs=24 -v
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = 30.8

Sun Fire X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_base2006 = 27.7

CPU2006 license: 6

Test date: Jan-2010

Test sponsor: Sun Microsystems

Hardware Availability: Nov-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Peak Portability Flags

433.milc: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fast -xipo=2 -m64 -xvector=simd -xautopar
-Qoption iropt -Aparallel:nthreads=24 -xreduction
-L/data1/SmartHeap_9/lib -R/data1/SmartHeap_9/lib -lsmartheap_mt64
-lmvec

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xunroll=8 -library=stlport4

447.dealIII: -fast -xipo=1 -m64 -xpagesize=2M -xalias_level=compatible
-xdepend -library=no%Cstd -I/data1/stdcxx-4.2.1/include
-I/data1/stdcxx-4.2.1/build/include
-L/data1/stdcxx-4.2.1/build/lib
-R/data1/stdcxx-4.2.1/build/lib -lstd8D

450.soplex: -fast -xipo=2 -xpagesize=2M -xrestrict
-xalias_level=simple -xprefetch=no%auto -library=stlport4
-xdepend

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = 30.8

Sun Fire X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_base2006 = 27.7

CPU2006 license: 6

Test date: Jan-2010

Test sponsor: Sun Microsystems

Hardware Availability: Nov-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

Peak Optimization Flags (Continued)

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xalias_level=simple -library=stlport4 -xpagesize=2M

Fortran benchmarks:

410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xprefetch=no%auto -xautopar -xreduction

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xunroll=1 -qoption iropt -Ainline:cp=19
-qoption iropt -Ainline:rs=50 -qoption iropt -Ainline:irs=30

434.zeusmp: -fast -xipo=2 -m64 -xvector=simd -xautopar -xreduction

437.leslie3d: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xvector=simd -xautopar
-Qoption iropt -Aparallel:nthreads=24 -xreduction -lumem

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xvector=simd -xautopar
-Qoption iropt -Aparallel:nthreads=24 -xreduction

465.tonto: -fast -xipo=2 -m64 -xvector=lib -xalias -xdepend
-xpagesize=2M -xautopar -stackvar -xreduction
-xprefetch=no%auto

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64 -fsimple=2 -Qoption ube -fsimple=3
-xprefetch=no%auto -xpagesize=2M -xautopar -xreduction

436.cactusADM: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64 -xvector=simd -xautopar
-W2, -Aparallel:nthreads=24
-Qoption iropt -Aparallel:nthreads=24

454.calculix: -fast(cc) -fast(f90) -xipo=2 -m64 -xpagesize=2M
-xvector=simd

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp2006 = 30.8

Sun Fire X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_base2006 = 27.7

CPU2006 license: 6

Test date: Jan-2010

Test sponsor: Sun Microsystems

Hardware Availability: Nov-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-V -# -xjobs=24

C++ benchmarks:

-verbose=diags,version -xjobs=24

Fortran benchmarks:

-V -v -xjobs=24

Benchmarks using both Fortran and C:

-V -# -xjobs=24 -v

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86_64.20090818.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86_64.20090818.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 05:53:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 February 2010.