



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp<sup>®</sup>\_rate2006 = 210**

PowerEdge R610 (Intel Xeon X5667, 3.06 GHz)

**SPECfp\_rate\_base2006 = 202**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

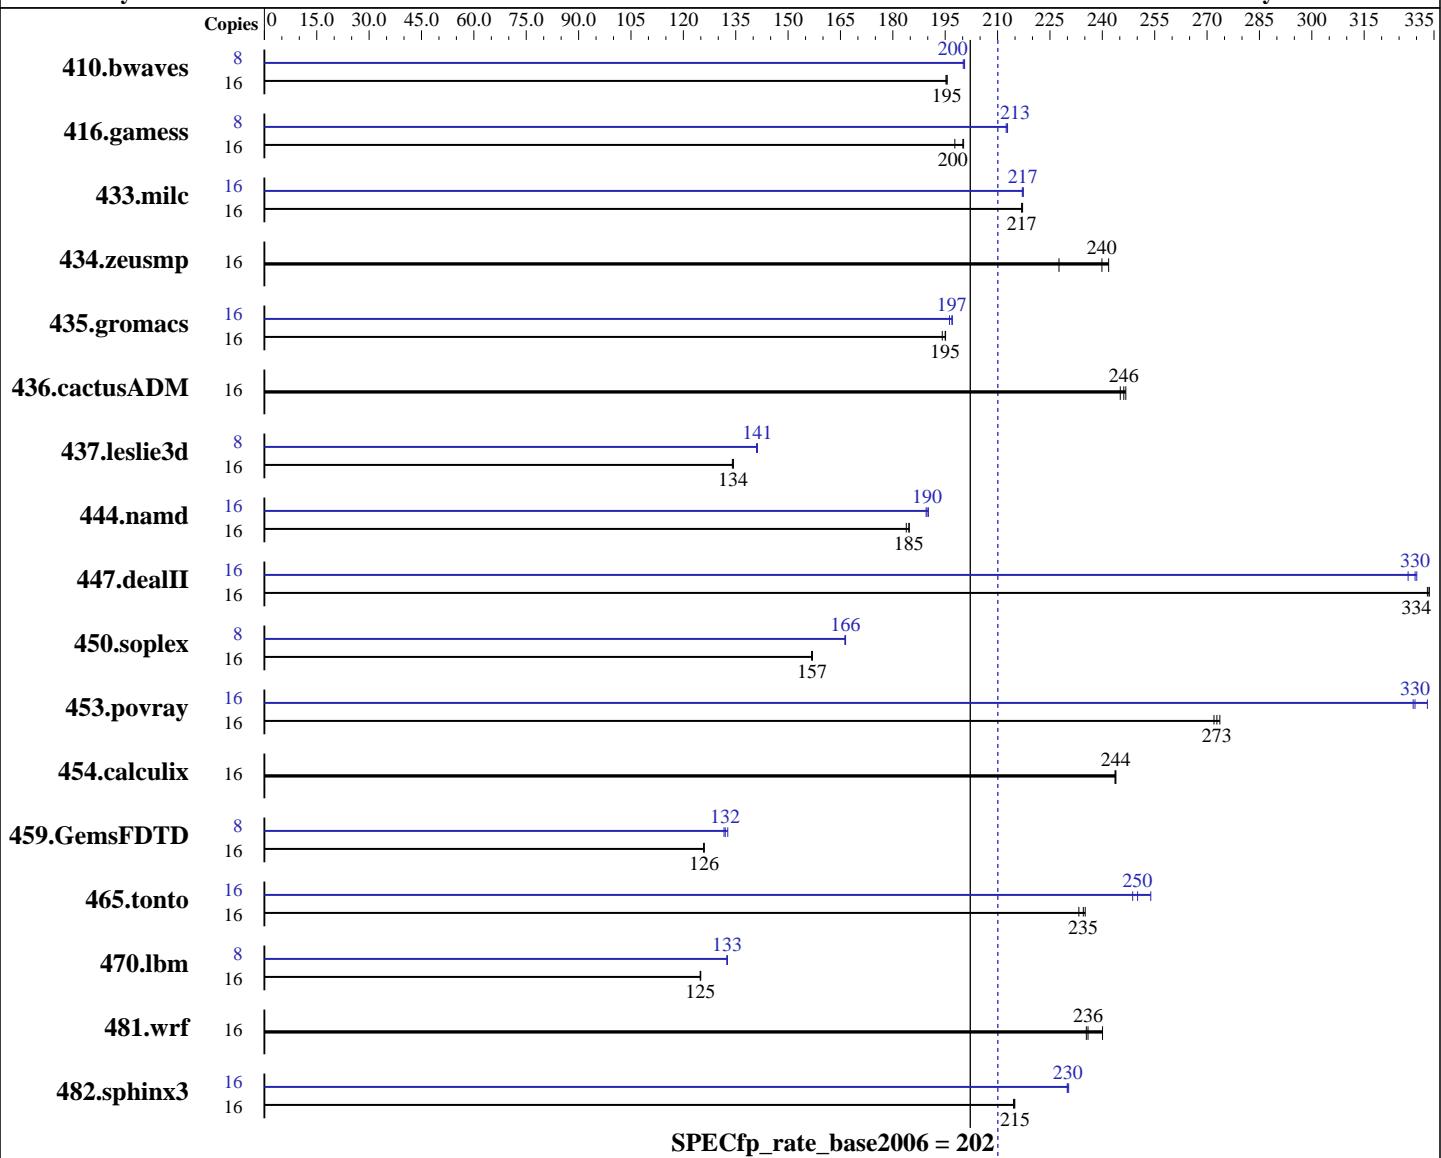

## Hardware

CPU Name: Intel Xeon X5667  
CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz  
CPU MHz: 3067  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 210**

PowerEdge R610 (Intel Xeon X5667, 3.06 GHz)

**SPECfp\_rate\_base2006 = 202**

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>1112</b>	<b>195</b>	1112	196	1114	195	8	<b>542</b>	<b>200</b>	542	201	543	200
416.gamess	16	1584	198	1564	200	<b>1566</b>	<b>200</b>	8	737	212	<b>736</b>	<b>213</b>	736	213
433.milc	16	676	217	<b>677</b>	<b>217</b>	677	217	16	<b>676</b>	<b>217</b>	677	217	676	217
434.zeusmp	16	<b>607</b>	<b>240</b>	602	242	640	228	16	<b>607</b>	<b>240</b>	602	242	640	228
435.gromacs	16	588	194	<b>586</b>	<b>195</b>	586	195	16	582	196	<b>580</b>	<b>197</b>	580	197
436.cactusADM	16	<b>777</b>	<b>246</b>	775	247	780	245	16	<b>777</b>	<b>246</b>	775	247	780	245
437.leslie3d	16	1122	134	1120	134	<b>1120</b>	<b>134</b>	8	533	141	<b>533</b>	<b>141</b>	533	141
444.namd	16	<b>695</b>	<b>185</b>	698	184	695	185	16	677	190	<b>676</b>	<b>190</b>	675	190
447.dealII	16	<b>549</b>	<b>334</b>	549	334	549	333	16	559	328	555	330	<b>555</b>	<b>330</b>
450.soplex	16	850	157	<b>850</b>	<b>157</b>	851	157	8	401	166	<b>401</b>	<b>166</b>	401	166
453.povray	16	311	274	<b>312</b>	<b>273</b>	313	272	16	259	329	<b>258</b>	<b>330</b>	256	333
454.calculix	16	<b>541</b>	<b>244</b>	541	244	542	244	16	<b>541</b>	<b>244</b>	541	244	542	244
459.GemsFDTD	16	1349	126	<b>1348</b>	<b>126</b>	1348	126	8	645	132	<b>643</b>	<b>132</b>	640	133
465.tonto	16	<b>671</b>	<b>235</b>	670	235	675	233	16	620	254	633	249	<b>630</b>	<b>250</b>
470.lbm	16	1759	125	1761	125	<b>1761</b>	<b>125</b>	8	830	133	829	133	<b>829</b>	<b>133</b>
481.wrf	16	<b>758</b>	<b>236</b>	744	240	759	235	16	<b>758</b>	<b>236</b>	744	240	759	235
482.sphinx3	16	1451	215	<b>1452</b>	<b>215</b>	1453	215	16	1354	230	<b>1355</b>	<b>230</b>	1356	230

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610 (Intel Xeon X5667, 3.06 GHz)

**SPECfp\_rate2006 = 210**

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## General Notes

The Dell PowerEdge R610 (Intel Xeon X5667, 3.06 GHz) and the Bull NovaScale R440 F2 (Intel Xeon X5667, 3.06 GHz) models are electronically equivalent. The results have been measured on a Dell PowerEdge R610 (Intel Xeon X5667, 3.06 GHz) model.

## Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
    433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
    437.leslie3d: `-DSPEC_CPU_LP64`  
        444.namd: `-DSPEC_CPU_LP64`  
        447.dealII: `-DSPEC_CPU_LP64`  
        450.soplex: `-DSPEC_CPU_LP64`  
        453.povray: `-DSPEC_CPU_LP64`  
        454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
    465.tonto: `-DSPEC_CPU_LP64`  
    470.lbm: `-DSPEC_CPU_LP64`  
        481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
482.sphinx3: `-DSPEC_CPU_LP64`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610 (Intel Xeon X5667, 3.06 GHz)

**SPECfp\_rate2006 = 210**

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610 (Intel Xeon X5667, 3.06 GHz)

**SPECfp\_rate2006 = 210**

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -opt-prefetch
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3 -ansi-alias -auto-ilp32
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -ansi-alias -scalar-rep-
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -Obo -ansi-alias -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static
```

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -Obo
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -auto -inline-calloc -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610 (Intel Xeon X5667, 3.06 GHz)

**SPECfp\_rate2006 = 210**

CPU2006 license: 55

**Test date:** Mar-2010

Test sponsor: Dell Inc.

**Hardware Availability:** Mar-2010

Tested by: Dell Inc.

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -opt-prefetch -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: basepeak = yes
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 05:06:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 March 2010.