



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 45.2

Huawei BH620, Intel Xeon X5670

SPECfp_base2006 = 42.1

CPU2006 license: 3175


Test date: Mar-2010

Test sponsor: Huawei

Hardware Availability: Jan-2010

Tested by: Huawei

Software Availability: Feb-2010

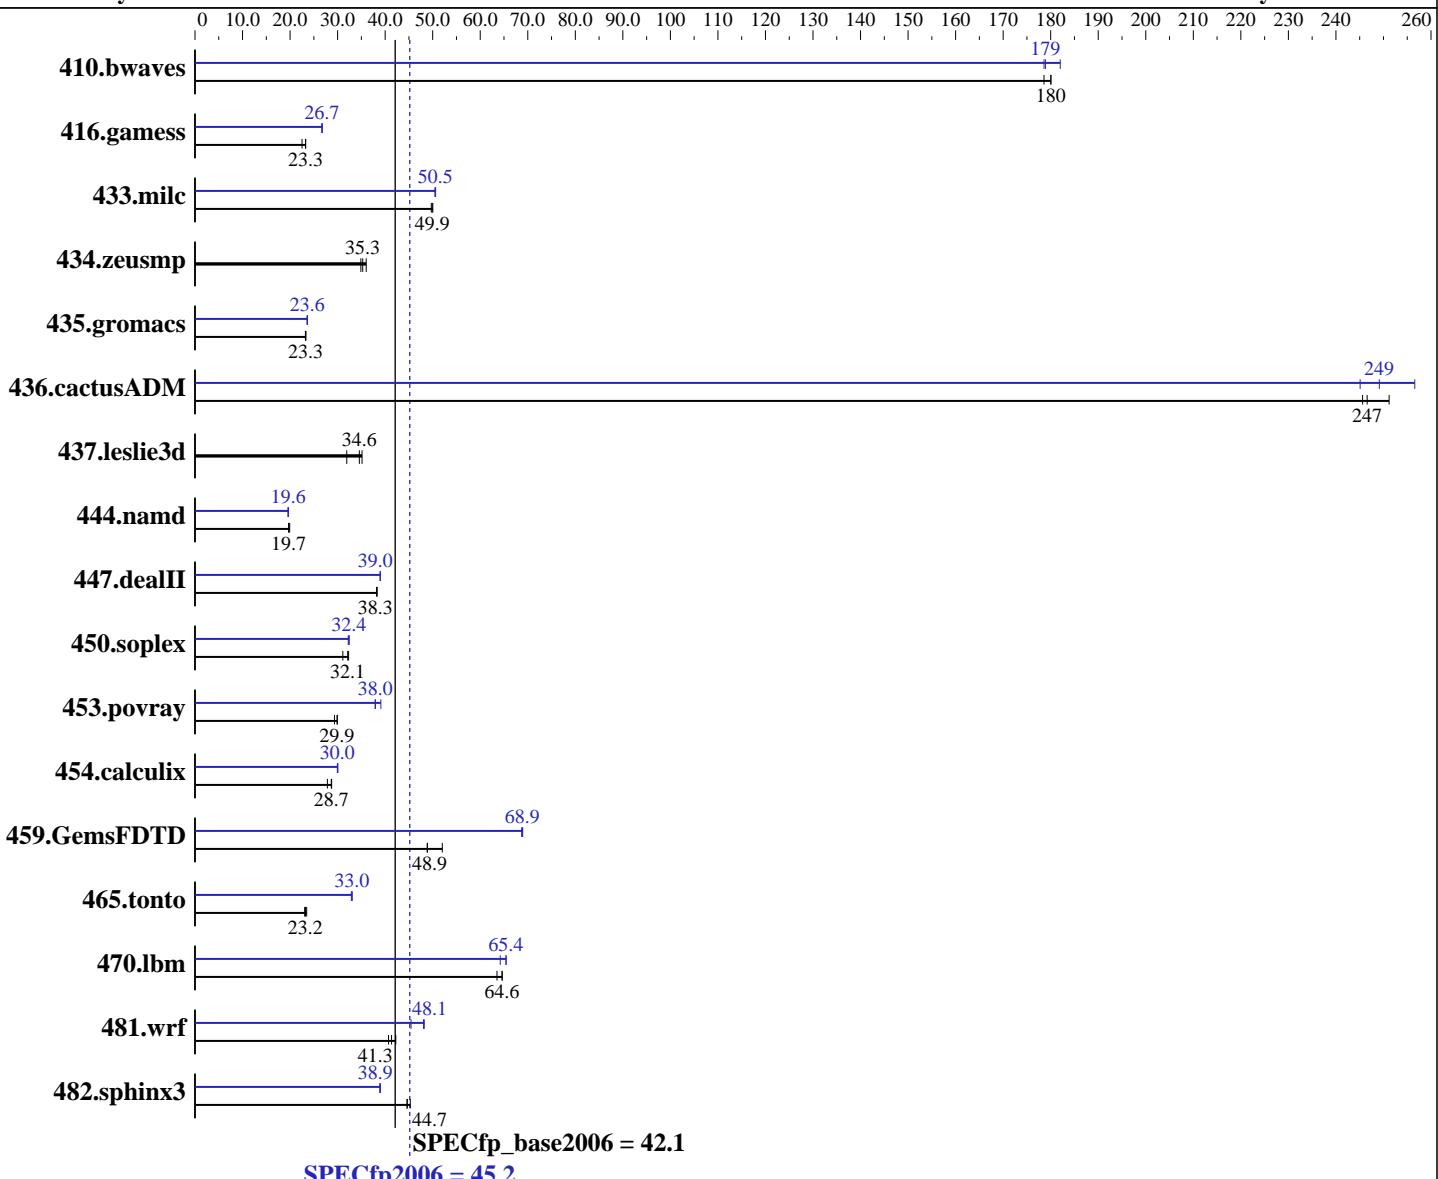

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Compiler: Kernel 2.6.27.19-5-default
 Auto Parallel: Intel C++ and Fortran Professional Compiler for IA32 and
 File System: Intel 64, Version 11.1
 System State: Build 20091130 Package ID: l_cproc_p_11.1.064
 Yes
 ext3
 Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 45.2

Huawei BH620, Intel Xeon X5670

SPECfp_base2006 = 42.1

CPU2006 license: 3175

Test date: Mar-2010

Test sponsor: Huawei

Hardware Availability: Jan-2010

Tested by: Huawei

Software Availability: Feb-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB PC3 10600R, dual rank, CL9, ECC)
 Disk Subsystem: 1 x 146GB SAS,10k RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	76.1	179	75.5	180	<u>75.5</u>	<u>180</u>	76.1	179	<u>76.0</u>	<u>179</u>	74.7	182
416.gamess	870	22.5	841	23.3	842	23.3	733	26.7	733	26.7	732	26.8
433.milc	185	49.7	184	50.0	184	49.9	182	50.5	182	50.5	181	50.6
434.zeusmp	261	34.9	258	35.3	253	36.0	261	34.9	258	35.3	253	36.0
435.gromacs	306	23.3	307	23.3	307	23.2	303	23.6	302	23.6	302	23.6
436.cactusADM	48.7	246	47.6	251	48.5	247	48.8	245	48.0	249	46.6	257
437.leslie3d	272	34.6	268	35.1	294	31.9	272	34.6	268	35.1	294	31.9
444.namd	407	19.7	403	19.9	407	19.7	409	19.6	409	19.6	409	19.6
447.dealII	299	38.3	299	38.3	300	38.2	294	39.0	293	39.0	294	39.0
450.soplex	260	32.1	268	31.1	258	32.3	259	32.2	257	32.4	257	32.4
453.povray	181	29.3	178	29.9	178	29.9	140	38.0	140	37.9	136	39.1
454.calculix	288	28.7	287	28.7	296	27.9	275	30.0	274	30.1	275	30.0
459.GemsFDTD	204	52.0	217	48.9	217	48.9	154	68.9	154	68.9	154	68.7
465.tonto	419	23.5	423	23.2	427	23.1	298	33.0	298	33.0	299	32.9
470.lbm	216	63.5	213	64.6	213	64.6	214	64.2	210	65.4	210	65.5
481.wrf	270	41.3	264	42.2	274	40.7	232	48.2	232	48.1	246	45.4
482.sphinx3	430	45.3	436	44.7	437	44.6	501	38.9	500	39.0	501	38.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 45.2

Huawei BH620, Intel Xeon X5670

SPECfp_base2006 = 42.1

CPU2006 license: 3175

Test date: Mar-2010

Test sponsor: Huawei

Hardware Availability: Jan-2010

Tested by: Huawei

Software Availability: Feb-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 45.2

Huawei BH620, Intel Xeon X5670

SPECfp_base2006 = 42.1

CPU2006 license: 3175

Test date: Mar-2010

Test sponsor: Huawei

Hardware Availability: Jan-2010

Tested by: Huawei

Software Availability: Feb-2010

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 45.2

Huawei BH620, Intel Xeon X5670

SPECfp_base2006 = 42.1

CPU2006 license: 3175

Test date: Mar-2010

Test sponsor: Huawei

Hardware Availability: Jan-2010

Tested by: Huawei

Software Availability: Feb-2010

Peak Optimization Flags (Continued)

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 45.2

Huawei BH620, Intel Xeon X5670

SPECfp_base2006 = 42.1

CPU2006 license: 3175

Test date: Mar-2010

Test sponsor: Huawei

Hardware Availability: Jan-2010

Tested by: Huawei

Software Availability: Feb-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:56:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 May 2010.