



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

## SPECint®\_rate2006 = 346

## Huawei BH620, Intel Xeon X5670

## SPECint\_rate\_base2006 = 323

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

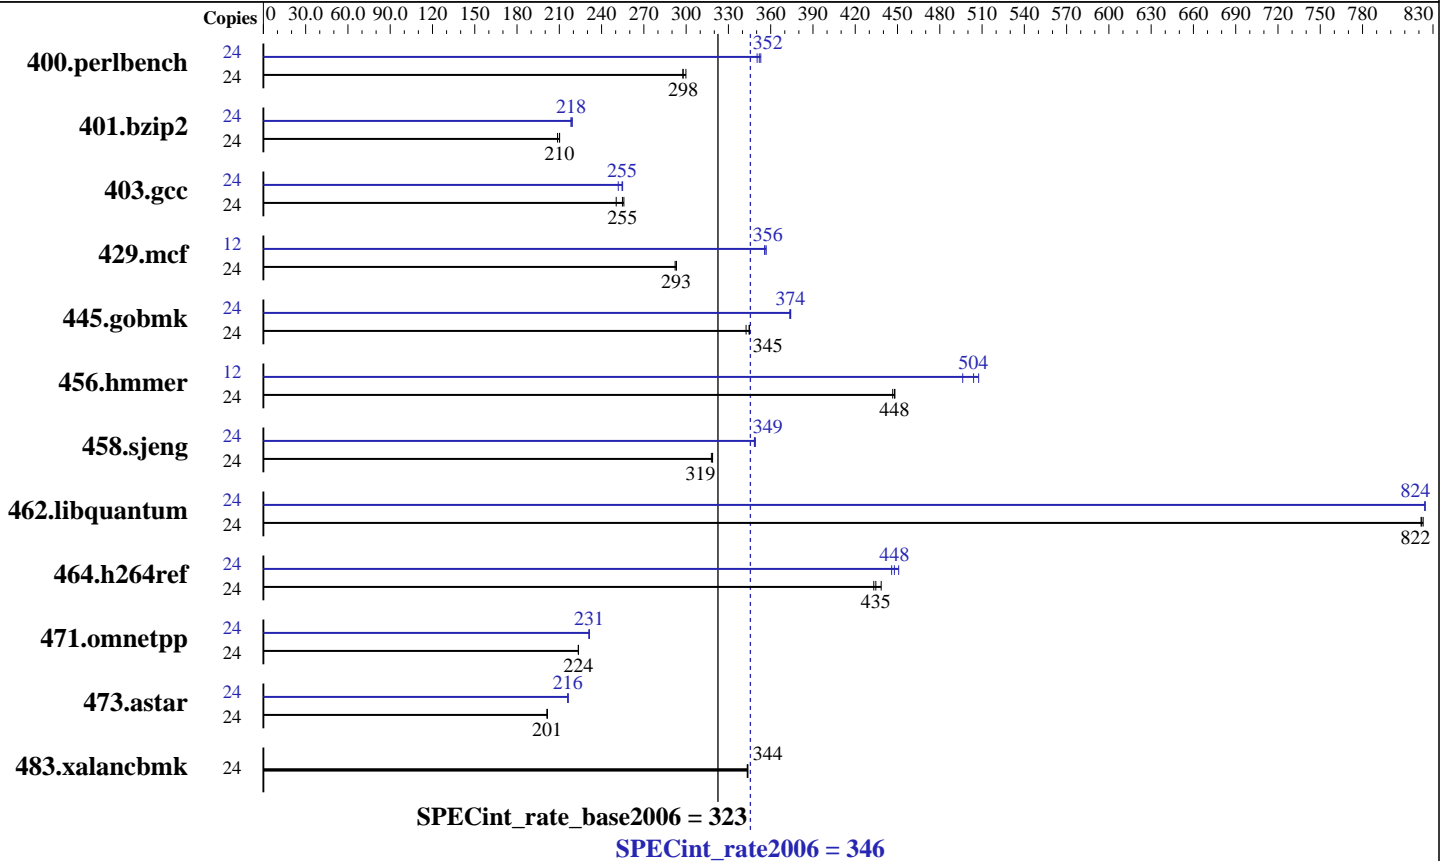

### Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB PC3 10600R, dual rank, CL9, ECC)  
 Disk Subsystem: 1 x 146GB SAS,10k RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 346

Huawei BH620, Intel Xeon X5670

SPECint\_rate\_base2006 = 323

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Mar-2010  
Hardware Availability: Jan-2010  
Software Availability: Feb-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	787	298	782	300	<b>787</b>	<b>298</b>	24	664	353	669	350	<b>666</b>	<b>352</b>
401.bzip2	24	1110	209	<b>1103</b>	<b>210</b>	1102	210	24	1056	219	1061	218	<b>1060</b>	<b>218</b>
403.gcc	24	755	256	772	250	<b>758</b>	<b>255</b>	24	<b>759</b>	<b>255</b>	758	255	767	252
429.mcf	24	749	292	747	293	<b>747</b>	<b>293</b>	12	307	357	308	356	<b>308</b>	<b>356</b>
445.gobmk	24	730	345	<b>730</b>	<b>345</b>	735	343	24	673	374	674	374	<b>673</b>	<b>374</b>
456.hammer	24	500	448	501	447	<b>500</b>	<b>448</b>	12	226	496	221	508	<b>222</b>	<b>504</b>
458.sjeng	24	911	319	<b>912</b>	<b>319</b>	913	318	24	<b>833</b>	<b>349</b>	833	348	832	349
462.libquantum	24	605	822	604	823	<b>605</b>	<b>822</b>	24	603	824	603	824	<b>603</b>	<b>824</b>
464.h264ref	24	<b>1222</b>	<b>435</b>	1226	433	1211	438	24	1178	451	1191	446	<b>1186</b>	<b>448</b>
471.omnetpp	24	<b>671</b>	<b>224</b>	671	224	671	223	24	<b>649</b>	<b>231</b>	648	231	649	231
473.astar	24	837	201	<b>836</b>	<b>201</b>	836	202	24	779	216	780	216	<b>779</b>	<b>216</b>
483.xalancbmk	24	482	343	482	344	<b>482</b>	<b>344</b>	24	482	343	482	344	<b>482</b>	<b>344</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 346

Huawei BH620, Intel Xeon X5670

SPECint\_rate\_base2006 = 323

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

## Base Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 346

Huawei BH620, Intel Xeon X5670

SPECint\_rate\_base2006 = 323

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmarheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 346

Huawei BH620, Intel Xeon X5670

SPECint\_rate\_base2006 = 323

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 07:56:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 May 2010.