



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 5870

IBM Power 795 (4.25 GHz, 128 core)

SPECfp_rate_base2006 = 5450

CPU2006 license: 11


Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

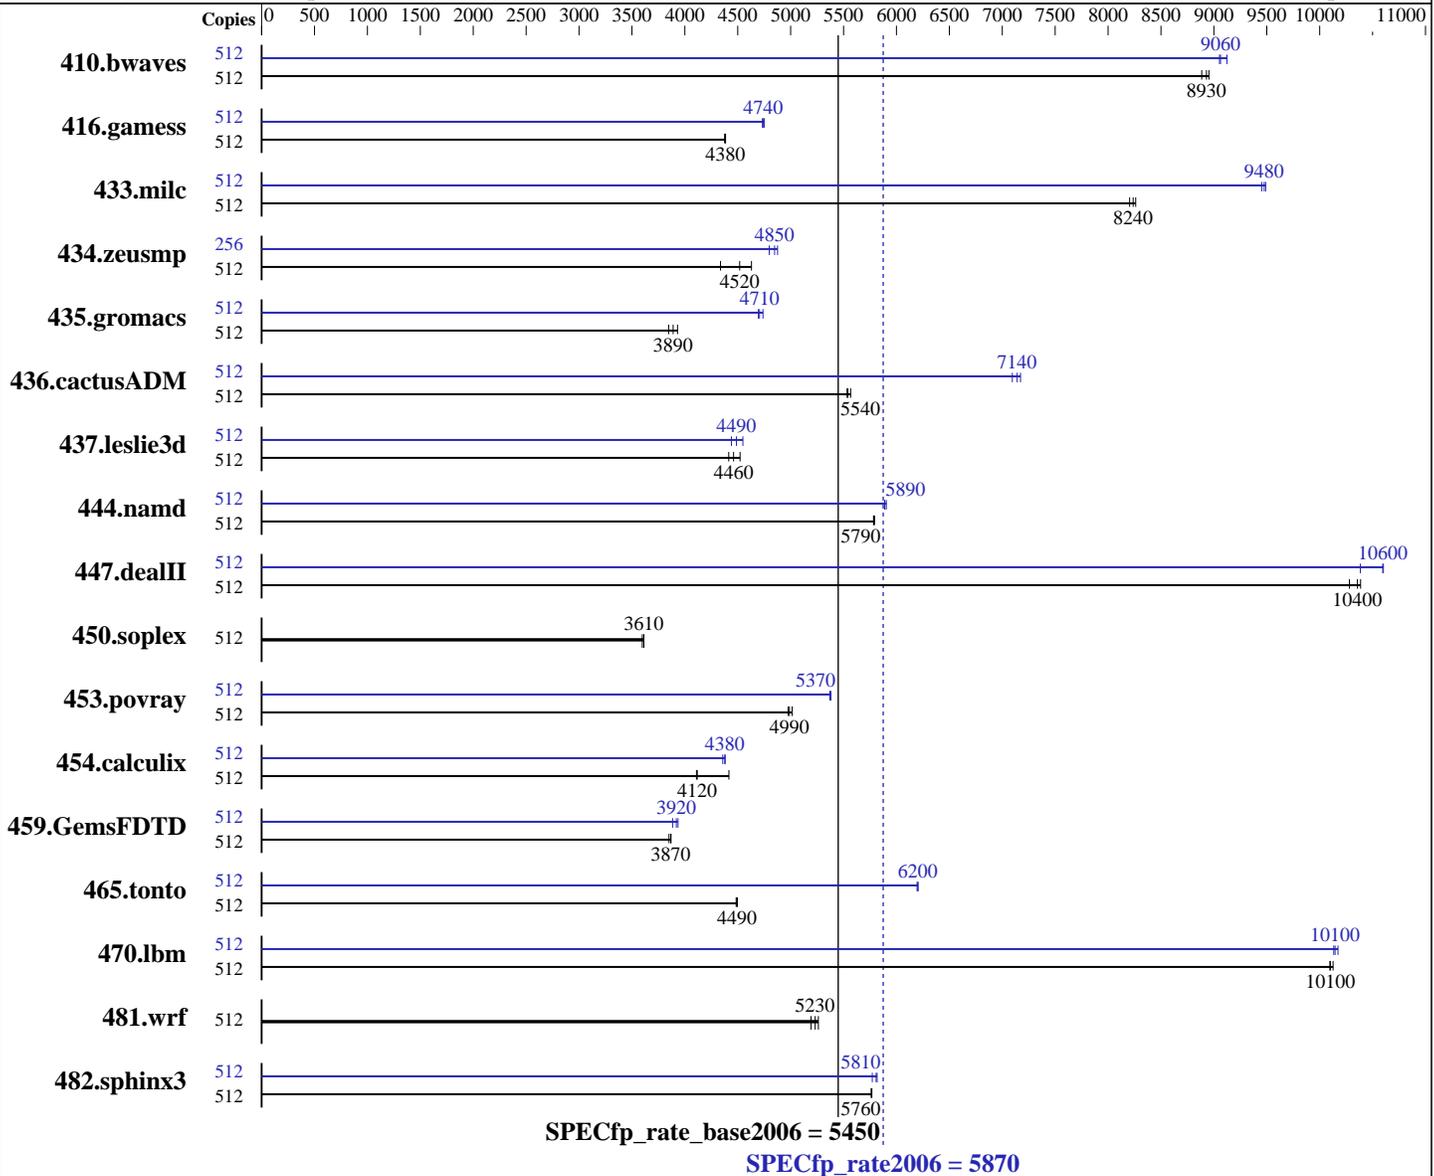

Hardware

CPU Name: POWER7
 CPU Characteristics: TurboCore mode
 CPU MHz: 4256
 FPU: Integrated
 CPU(s) enabled: 128 cores, 32 chips, 4 cores/chip, 4 threads/core
 CPU(s) orderable: 48 - 128 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: IBM AIX V7.1
 Compiler: IBM XL C/C++ for AIX, V11.1
 Version: 11.01.0000.0002
 IBM XL Fortran for AIX, V13.1
 Version: 13.01.0000.0002
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 5870

IBM Power 795 (4.25 GHz, 128 core)

SPECfp_rate_base2006 = 5450

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

L3 Cache: 4 MB I+D on chip per core
Other Cache: 16 MB I+D on chip per chip
Memory: 2 TB (256 x 8 GB) DDR3 1066 MHz
Disk Subsystem: 38 x 146.8 GB Raid0 SAS SFF 15K RPM
Other Hardware: None

Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	512	777	8950	<u>779</u>	<u>8930</u>	783	8890	512	<u>768</u>	<u>9060</u>	763	9120	769	9050
416.gamess	512	<u>2287</u>	<u>4380</u>	2291	4380	2286	4380	512	2110	4750	2118	4730	<u>2114</u>	<u>4740</u>
433.milc	512	573	8200	569	8260	<u>571</u>	<u>8240</u>	512	497	9450	<u>496</u>	<u>9480</u>	495	9490
434.zeusmp	512	1074	4340	<u>1031</u>	<u>4520</u>	1006	4630	256	486	4800	478	4880	<u>480</u>	<u>4850</u>
435.gromacs	512	<u>940</u>	<u>3890</u>	950	3850	930	3930	512	<u>777</u>	<u>4710</u>	771	4740	779	4690
436.cactusADM	512	1106	5530	<u>1104</u>	<u>5540</u>	1099	5570	512	862	7100	853	7170	<u>857</u>	<u>7140</u>
437.leslie3d	512	1090	4410	<u>1079</u>	<u>4460</u>	1064	4520	512	1058	4550	1084	4440	<u>1073</u>	<u>4490</u>
444.namd	512	<u>710</u>	<u>5790</u>	710	5780	709	5790	512	697	5890	695	5900	<u>697</u>	<u>5890</u>
447.dealII	512	570	10300	564	10400	<u>566</u>	<u>10400</u>	512	<u>553</u>	<u>10600</u>	552	10600	564	10400
450.soplex	512	1187	3600	1182	3610	<u>1182</u>	<u>3610</u>	512	1187	3600	1182	3610	<u>1182</u>	<u>3610</u>
453.povray	512	547	4980	543	5010	<u>546</u>	<u>4990</u>	512	506	5380	507	5370	<u>507</u>	<u>5370</u>
454.calculix	512	956	4420	1028	4110	<u>1026</u>	<u>4120</u>	512	969	4360	<u>965</u>	<u>4380</u>	964	4380
459.GemsFDTD	512	1411	3850	<u>1405</u>	<u>3870</u>	1404	3870	512	<u>1386</u>	<u>3920</u>	1380	3940	1398	3880
465.tonto	512	<u>1121</u>	<u>4490</u>	1123	4480	1121	4500	512	812	6200	813	6190	<u>812</u>	<u>6200</u>
470.lbm	512	695	10100	<u>696</u>	<u>10100</u>	697	10100	512	694	10100	692	10200	<u>693</u>	<u>10100</u>
481.wrf	512	<u>1093</u>	<u>5230</u>	1087	5260	1101	5190	512	<u>1093</u>	<u>5230</u>	1087	5260	1101	5190
482.sphinx3	512	1732	5760	<u>1732</u>	<u>5760</u>	1730	5770	512	1729	5770	<u>1718</u>	<u>5810</u>	1715	5820

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for 433.milc
with options -O3 -lu -1 -nodp -sdp 9 -m power7

fdpr binary optimization tool used for 434.zeusmp
with options -RD -O4 -sdp 9 -vrox -nodp -m power7

fdpr binary optimization tool used for 435.gromacs
with options -O3 -lu -1 -nodp -sdp 9 -m power7

fdpr binary optimization tool used for 436.cactusADM
with options -O3 -m power7

fdpr binary optimization tool used for 437.leslie3d
with options -O4 -sdp 9 -vrox -rtb -nodp -m power7

fdpr binary optimization tool used for 444.namd
with options -O3 -lu -1 -nodp -sdp 9 -m power7

fdpr binary optimization tool used for 447.dealII
with options -O4 -sdp 9 -vrox -m power7 -RD -dp

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 5870

IBM Power 795 (4.25 GHz, 128 core)

SPECfp_rate_base2006 = 5450

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Sep-2010

Software Availability: Sep-2010

Peak Tuning Notes (Continued)

```
fdpr binary optimization tool used for 450.soplex
with options -O4 -sdp 9 -vrox -kr -m power7
fdpr binary optimization tool used for 453.povray
with options -O4 -sdp 9 -vrox -rtb -nodp -m power7
fdpr binary optimization tool used for 454.calculix
with options -O4 -sdp 9 -vrox -rtb -nodp -m power7
fdpr binary optimization tool used for 459.GemsFDTD
with options -O4 -sdp 9 -vrox -kr -m power7
fdpr binary optimization tool used for 482.sphinx3
with options -O4 -nodp -m power7 -vrox
```

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
84600 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlC
```

Fortran benchmarks:

```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:

```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 5870

IBM Power 795 (4.25 GHz, 128 core)

SPECfp_rate_base2006 = 5450

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Base Portability Flags

```
410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-qipa=threads -bmaxdata:0x40000000 -O5 -qlargepage -O4 -D_ILS_MACROS
-blpdata
```

C++ benchmarks:

```
-qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage -O4 -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-qipa=threads -bmaxdata:0x60000000 -O5 -qlargepage -O4
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-qipa=threads -bmaxdata:0x60000000 -O5 -qlargepage -O4 -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 5870

IBM Power 795 (4.25 GHz, 128 core)

SPECfp_rate_base2006 = 5450

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname -DSPEC_CPU_LP64
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -qipa=threads -bmaxdata:0x40000000 -O5 -qsimd -qvecnv01
-qlargepage -D_ILS_MACROS -qrestrict -qprefetch=aggressive
-qalign=natural -blpdata -btextpsize:64K

470.lbm: -qipa=threads -bmaxdata:0x30000000 -O5 -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

482.sphinx3: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

444.namd: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnv01 -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

447.dealIII: -qipa=threads -bmaxdata:0x50000000 -O4 -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata -btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 5870

IBM Power 795 (4.25 GHz, 128 core)

SPECfp_rate_base2006 = 5450

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64
-qsimd -qvecnvол -qlargepage -D_ILS_MACROS -qalign=natural
-blpdata -btextpsize:64K

Fortran benchmarks:

410.bwaves: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O4 -qlargepage -qsmallstack=dynlenonheap
-blpdata -btextpsize:64K

416.gamess: -qipa=threads -bmaxdata:0x40000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnvол -qarch=pwr5
-qlargepage -qalias=nostd -blpdata -btextpsize:64K

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qxlf90=nosignedzero
-blpdata -btextpsize:64K

437.leslie3d: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -blpdata -btextpsize:64K

459.GemsFDTD: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -blpdata
-btextpsize:64K

465.tonto: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnvол -blpdata
-btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-qvecnvол -D_ILS_MACROS -blpdata -btextpsize:64K

436.cactusADM: -qipa=threads -O4 -q64 -qsimd -qvecnvол -D_ILS_MACROS
-qnostrict -blpdata -btextpsize:64K

454.calculix: -qipa=threads -O5 -qsimd -qvecnvол -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 5870

IBM Power 795 (4.25 GHz, 128 core)

SPECfp_rate_base2006 = 5450

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Sep-2010

Software Availability: Sep-2010

Peak Other Flags

C benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

470.lbm: -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

410.bwaves: -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

416.gamess: -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

465.tonto: -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:03:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 September 2010.