



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M9000

SPECfp®_rate2006 = 1500
SPECfp_rate_base2006 = 1390

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

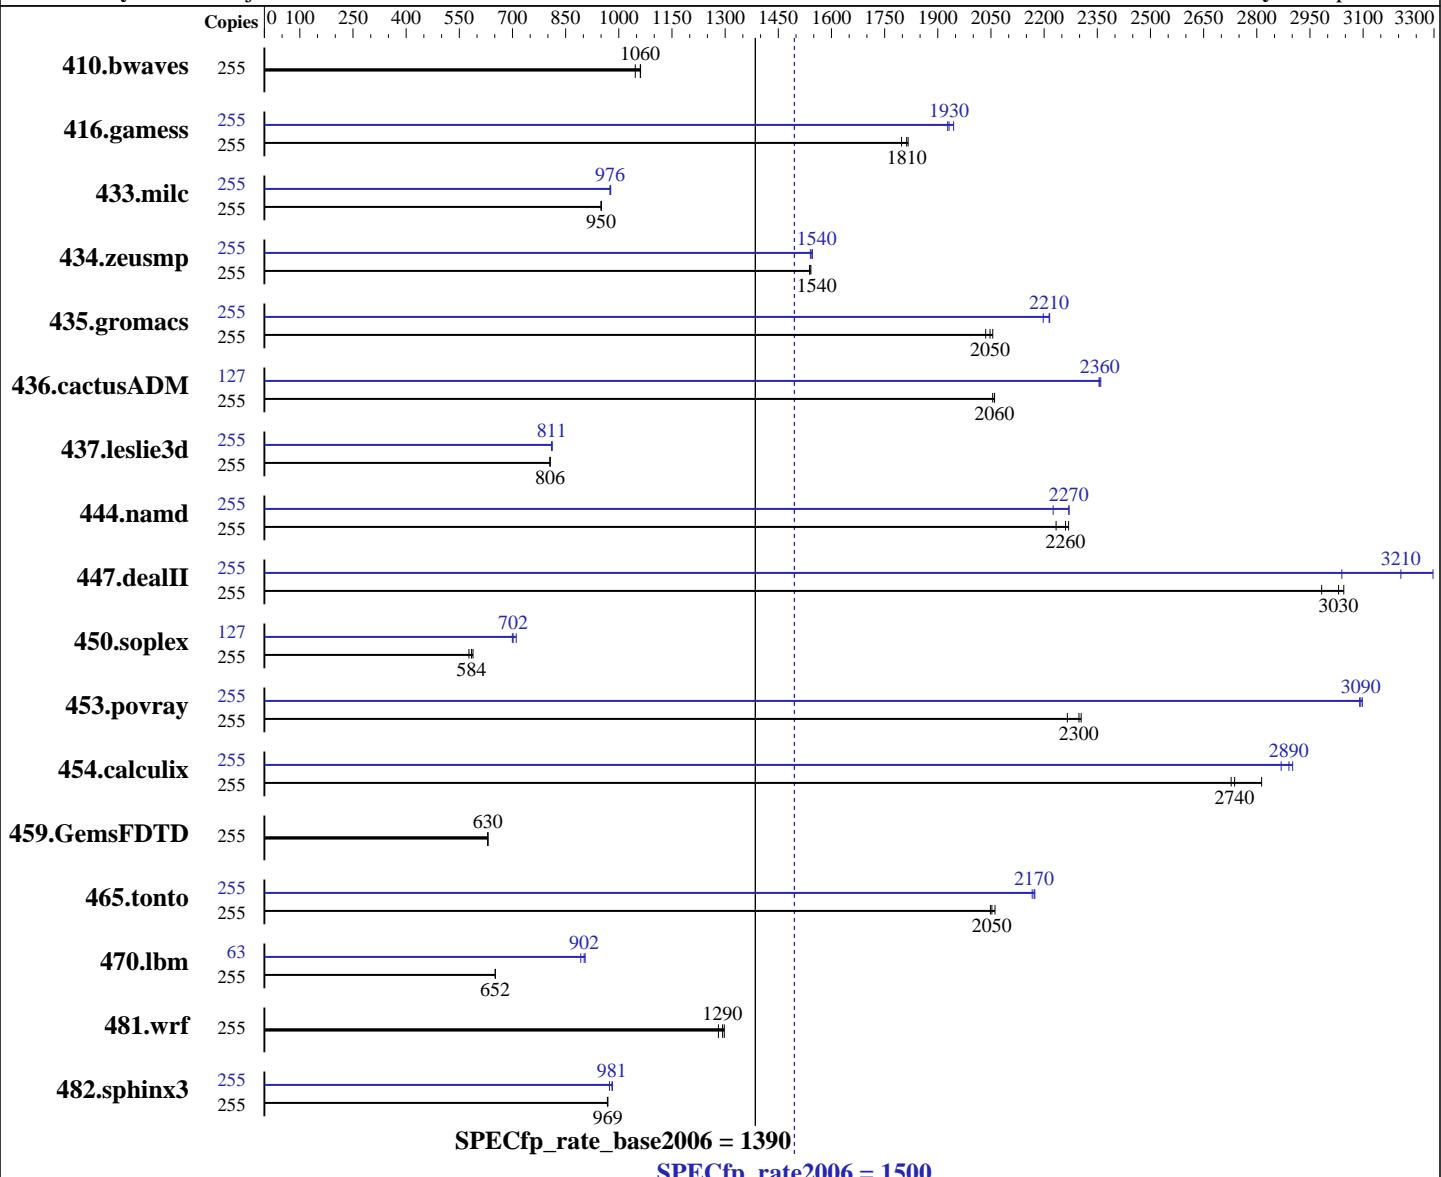

Hardware

CPU Name: SPARC64 VII+
CPU Characteristics:
CPU MHz: 3000
FPU: Integrated
CPU(s) enabled: 128 cores, 32 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 to 8 CMUs; each CMU contains 2 or 4 CPU chips
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip

Software

Operating System: Oracle Solaris 10 9/10
Compiler: Oracle Solaris Studio 12.2
Auto Parallel: No
File System: zfs
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | |
|-----------------------------------|------------------------------------|
| Fujitsu SPARC Enterprise M9000 | SPECfp_rate2006 = 1500 |
| | SPECfp_rate_base2006 = 1390 |

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

L3 Cache: None
Other Cache: None
Memory: 976 GB (32 x 2 GB + 228 x 4 GB, 8-way interleaved)
Disk Subsystem: 6 x 300 GB 10,000 RPM SAS
Other Hardware: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 255 | 3267 | 1060 | 3312 | 1050 | 3265 | 1060 | 255 | 3267 | 1060 | 3312 | 1050 | 3265 | 1060 |
| 416.gamess | 255 | 2749 | 1820 | 2755 | 1810 | 2777 | 1800 | 255 | 2567 | 1940 | 2590 | 1930 | 2585 | 1930 |
| 433.milc | 255 | 2463 | 951 | 2463 | 950 | 2464 | 950 | 255 | 2399 | 976 | 2400 | 975 | 2396 | 977 |
| 434.zeusmp | 255 | 1505 | 1540 | 1508 | 1540 | 1509 | 1540 | 255 | 1506 | 1540 | 1501 | 1550 | 1502 | 1540 |
| 435.gromacs | 255 | 895 | 2040 | 889 | 2050 | 886 | 2060 | 255 | 822 | 2210 | 829 | 2200 | 822 | 2220 |
| 436.cactusADM | 255 | 1479 | 2060 | 1483 | 2050 | 1480 | 2060 | 127 | 643 | 2360 | 644 | 2350 | 644 | 2360 |
| 437.leslie3d | 255 | 2973 | 806 | 2974 | 806 | 2974 | 806 | 255 | 2953 | 812 | 2957 | 810 | 2954 | 811 |
| 444.namd | 255 | 905 | 2260 | 901 | 2270 | 916 | 2230 | 255 | 901 | 2270 | 919 | 2230 | 901 | 2270 |
| 447.dealII | 255 | 958 | 3050 | 978 | 2980 | 963 | 3030 | 255 | 885 | 3300 | 960 | 3040 | 910 | 3210 |
| 450.soplex | 255 | 3685 | 577 | 3640 | 584 | 3613 | 589 | 127 | 1514 | 700 | 1491 | 711 | 1509 | 702 |
| 453.povray | 255 | 589 | 2300 | 590 | 2300 | 599 | 2270 | 255 | 439 | 3090 | 438 | 3100 | 439 | 3090 |
| 454.calculix | 255 | 768 | 2740 | 771 | 2730 | 748 | 2810 | 255 | 728 | 2890 | 725 | 2900 | 733 | 2870 |
| 459.GemsFDTD | 255 | 4290 | 631 | 4293 | 630 | 4291 | 630 | 255 | 4290 | 631 | 4293 | 630 | 4291 | 630 |
| 465.tonto | 255 | 1225 | 2050 | 1222 | 2050 | 1217 | 2060 | 255 | 1158 | 2170 | 1154 | 2170 | 1155 | 2170 |
| 470.lbm | 255 | 5376 | 652 | 5378 | 651 | 5377 | 652 | 63 | 959 | 902 | 956 | 905 | 970 | 893 |
| 481.wrf | 255 | 2223 | 1280 | 2203 | 1290 | 2195 | 1300 | 255 | 2223 | 1280 | 2203 | 1290 | 2195 | 1300 |
| 482.sphinx3 | 255 | 5135 | 968 | 5130 | 969 | 5130 | 969 | 255 | 5061 | 982 | 5068 | 981 | 5105 | 973 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
118683-05 119963-20 120753-08

Oracle Solaris Studio 12.2 and patches are available at
<http://oracle.com/goto/solarisstudio>

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdcxx.apache.org/download.html> using:

```
alias gmake=specmake
gmake BUILDTYPE=8d CONFIG=sunpro.config
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | |
|-----------------------------------|---|
| Fujitsu SPARC Enterprise M9000 | SPECfp_rate2006 = 1500 SPECfp_rate_base2006 = 1390 |
|-----------------------------------|---|

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

Submit Notes

The config file option 'submit' was used. Processes were assigned to specific processors using 'pbind' commands. The list of processors to use was provided in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

```
ulimit -s 131072 was used to limit the space consumed  
by the stack.(making more space available for the heap)
```

System Tunables (/etc/system parameters):

```
autooup=600  
    Causes pages older than the listed number of seconds to  
    be written by fsflush.  
zfs:zfs_arc_max = 0x10000000  
    Control the amount of memory used by ZFS for caching  
lpg_alloc_prefer=1  
    Prefer local pages, even if not easily available  
bufhwm=40000000  
    Memory byte limit for caching I/O buffers.
```

Other System Settings:

The webconsole service was turned off using
svcadm disable webconsole

Platform Notes

Memory is 8-way interleaved by filling each CMU's slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M9000 server from Fujitsu. The SPARC Enterprise M9000 server from Oracle and from Fujitsu are electrically equivalent.

General Notes

447.dealII (peak): "apache_stdcxx_4_2_1" src.alt was used.

447.dealII (base): "apache_stdcxx_4_2_1" src.alt was used.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | |
|-----------------------------------|---|
| Fujitsu SPARC Enterprise M9000 | SPECfp_rate2006 = 1500 SPECfp_rate_base2006 = 1390 |
|-----------------------------------|---|

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Base Optimization Flags

C benchmarks:

```
-fast -xipo=2 -xpagesize=4M -fma=fused -xlinkopt -xvector  
-xalias_level=std -xprefetch_auto_type=indirect_array_access  
-xprefetch_level=1 -ll2amm
```

C++ benchmarks:

```
-xdepend -fast -xipo=2 -xpagesize=4M -fma=fused -xlinkopt -xvector  
-xalias_level=compatible -xprefetch_level=1 -library=no%Cstd  
-I/mnt/spec//stdcxx-4.2.1/include  
-I/mnt/spec//stdcxx-4.2.1/build/include -ll2amm  
-L/mnt/spec//stdcxx-4.2.1/build/lib -R/mnt/spec//stdcxx-4.2.1/build/lib  
-lstd8d
```

Fortran benchmarks:

```
-fast -xipo=2 -xpagesize=4M -fma=fused -xlinkopt -xvector  
-xprefetch_level=2 -ll2amm
```

Benchmarks using both Fortran and C:

```
-fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -fma=fused -xlinkopt  
-xvector -xalias_level=std -xprefetch_auto_type=indirect_array_access  
-xprefetch_level=1 -xprefetch_level=2 -ll2amm
```

Base Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version

Fortran benchmarks:

-xjobs=16 -V -v

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | |
|-----------------------------------|---|
| Fujitsu SPARC Enterprise M9000 | SPECfp_rate2006 = 1500 SPECfp_rate_base2006 = 1390 |
|-----------------------------------|---|

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-xjobs=16 -V -# -v

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Peak Optimization Flags

C benchmarks:

```
433.milc: -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xipo=2
           -xpagesize=4M -fma=fused -xarch=generic -fsimple=1
           -W2,-Ainline:rs=400 -xalias_level=std
           -xprefetch_auto_type=indirect_array_access -xprefetch_level=2
```

```
470.lbm: -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xrestrict -xipo=2
           -xprefetch_level=2 -xarch=v8plusb -xcache=generic -ll2amm
```

```
482.sphinx3: -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xipo=2
              -xpagesize=4M -fma=fused -lfast -ll2amm
```

C++ benchmarks:

```
444.namd: -xdepend -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xipo=2
           -xpagesize=4M -fma=fused -xalias_level=compatible
           -library=stlport4 -xipo=1 -xlinkopt=2 -xprefetch=no%auto
           -xunroll=2 -ll2amm -lfast
```

```
447.dealII: -xdepend -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xpagesize=4M -fma=fused -xalias_level=compatible
             -library=no%Cstd -I/mnt/spec//stdcxx-4.2.1/include
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | |
|-----------------------------------|---|
| Fujitsu SPARC Enterprise M9000 | SPECfp_rate2006 = 1500 SPECfp_rate_base2006 = 1390 |
|-----------------------------------|---|

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

Peak Optimization Flags (Continued)

447.dealII (continued):

```
-I /mnt/spec//stdcxx-4.2.1/build/include
-xprefetch_auto_type=indirect_array_access -xrestrict
-xchip=generic -xunroll=4
-L /mnt/spec//stdcxx-4.2.1/build/lib
-R /mnt/spec//stdcxx-4.2.1/build/lib -lstd8d
```

450.soplex: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible
-library=stlport4 -xvector -xlinkopt=2 -xprefetch=no%auto
-xarch=generic

453.povray: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible
-library=stlport4 -x04 -xunroll=4 -xprefetch=no%auto
-lfast

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xprefetch=no%auto -x03

434.zeusmp: -fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch_level=2
-ll2amm

437.leslie3d: -fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch=latx:5.0
-ll2amm

459.GemsFDTD: basepeak = yes

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xprefetch=no%auto -x04
-xunroll=3 -lfast

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -xpagesize=4M -fma=fused -xvector -xinline=
-xchip=generic -fsimple=0 -xunroll=7 -xprefetch=no%auto

436.cactusADM: -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -fma=fused

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

| | |
|-----------------------------------|---|
| Fujitsu SPARC Enterprise M9000 | SPECfp_rate2006 = 1500 SPECfp_rate_base2006 = 1390 |
|-----------------------------------|---|

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

Peak Optimization Flags (Continued)

454.calculix: -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -fma=fused
-xvector -xunroll=8 -xprefetch=latx:3 -xalias_level=std

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version

Fortran benchmarks:

-xjobs=16 -V -v

Benchmarks using both Fortran and C:

-xjobs=16 -V -# -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:46:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 December 2010.