



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 226

ProLiant BL460c G7
(3.20 GHz, Intel Xeon X5672)

SPECfp_rate_base2006 = 219

CPU2006 license: 3


Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

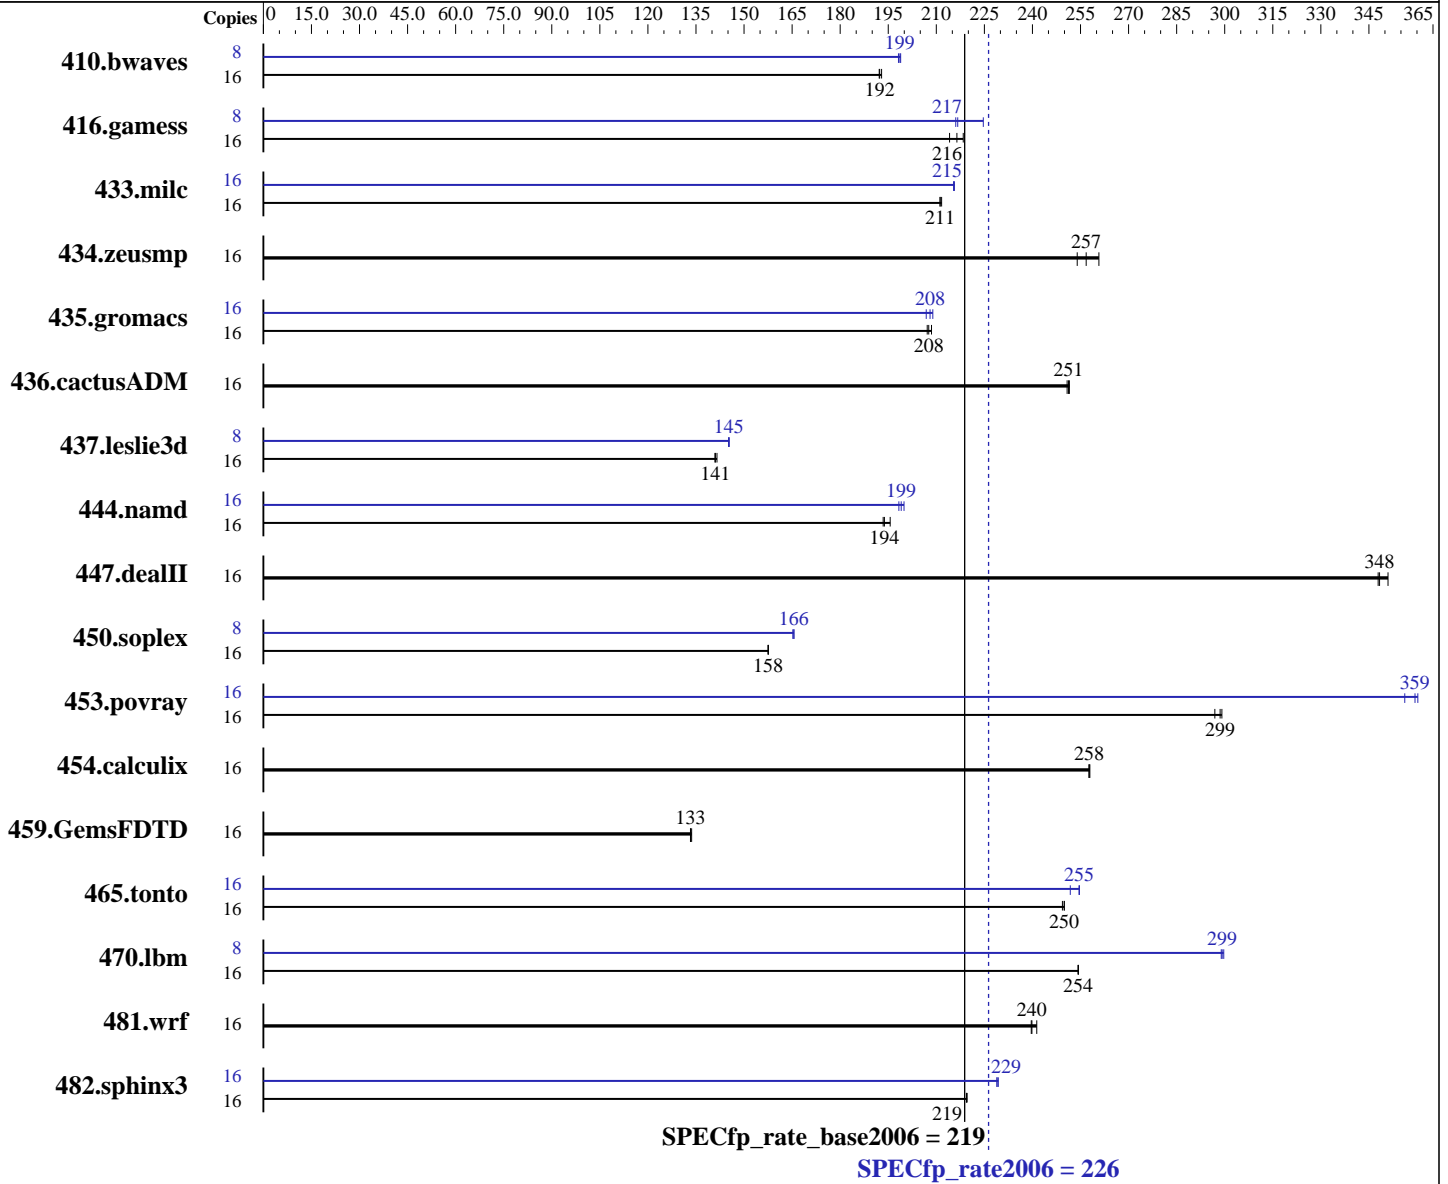

Hardware

CPU Name: Intel Xeon X5672
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 226

ProLiant BL460c G7
(3.20 GHz, Intel Xeon X5672)

SPECfp_rate_base2006 = 219

CPU2006 license: 3

Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 146 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1127	193	<u>1131</u>	<u>192</u>	1131	192	8	<u>547</u>	<u>199</u>	547	199	549	198		
416.gamess	16	1434	218	1463	214	<u>1448</u>	<u>216</u>	8	697	225	725	216	<u>723</u>	<u>217</u>		
433.milc	16	694	212	<u>695</u>	<u>211</u>	696	211	16	681	216	<u>682</u>	<u>215</u>	682	215		
434.zeusmp	16	<u>567</u>	<u>257</u>	558	261	573	254	16	<u>567</u>	<u>257</u>	558	261	573	254		
435.gromacs	16	548	209	<u>550</u>	<u>208</u>	551	207	16	547	209	552	207	<u>549</u>	<u>208</u>		
436.cactusADM	16	762	251	760	252	<u>761</u>	<u>251</u>	16	762	251	760	252	<u>761</u>	<u>251</u>		
437.leslie3d	16	1062	142	<u>1066</u>	<u>141</u>	1067	141	8	518	145	<u>518</u>	<u>145</u>	517	145		
444.namd	16	<u>662</u>	<u>194</u>	656	196	663	193	16	642	200	647	198	<u>645</u>	<u>199</u>		
447.dealII	16	526	348	522	351	<u>525</u>	<u>348</u>	16	526	348	522	351	<u>525</u>	<u>348</u>		
450.soplex	16	847	158	<u>847</u>	<u>158</u>	847	158	8	403	166	404	165	<u>403</u>	<u>166</u>		
453.povray	16	<u>285</u>	<u>299</u>	287	297	285	299	16	239	356	236	360	<u>237</u>	<u>359</u>		
454.calculix	16	512	258	512	258	<u>512</u>	<u>258</u>	16	512	258	512	258	<u>512</u>	<u>258</u>		
459.GemsFDTD	16	<u>1273</u>	<u>133</u>	1274	133	1270	134	16	<u>1273</u>	<u>133</u>	1274	133	1270	134		
465.tonto	16	630	250	631	249	<u>630</u>	<u>250</u>	16	625	252	<u>619</u>	<u>255</u>	618	255		
470.lbm	16	864	254	<u>864</u>	<u>254</u>	865	254	8	367	300	<u>367</u>	<u>299</u>	368	299		
481.wrf	16	<u>745</u>	<u>240</u>	746	240	740	241	16	<u>745</u>	<u>240</u>	746	240	740	241		
482.sphinx3	16	1420	220	1421	219	<u>1421</u>	<u>219</u>	16	1360	229	1362	229	<u>1362</u>	<u>229</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores.

Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 7200 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 226

ProLiant BL460c G7
(3.20 GHz, Intel Xeon X5672)

SPECfp_rate_base2006 = 219

CPU2006 license: 3

Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling
Data Reuse set to Disabled

General Notes

Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 226

ProLiant BL460c G7
(3.20 GHz, Intel Xeon X5672)

SPECfp_rate_base2006 = 219

CPU2006 license: 3

Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 226

ProLiant BL460c G7
(3.20 GHz, Intel Xeon X5672)

SPECfp_rate_base2006 = 219

CPU2006 license: 3

Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 226

ProLiant BL460c G7
(3.20 GHz, Intel Xeon X5672)

SPECfp_rate_base2006 = 219

CPU2006 license: 3

Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 15:52:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 March 2011.