



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint®\_rate2006 = 791

NovaScale R480 F2 (Intel Xeon E7-8837, 2.67 GHz)

SPECint\_rate\_base2006 = 743

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

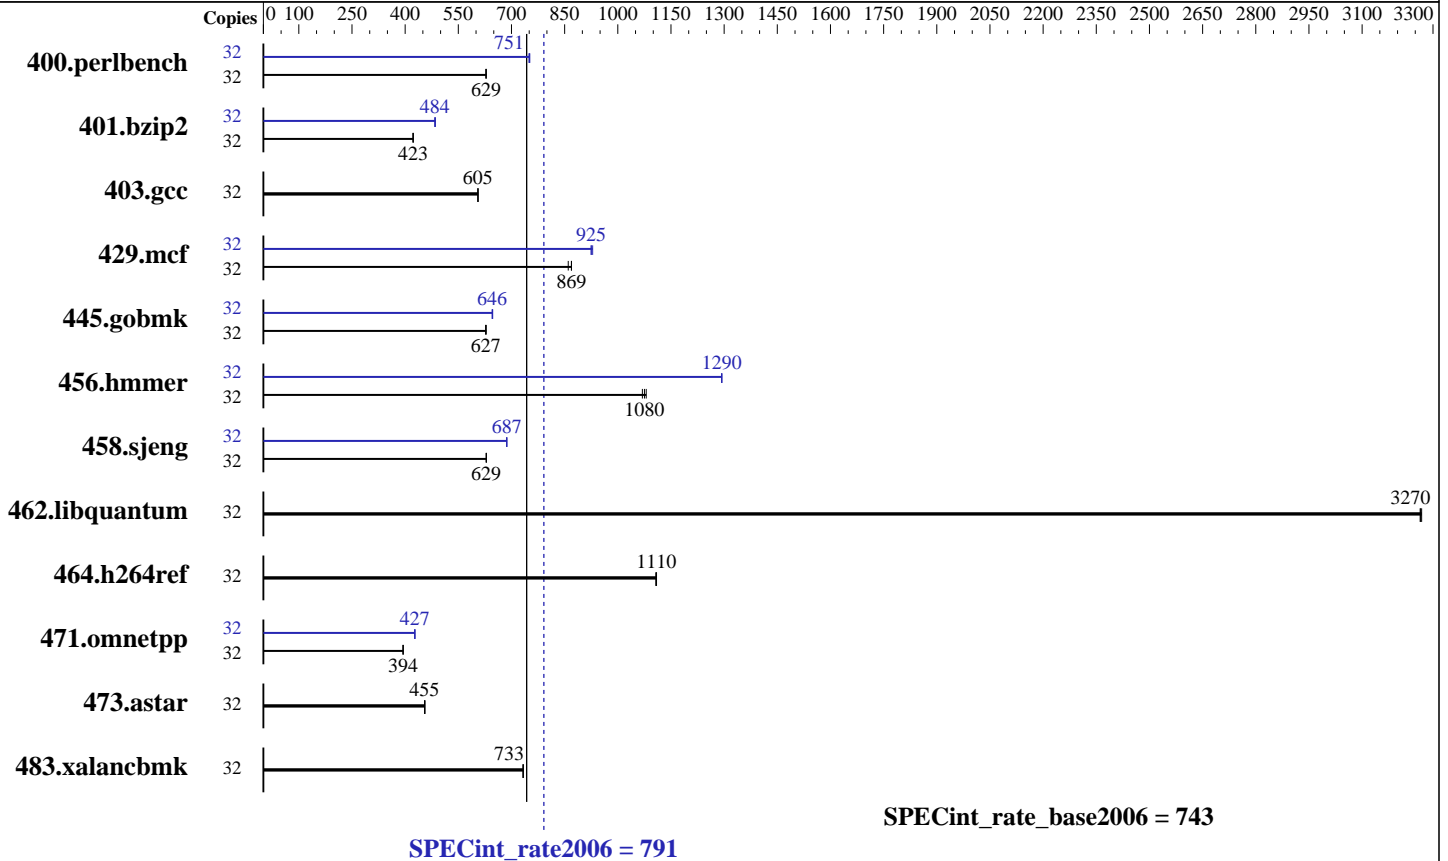

**Hardware**

CPU Name: Intel Xeon E7-8837  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (64 x 8 GB 4Rx8 PC3-8500R-7, ECC)  
 Disk Subsystem: 1 x 500 GB 7200 RPM SAS 6Gb  
 Other Hardware: None

**Software**

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 791

NovaScale R480 F2 (Intel Xeon E7-8837, 2.67 GHz)

SPECint\_rate\_base2006 = 743

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Mar-2011  
Hardware Availability: Apr-2011  
Software Availability: Apr-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>497</b>	<b>629</b>	498	628	497	629	32	<b>416</b>	<b>751</b>	417	749	416	752
401.bzip2	32	<b>730</b>	<b>423</b>	730	423	732	422	32	636	485	<b>638</b>	<b>484</b>	638	484
403.gcc	32	<b>426</b>	<b>605</b>	426	605	425	606	32	<b>426</b>	<b>605</b>	426	605	425	606
429.mcf	32	339	860	336	869	<b>336</b>	<b>869</b>	32	<b>315</b>	<b>925</b>	314	929	316	925
445.gobmk	32	535	627	<b>535</b>	<b>627</b>	534	629	32	<b>520</b>	<b>646</b>	520	646	519	647
456.hammer	32	276	1080	<b>278</b>	<b>1080</b>	279	1070	32	231	1290	<b>231</b>	<b>1290</b>	231	1290
458.sjeng	32	616	629	615	629	<b>616</b>	<b>629</b>	32	564	687	<b>564</b>	<b>687</b>	564	686
462.libquantum	32	<b>203</b>	<b>3270</b>	203	3270	203	3260	32	<b>203</b>	<b>3270</b>	203	3270	203	3260
464.h264ref	32	638	1110	640	1110	<b>639</b>	<b>1110</b>	32	638	1110	640	1110	<b>639</b>	<b>1110</b>
471.omnetpp	32	<b>507</b>	<b>394</b>	507	394	508	394	32	468	427	<b>468</b>	<b>427</b>	468	428
473.astar	32	<b>494</b>	<b>455</b>	493	456	494	455	32	<b>494</b>	<b>455</b>	493	456	494	455
483.xalancbmk	32	<b>301</b>	<b>733</b>	301	733	301	733	32	<b>301</b>	<b>733</b>	301	733	301	733

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 28800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R910 model. Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 791**

NovaScale R480 F2 (Intel Xeon E7-8837, 2.67 GHz)

**SPECint\_rate\_base2006 = 743**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Mar-2011  
**Hardware Availability:** Apr-2011  
**Software Availability:** Apr-2011

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 791

NovaScale R480 F2 (Intel Xeon E7-8837, 2.67 GHz)

SPECint\_rate\_base2006 = 743

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Mar-2011  
Hardware Availability: Apr-2011  
Software Availability: Apr-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 791**

NovaScale R480 F2 (Intel Xeon E7-8837, 2.67 GHz)

**SPECint\_rate\_base2006 = 743**

**CPU2006 license:** 20

**Test date:** Mar-2011

**Test sponsor:** Bull SAS

**Hardware Availability:** Apr-2011

**Tested by:** Dell Inc.

**Software Availability:** Apr-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:12:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 April 2011.