



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 137

Express5800/GT110d (Intel Xeon E3-1220)

SPECint_rate_base2006 = 130

CPU2006 license: 9006


Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

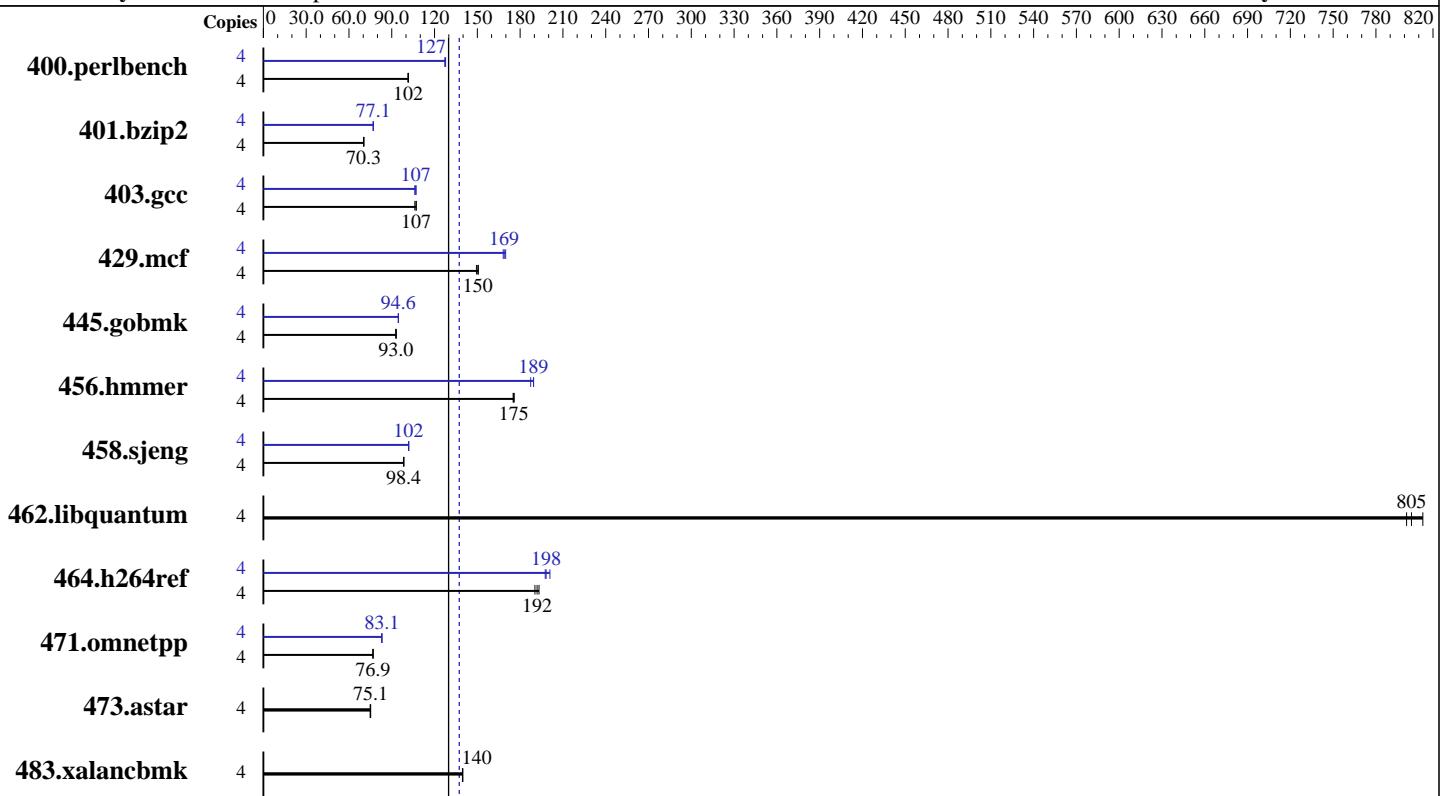

SPECint_rate_base2006 = 130

SPECint_rate2006 = 137

Hardware

CPU Name: Intel Xeon E3-1220
CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz: 3100
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
Disk Subsystem: 1 x 160 GB SATA, 7200 RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler: Intel C++ Compiler XE for applications running on IA32, Version 12.0.3.174 Build 20110309
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110d (Intel Xeon E3-1220)

SPECint_rate2006 = 137

CPU2006 license: 9006

Test date: May-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	385	101	385	102	384	102	4	307	127	307	127	306	128
401.bzip2	4	549	70.3	549	70.3	547	70.5	4	501	77.1	501	77.1	501	77.0
403.gcc	4	303	106	301	107	300	107	4	302	107	303	106	301	107
429.mcf	4	244	149	242	151	243	150	4	215	170	217	168	216	169
445.gobmk	4	451	93.1	451	93.0	452	92.8	4	443	94.6	443	94.6	443	94.7
456.hmmer	4	212	176	213	175	213	175	4	197	189	199	187	197	189
458.sjeng	4	492	98.4	492	98.4	492	98.4	4	475	102	475	102	475	102
462.libquantum	4	103	801	102	813	103	805	4	103	801	102	813	103	805
464.h264ref	4	465	190	458	193	461	192	4	441	201	447	198	448	198
471.omnetpp	4	325	76.9	325	76.9	325	76.8	4	301	83.1	301	83.0	301	83.1
473.astar	4	375	74.8	374	75.1	373	75.2	4	375	74.8	374	75.1	373	75.2
483.xalancbmk	4	198	140	198	140	197	140	4	198	140	198	140	197	140

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Huge pages were not configured for this run

Platform Notes

Default BIOS settings were used.

General Notes

The Express5800/GT110d (Intel Xeon E3-1220) and
the Express5800/GT110d-S (Intel Xeon E3-1220) models are electronically equivalent.
The results have been measured on the Express5800/GT110d-S (Intel Xeon E3-1220) model.

Base Compiler Invocation

C benchmarks:

icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110d (Intel Xeon E3-1220)

SPECint_rate2006 = 137

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Mar-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110d (Intel Xeon E3-1220)

SPECint_rate2006 = 137

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Mar-2011

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -prof-use(pass 2)
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
  -auto-ilp32 -ansi-alias
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xAVX -ipo -O3 -no-prec-div
  -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
  -auto-ilp32

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
  -ansi-alias -auto-ilp32

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
  -auto-ilp32
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
  -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
  -opt-ra-region-strategy=block -Wl,-z,muldefs
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110d (Intel Xeon E3-1220)

SPECint_rate2006 = 137

SPECint_rate_base2006 = 130

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Mar-2011

Peak Optimization Flags (Continued)

471.omnetpp (continued):

-L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:49:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 June 2011.