



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECint<sup>®</sup>\_rate2006 = 134

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint\_rate\_base2006 = 127

CPU2006 license: 13


Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

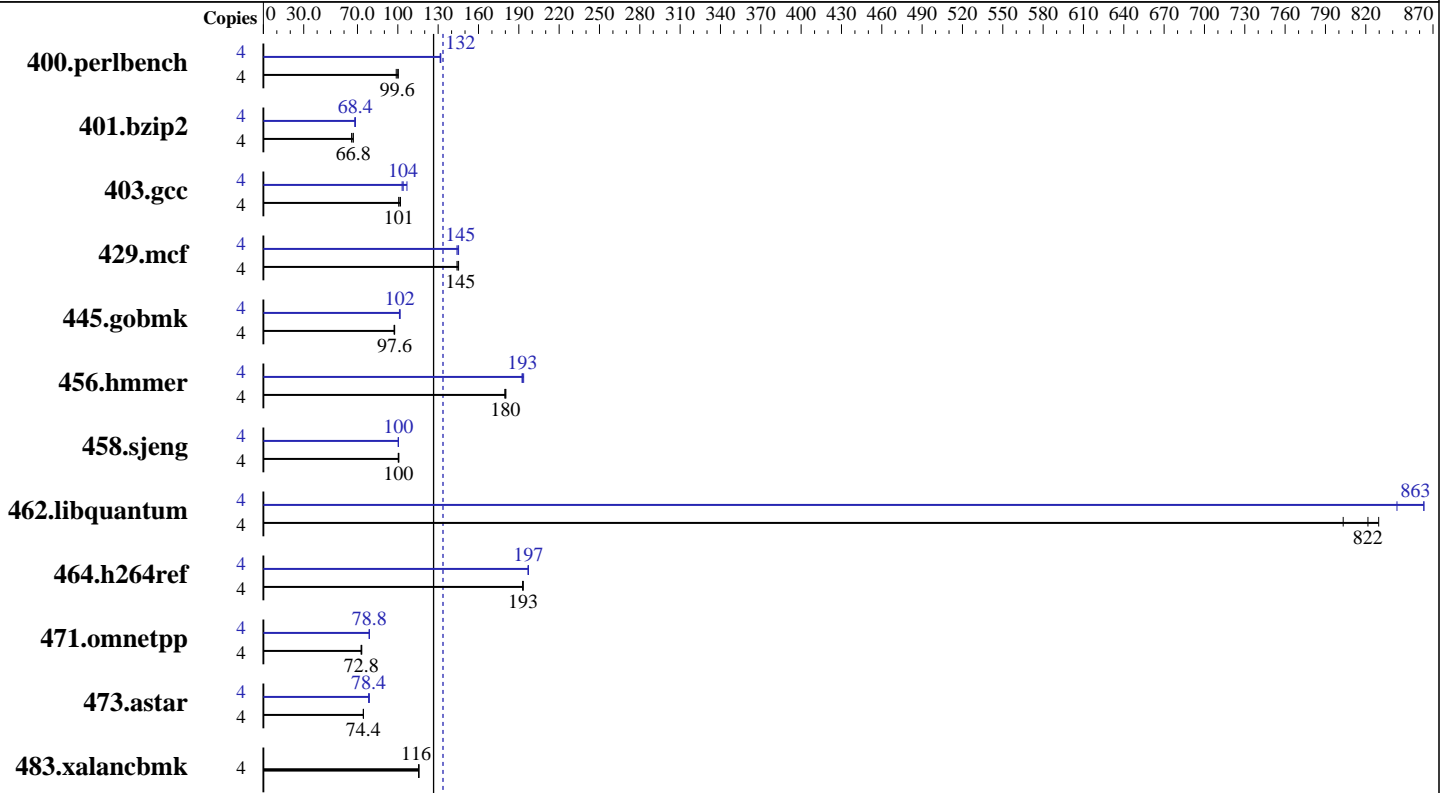

SPECint\_rate2006 = 134

SPECint\_rate\_base2006 = 127

### Hardware

CPU Name: Intel Core i5-2500  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.7 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)  
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Windows 7 Ultimate (64-bit)  
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309  
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 134

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint\_rate\_base2006 = 127

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	390	100	<u>393</u>	<u>99.6</u>	396	98.8	4	296	132	<u>297</u>	<u>132</u>	297	132
401.bzip2	4	589	65.6	<u>579</u>	<u>66.8</u>	578	66.8	4	568	68.0	<u>566</u>	<u>68.4</u>	565	68.4
403.gcc	4	315	102	320	101	<u>320</u>	<u>101</u>	4	<u>309</u>	<u>104</u>	312	103	302	107
429.mcf	4	251	145	<u>252</u>	<u>145</u>	253	144	4	<u>252</u>	<u>145</u>	253	144	252	145
445.gobmk	4	431	97.2	<u>429</u>	<u>97.6</u>	429	97.6	4	412	102	415	101	<u>414</u>	<u>102</u>
456.hammer	4	208	180	207	180	<u>207</u>	<u>180</u>	4	<u>193</u>	<u>193</u>	194	192	193	194
458.sjeng	4	482	100	481	101	<u>481</u>	<u>100</u>	4	<u>482</u>	<u>100</u>	483	100	482	100
462.libquantum	4	103	803	<u>101</u>	<u>822</u>	99.9	830	4	98.3	843	96.0	863	<u>96.0</u>	<u>863</u>
464.h264ref	4	459	193	<u>459</u>	<u>193</u>	459	193	4	449	197	<u>449</u>	<u>197</u>	449	197
471.omnetpp	4	343	72.8	342	73.2	<u>343</u>	<u>72.8</u>	4	318	78.8	317	78.8	<u>318</u>	<u>78.8</u>
473.astar	4	378	74.4	378	74.4	<u>378</u>	<u>74.4</u>	4	357	78.8	358	78.4	<u>358</u>	<u>78.4</u>
483.xalancbmk	4	239	116	239	116	<u>239</u>	<u>116</u>	4	239	116	239	116	<u>239</u>	<u>116</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

## General Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

## Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
483.xalancbmk: -Qoption, cpp, --no_wchar_t_keyword
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 134

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint\_rate\_base2006 = 127

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

## Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc9 -Qstd=c99

456.hmmr: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe  
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc9

473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32

456.hmmr: -DSPEC\_CPU\_P64

458.sjeng: -DSPEC\_CPU\_P64

462.libquantum: -DSPEC\_CPU\_P64

464.h264ref: -DWIN32 -DSPEC\_CPU\_NO\_INTTYPES

473.astar: -DSPEC\_CPU\_P64

483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 134

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint\_rate\_base2006 = 127

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Optimization Flags

C benchmarks:

400.perlbench: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000  
shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxAVX(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

458.sjeng: -Qauto-ilp32 -QxAVX(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4  
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000

464.h264ref: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib  
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000 shlW64M.lib  
-link /FORCE:MULTIPLE

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 134

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint\_rate\_base2006 = 127

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

456.hmmer: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 23:43:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 August 2011.