



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = **65.5**

Express5800/R120b-2 (Intel Xeon X5690)

SPECfp_base2006 = **61.6**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Mar-2011

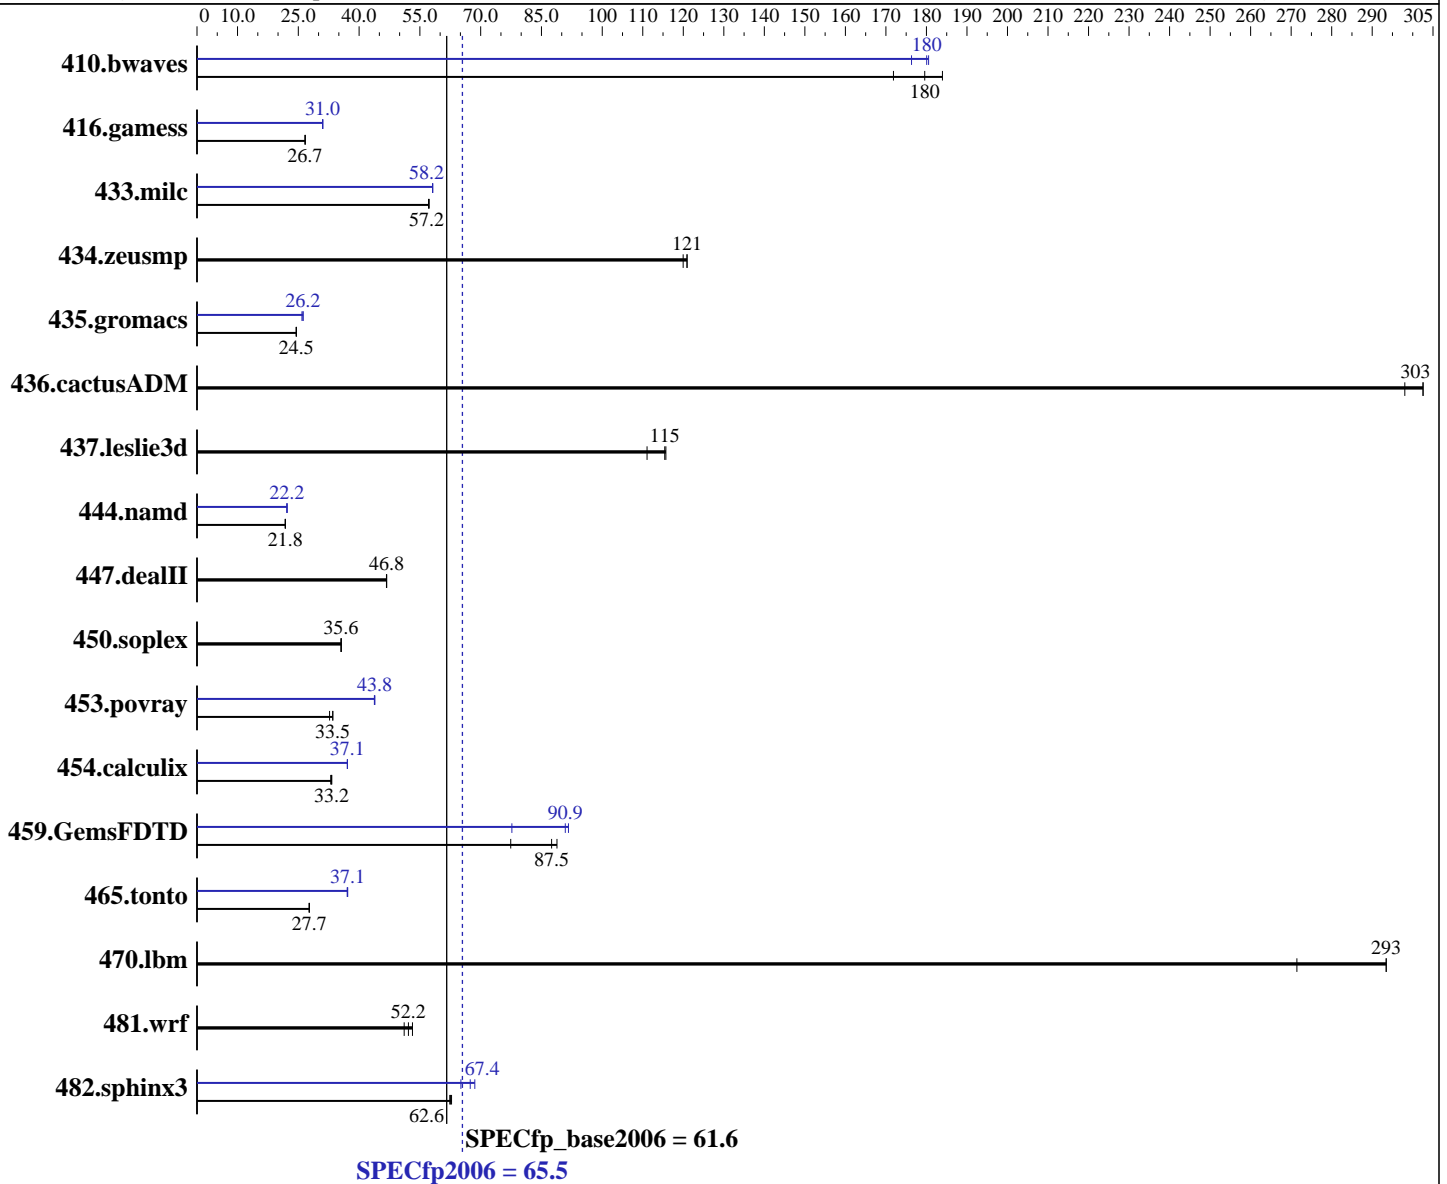

Hardware

CPU Name: Intel Xeon X5690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
 CPU MHz: 3467
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64, Version 12.0.3.174 Build 20110309
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **65.5**

Express5800/R120b-2 (Intel Xeon X5690)

SPECfp_base2006 = **61.6**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Mar-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>75.7</u>	<u>180</u>	79.1	172	73.9	184	75.3	181	<u>75.5</u>	<u>180</u>	77.1	176
416.gamess	733	26.7	734	26.7	<u>734</u>	<u>26.7</u>	631	31.0	632	31.0	<u>631</u>	<u>31.0</u>
433.milc	<u>160</u>	<u>57.2</u>	161	57.1	160	57.2	<u>158</u>	<u>58.2</u>	158	58.1	158	58.2
434.zeusmp	<u>75.3</u>	<u>121</u>	75.9	120	75.3	121	<u>75.3</u>	<u>121</u>	75.9	120	75.3	121
435.gromacs	292	24.5	<u>291</u>	<u>24.5</u>	291	24.5	<u>273</u>	<u>26.2</u>	273	26.2	276	25.9
436.cactusADM	40.1	298	39.5	303	<u>39.5</u>	<u>303</u>	40.1	298	39.5	303	<u>39.5</u>	<u>303</u>
437.leslie3d	84.6	111	<u>81.4</u>	<u>115</u>	81.2	116	84.6	111	<u>81.4</u>	<u>115</u>	81.2	116
444.namd	368	21.8	<u>368</u>	<u>21.8</u>	368	21.8	<u>361</u>	<u>22.2</u>	362	22.2	361	22.2
447.dealII	<u>245</u>	<u>46.8</u>	245	46.8	244	46.8	<u>245</u>	<u>46.8</u>	245	46.8	244	46.8
450.soplex	234	35.6	235	35.6	<u>235</u>	<u>35.6</u>	234	35.6	235	35.6	<u>235</u>	<u>35.6</u>
453.povray	163	32.7	<u>159</u>	<u>33.5</u>	159	33.5	121	43.9	122	43.8	<u>121</u>	<u>43.8</u>
454.calculix	250	33.0	248	33.3	<u>248</u>	<u>33.2</u>	<u>222</u>	<u>37.1</u>	222	37.1	222	37.1
459.GemsFDTD	119	88.8	137	77.4	<u>121</u>	<u>87.5</u>	116	91.7	<u>117</u>	<u>90.9</u>	137	77.7
465.tonto	356	27.7	355	27.7	<u>355</u>	<u>27.7</u>	265	37.2	266	37.1	<u>265</u>	<u>37.1</u>
470.lbm	46.8	293	50.6	271	<u>46.8</u>	<u>293</u>	46.8	293	50.6	271	<u>46.8</u>	<u>293</u>
481.wrf	<u>214</u>	<u>52.2</u>	218	51.1	210	53.2	<u>214</u>	<u>52.2</u>	218	51.1	210	53.2
482.sphinx3	310	62.8	<u>311</u>	<u>62.6</u>	312	62.4	299	65.1	284	68.6	<u>289</u>	<u>67.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 1800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Hyper-Threading Technology: Disabled
Performance/Watt: Traditional
Server Class: Custom
Data Reuse Optimization: Disabled
Memory Voltage: Normal



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	65.5
Express5800/R120b-2 (Intel Xeon X5690)	SPECfp_base2006 =	61.6

CPU2006 license: 9006	Test date: Jun-2011
Test sponsor: NEC Corporation	Hardware Availability: Feb-2011
Tested by: NEC Corporation	Software Availability: Mar-2011

General Notes

OMP_NUM_THREADS set to number of cores
 The Express5800/R120b-1 and
 the Express5800/R120b-2 models are electronically equivalent.
 The results have been measured on the Express5800/R120b-1 model.

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	65.5
Express5800/R120b-2 (Intel Xeon X5690)	SPECfp_base2006 =	61.6

CPU2006 license: 9006	Test date: Jun-2011
Test sponsor: NEC Corporation	Hardware Availability: Feb-2011
Tested by: NEC Corporation	Software Availability: Mar-2011

Base Optimization Flags (Continued)

C++ benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

Peak Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
 -parallel

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 65.5

Express5800/R120b-2 (Intel Xeon X5690)

SPECfp_base2006 = 61.6

CPU2006 license: 9006

Test date: Jun-2011

Test sponsor: NEC Corporation

Hardware Availability: Feb-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	65.5
Express5800/R120b-2 (Intel Xeon X5690)	SPECfp_base2006 =	61.6

CPU2006 license: 9006	Test date: Jun-2011
Test sponsor: NEC Corporation	Hardware Availability: Feb-2011
Tested by: NEC Corporation	Software Availability: Mar-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 23:37:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 August 2011.