



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp<sup>®</sup>2006 = **59.1**

NovaScale T860 F2 (Intel Xeon X5660, 2.80 GHz)

SPECfp\_base2006 = **55.7**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jun-2011

Hardware Availability: Mar-2010

Software Availability: Apr-2011

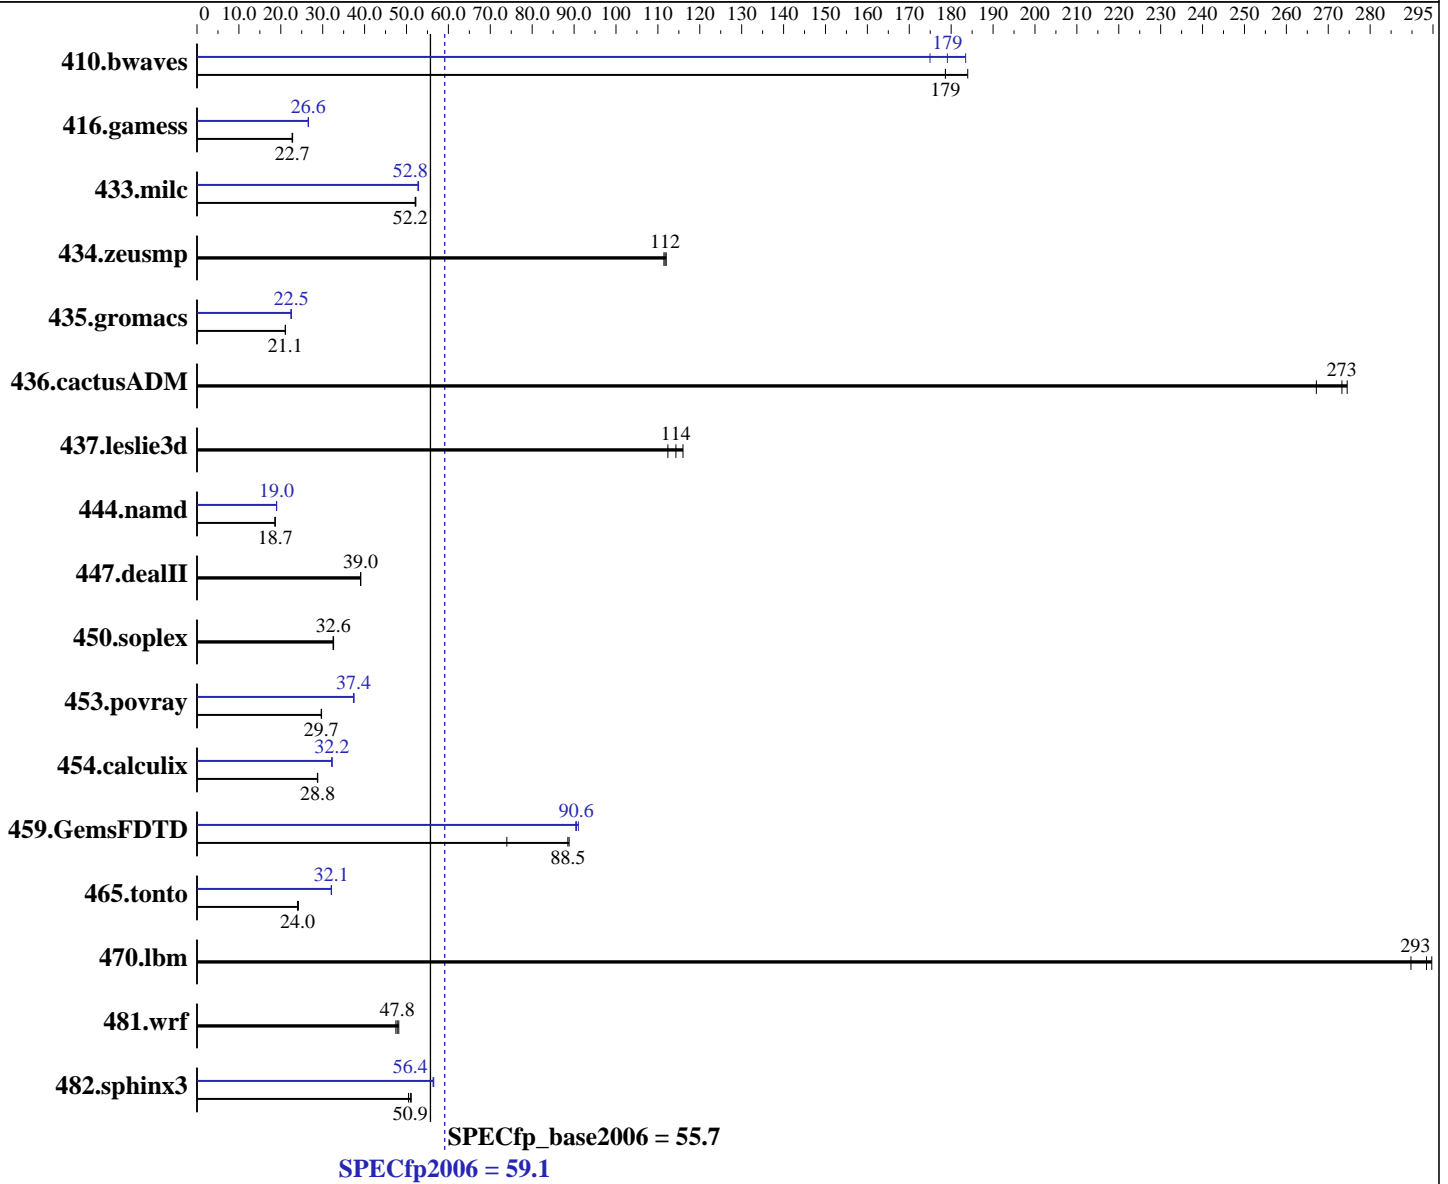

### Hardware

CPU Name: Intel Xeon X5660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = **59.1**

NovaScale T860 F2 (Intel Xeon X5660, 2.80 GHz)

SPECfp\_base2006 = **55.7**

CPU2006 license: 20

Test date: Jun-2011

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Apr-2011

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	73.9	184	<b><u>76.1</u></b>	<b><u>179</u></b>	76.1	179	<b><u>75.9</u></b>	<b><u>179</u></b>	74.1	183	77.7	175
416.gamess	858	22.8	861	22.7	<b><u>861</u></b>	<b><u>22.7</u></b>	738	26.5	736	26.6	<b><u>736</u></b>	<b><u>26.6</u></b>
433.milc	176	52.2	<b><u>176</u></b>	<b><u>52.2</u></b>	176	52.1	<b><u>174</u></b>	<b><u>52.8</u></b>	174	52.8	174	52.9
434.zeusmp	<b><u>81.5</u></b>	<b><u>112</u></b>	81.3	112	81.7	111	<b><u>81.5</u></b>	<b><u>112</u></b>	81.3	112	81.7	111
435.gromacs	338	21.1	339	21.1	<b><u>338</u></b>	<b><u>21.1</u></b>	<b><u>318</u></b>	<b><u>22.5</u></b>	317	22.5	318	22.5
436.cactusADM	<b><u>43.7</u></b>	<b><u>273</u></b>	43.5	275	44.7	267	<b><u>43.7</u></b>	<b><u>273</u></b>	43.5	275	44.7	267
437.leslie3d	<b><u>82.2</u></b>	<b><u>114</u></b>	81.0	116	83.6	112	<b><u>82.2</u></b>	<b><u>114</u></b>	81.0	116	83.6	112
444.namd	430	18.7	<b><u>430</u></b>	<b><u>18.7</u></b>	431	18.6	422	19.0	423	19.0	<b><u>422</u></b>	<b><u>19.0</u></b>
447.dealII	293	39.1	<b><u>293</u></b>	<b><u>39.0</u></b>	293	39.0	293	39.1	<b><u>293</u></b>	<b><u>39.0</u></b>	293	39.0
450.soplex	256	32.6	257	32.5	<b><u>256</u></b>	<b><u>32.6</u></b>	256	32.6	257	32.5	<b><u>256</u></b>	<b><u>32.6</u></b>
453.povray	179	29.7	179	29.7	<b><u>179</u></b>	<b><u>29.7</u></b>	142	37.4	142	37.5	<b><u>142</u></b>	<b><u>37.4</u></b>
454.calculix	<b><u>287</u></b>	<b><u>28.8</u></b>	286	28.8	287	28.7	256	32.2	<b><u>256</u></b>	<b><u>32.2</u></b>	256	32.2
459.GemsFDTD	<b><u>120</u></b>	<b><u>88.5</u></b>	143	74.0	119	88.8	117	90.4	117	91.0	<b><u>117</u></b>	<b><u>90.6</u></b>
465.tonto	406	24.2	<b><u>410</u></b>	<b><u>24.0</u></b>	410	24.0	307	32.1	307	32.1	<b><u>307</u></b>	<b><u>32.1</u></b>
470.lbm	<b><u>46.8</u></b>	<b><u>293</u></b>	47.4	290	46.6	295	<b><u>46.8</u></b>	<b><u>293</u></b>	47.4	290	46.6	295
481.wrf	235	47.5	<b><u>234</u></b>	<b><u>47.8</u></b>	232	48.2	235	47.5	<b><u>234</u></b>	<b><u>47.8</u></b>	232	48.2
482.sphinx3	<b><u>383</u></b>	<b><u>50.9</u></b>	386	50.5	381	51.1	<b><u>346</u></b>	<b><u>56.4</u></b>	346	56.4	345	56.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages  
 echo 900 > /proc/sys/vm/nr\_hugepages  
 export HUGETLB\_MORECORE=yes  
 export LD\_PRELOAD=/usr/lib64/libhugetlbfs.so

## Platform Notes

BIOS Settings:  
 Power Management = Maximum Performance (Default = Active Power Controller)  
 Data Reuse = Disabled (Default = Enabled)  
 Logical Processor = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = 59.1

NovaScale T860 F2 (Intel Xeon X5660, 2.80 GHz)

SPECfp\_base2006 = 55.7

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jun-2011

Hardware Availability: Mar-2010

Software Availability: Apr-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores  
Binaries were compiled on RHEL5.5  
The Dell PowerEdge T710 and  
the Bull NovaScale T860 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge T710 model

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 59.1**

NovaScale T860 F2 (Intel Xeon X5660, 2.80 GHz)

**SPECfp\_base2006 = 55.7**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jun-2011

**Hardware Availability:** Mar-2010

**Software Availability:** Apr-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

`470.lbm: basepeak = yes`

`482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 59.1**

NovaScale T860 F2 (Intel Xeon X5660, 2.80 GHz)

**SPECfp\_base2006 = 55.7**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jun-2011

**Hardware Availability:** Mar-2010

**Software Availability:** Apr-2011

## Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 59.1**

NovaScale T860 F2 (Intel Xeon X5660, 2.80 GHz)

**SPECfp\_base2006 = 55.7**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jun-2011

**Hardware Availability:** Mar-2010

**Software Availability:** Apr-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 22:54:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 August 2011.