



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.13 GHz, Intel Xeon E7-4830)

SPECint_rate2006 = 831

SPECint_rate_base2006 = 785

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2011

Hardware Availability: Apr-2011

Software Availability: Aug-2011

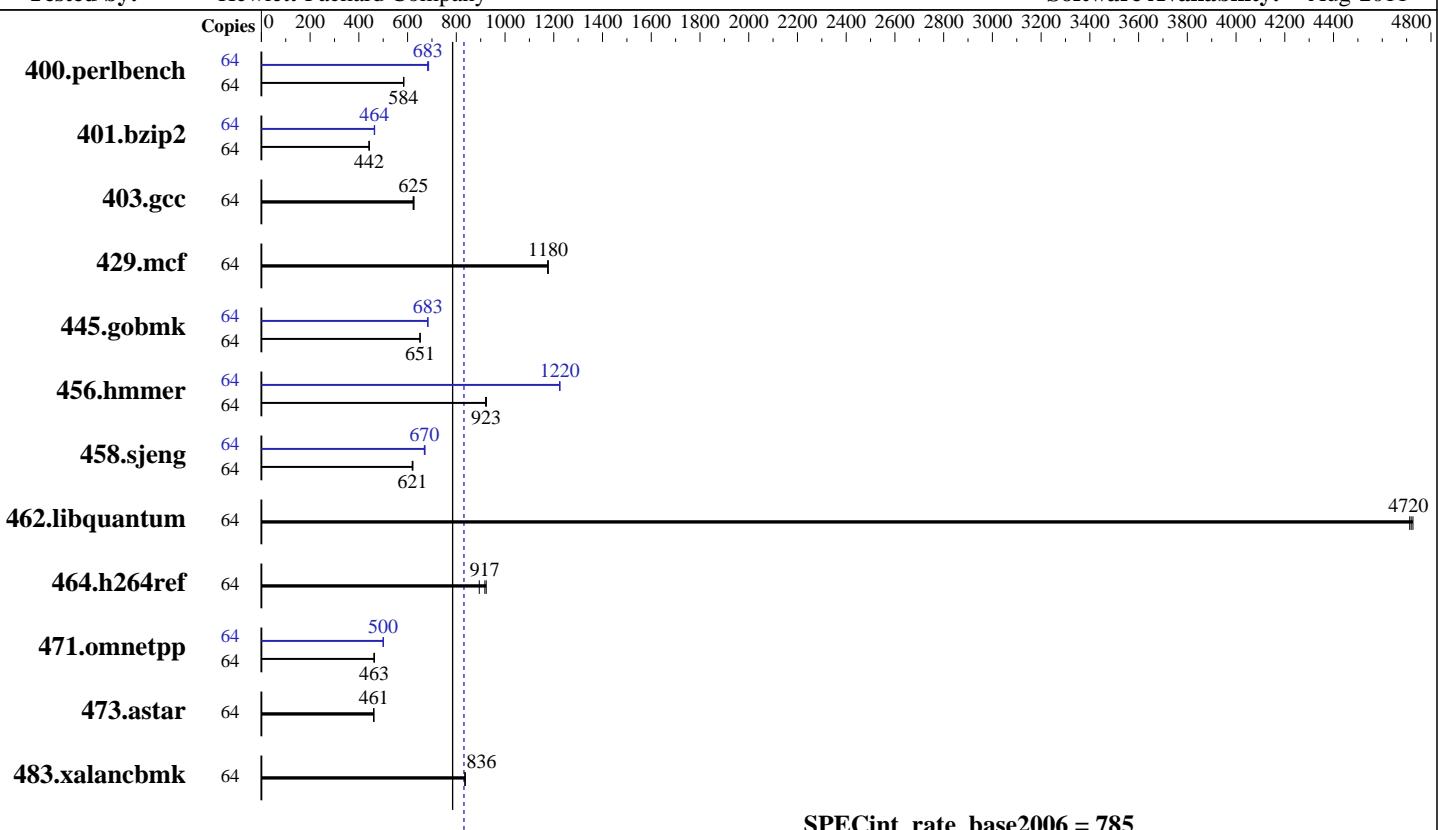

SPECint_rate_base2006 = 785

SPECint_rate2006 = 831

Hardware

CPU Name: Intel Xeon E7-4830
CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz: 2133
FPU: Integrated
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (64 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 146 GB 10 K SAS
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler: C/C++: Version 12.1.0.225 of Intel Compiler XE Build 20110803
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.13 GHz, Intel Xeon E7-4830)

SPECint_rate2006 = 831

SPECint_rate_base2006 = 785

CPU2006 license: 3

Test date: Sep-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1071	584	1071	584	1069	585	64	915	683	911	686	916	682
401.bzip2	64	1397	442	1395	443	1398	442	64	1333	463	1329	465	1330	464
403.gcc	64	822	626	825	625	827	623	64	822	626	825	625	827	623
429.mcf	64	497	1170	496	1180	496	1180	64	497	1170	496	1180	496	1180
445.gobmk	64	1031	651	1031	651	1031	651	64	983	683	983	683	984	683
456.hammer	64	647	923	649	920	647	924	64	488	1220	487	1220	488	1220
458.sjeng	64	1248	621	1246	622	1251	619	64	1158	669	1153	672	1156	670
462.libquantum	64	281	4720	281	4710	281	4730	64	281	4720	281	4710	281	4730
464.h264ref	64	1535	923	1544	917	1584	894	64	1535	923	1544	917	1584	894
471.omnetpp	64	862	464	864	463	866	462	64	800	500	800	500	799	501
473.astar	64	974	461	976	460	972	462	64	974	461	976	460	972	462
483.xalancbmk	64	529	835	528	836	528	837	64	529	835	528	836	528	837

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Stack size set to unlimited using "ulimit -s unlimited"

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.13 GHz, Intel Xeon E7-4830)

SPECint_rate2006 = 831

SPECint_rate_base2006 = 785

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2011

Hardware Availability: Apr-2011

Software Availability: Aug-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/smartheap -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.13 GHz, Intel Xeon E7-4830)

SPECint_rate2006 = 831

SPECint_rate_base2006 = 785

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2011

Hardware Availability: Apr-2011

Software Availability: Aug-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.13 GHz, Intel Xeon E7-4830)

SPECint_rate2006 = 831

SPECint_rate_base2006 = 785

CPU2006 license: 3

Test date: Sep-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 00:39:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 December 2011.