



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6234)

SPECint®\_rate2006 = 199

SPECint\_rate\_base2006 = 175

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

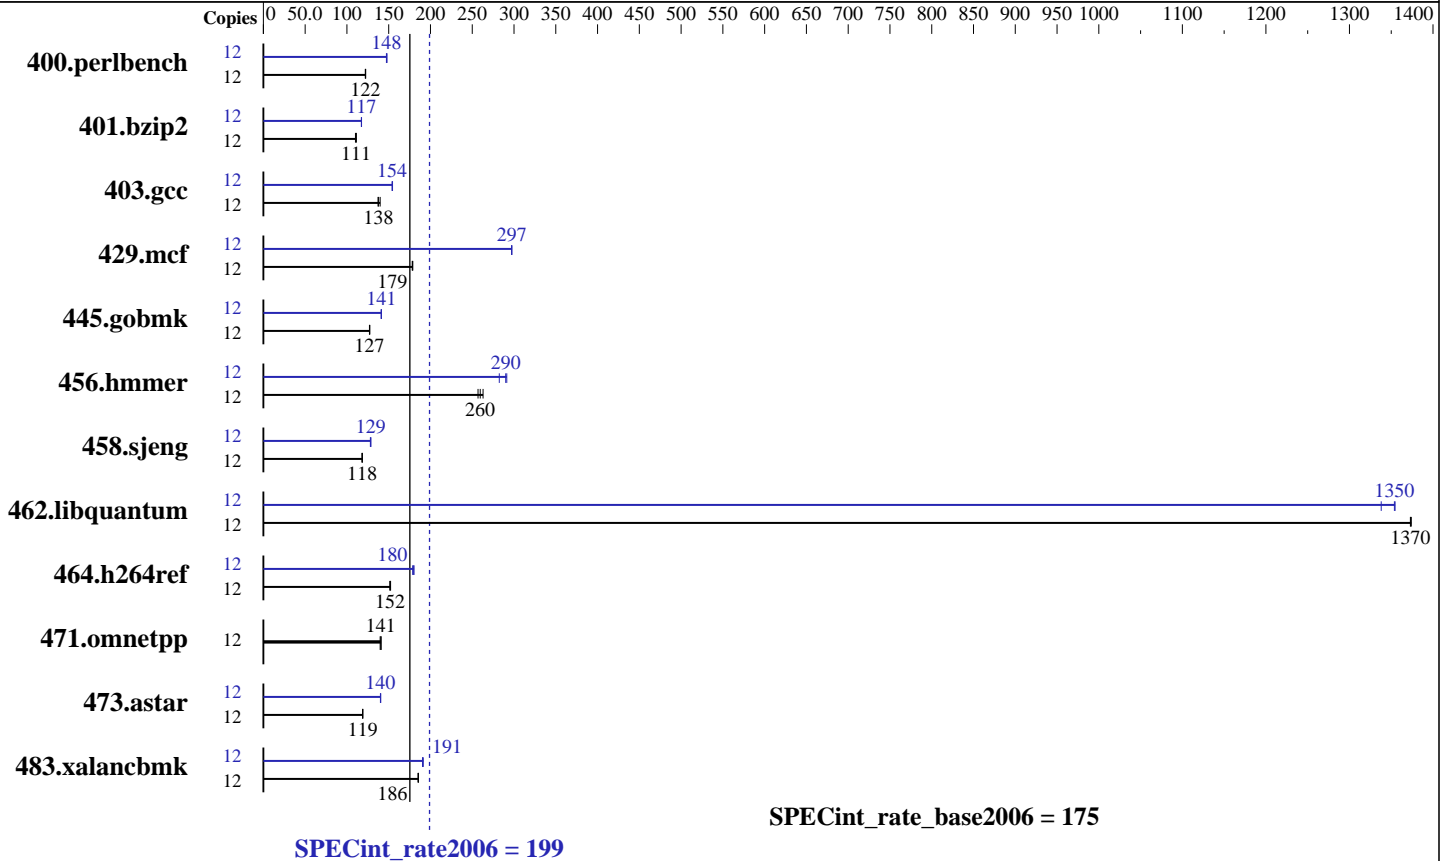

### Hardware

CPU Name: AMD Opteron 6234  
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 384 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SATA, 10000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 4.5.1 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6234)

SPECint\_rate2006 = 199

SPECint\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	961	122	958	122	<b>958</b>	<b>122</b>	12	796	147	<b>795</b>	<b>148</b>	792	148
401.bzip2	12	1041	111	<b>1044</b>	<b>111</b>	1051	110	12	<b>986</b>	<b>117</b>	986	117	987	117
403.gcc	12	<b>701</b>	<b>138</b>	704	137	691	140	12	<b>626</b>	<b>154</b>	625	155	626	154
429.mcf	12	<b>613</b>	<b>179</b>	614	178	612	179	12	368	297	<b>368</b>	<b>297</b>	368	297
445.gobmk	12	991	127	988	127	<b>991</b>	<b>127</b>	12	891	141	<b>891</b>	<b>141</b>	893	141
456.hammer	12	<b>431</b>	<b>260</b>	436	257	426	263	12	396	282	384	291	<b>386</b>	<b>290</b>
458.sjeng	12	1225	119	<b>1227</b>	<b>118</b>	1230	118	12	<b>1130</b>	<b>129</b>	1129	129	1134	128
462.libquantum	12	181	1370	<b>181</b>	<b>1370</b>	181	1370	12	186	1340	<b>184</b>	<b>1350</b>	184	1350
464.h264ref	12	1744	152	1754	151	<b>1750</b>	<b>152</b>	12	1472	180	1486	179	<b>1479</b>	<b>180</b>
471.omnetpp	12	<b>533</b>	<b>141</b>	537	140	532	141	12	<b>533</b>	<b>141</b>	537	140	532	141
473.astar	12	708	119	<b>708</b>	<b>119</b>	709	119	12	<b>600</b>	<b>140</b>	600	140	601	140
483.xalancbmk	12	446	186	<b>446</b>	<b>186</b>	447	185	12	435	190	433	191	<b>434</b>	<b>191</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=10752 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1104-rate-libs-revC/32:/usr/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6234)

SPECint\_rate2006 = 199

SPECint\_rate\_base2006 = 175

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2012  
Hardware Availability: Nov-2011  
Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6234)

SPECint\_rate2006 = 199

SPECint\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
               -IPA:plimit=20000 -OPT:unroll_times_max=8
               -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
               -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
               -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
            -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
            -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
          -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
          -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
          -INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
          -GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
            -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1
            -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
            -OPT:alias=disjoint -OPT:unroll_times_max=16
            -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
            -HP:bd=2m:heap=2m

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6234)

SPECint\_rate2006 = 199

SPECint\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:heap=2m:bd=2m  
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=16 -LNO:prefetch=2  
-LNO:prefetch\_ahead=4 -LNO:pf2=0 -CG:local\_sched\_alg=1  
-CG:p2align=0 -INLINE:aggressive=ON -IPA:plimit=15000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6234)

SPECint\_rate2006 = 199

SPECint\_rate\_base2006 = 175

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Nov-2011

**Software Availability:** Dec-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:12:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 May 2012.