



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]2006 = **71.7**

CELSIUS W520 (Intel Xeon E3-1280 v2)

SPECfp_base2006 = **69.6**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

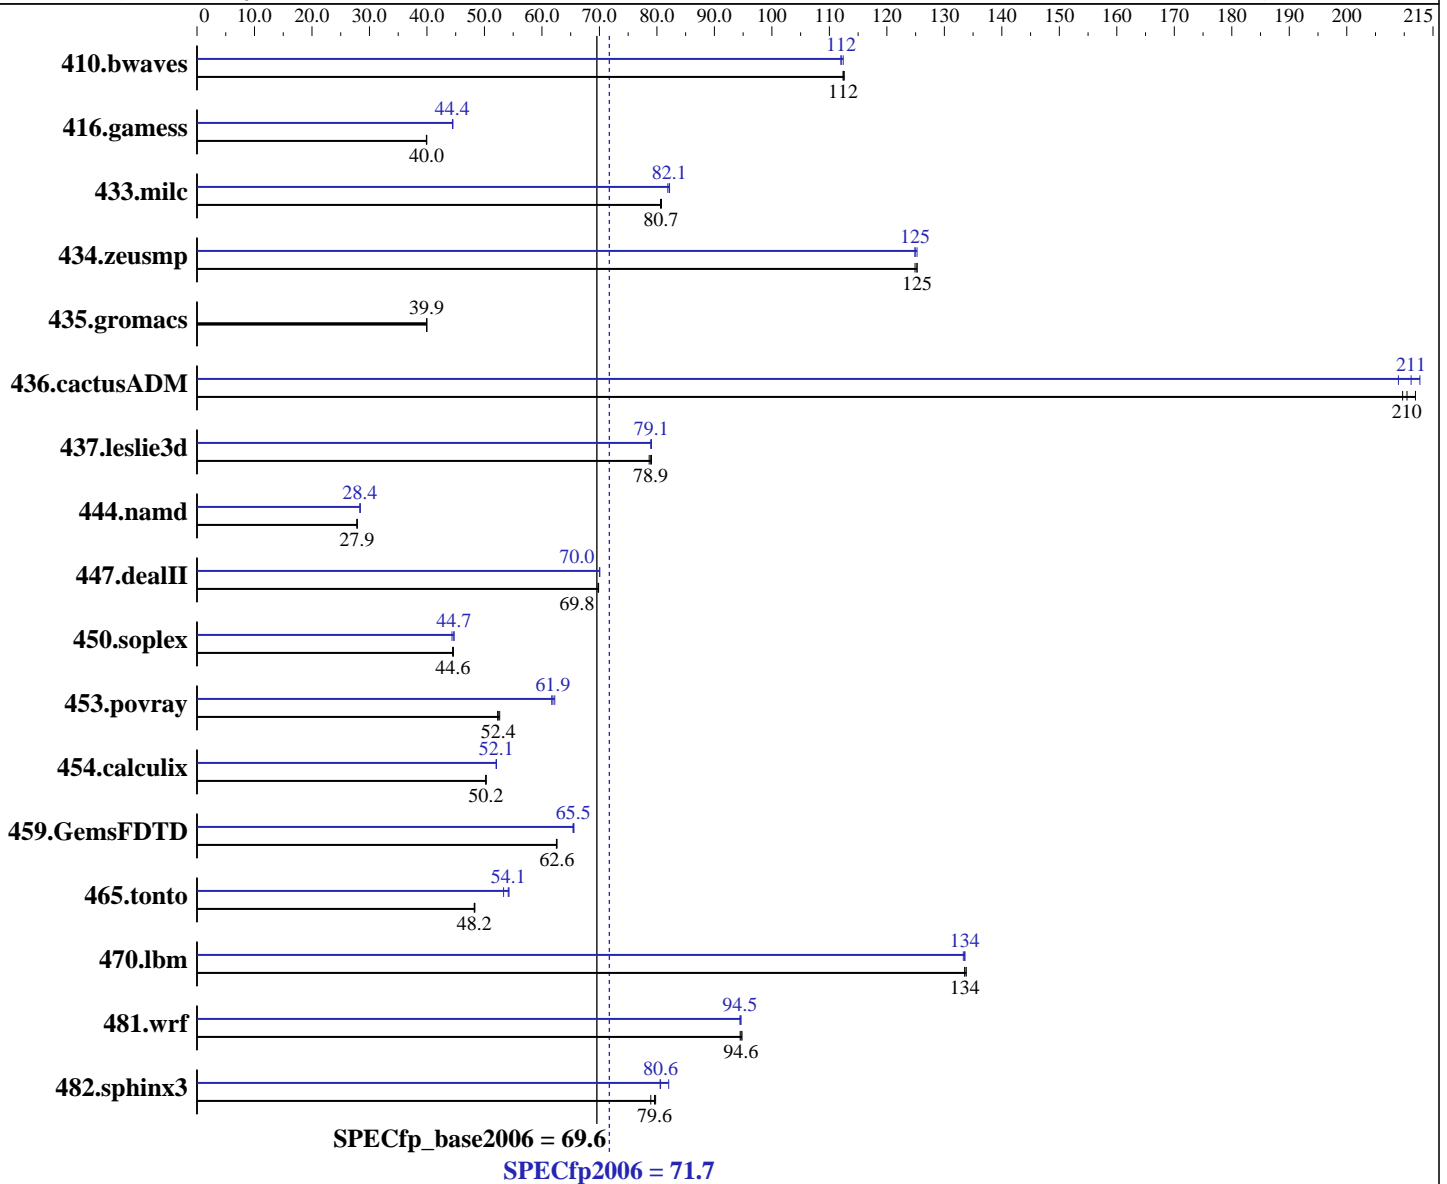

Hardware

CPU Name: Intel Xeon E3-1280 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi - user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = **71.7**

CELSIUS W520 (Intel Xeon E3-1280 v2)

SPECfp_base2006 = **69.6**

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x SATA III, 500 GB, 7200 rpm
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>121</u>	<u>112</u>	121	112	121	113	<u>121</u>	<u>112</u>	121	112	121	112
416.gamess	490	40.0	<u>490</u>	<u>40.0</u>	491	39.9	441	44.4	<u>441</u>	<u>44.4</u>	440	44.5
433.milc	114	80.6	114	80.8	<u>114</u>	<u>80.7</u>	112	81.9	<u>112</u>	<u>82.1</u>	112	82.2
434.zeusmp	72.9	125	72.7	125	<u>72.7</u>	<u>125</u>	<u>72.9</u>	<u>125</u>	72.9	125	72.7	125
435.gromacs	<u>179</u>	<u>39.9</u>	179	39.9	179	40.0	<u>179</u>	<u>39.9</u>	179	39.9	179	40.0
436.cactusADM	<u>56.8</u>	<u>210</u>	57.0	210	56.4	212	57.2	209	<u>56.6</u>	<u>211</u>	56.2	213
437.leslie3d	119	79.1	120	78.7	<u>119</u>	<u>78.9</u>	<u>119</u>	<u>79.1</u>	119	78.9	119	79.1
444.namd	<u>288</u>	<u>27.9</u>	288	27.8	288	27.9	283	28.4	<u>283</u>	<u>28.4</u>	283	28.4
447.dealII	<u>164</u>	<u>69.8</u>	164	69.9	164	69.8	163	70.1	<u>163</u>	<u>70.0</u>	163	70.0
450.soplex	<u>187</u>	<u>44.6</u>	188	44.5	187	44.6	187	44.7	<u>187</u>	<u>44.7</u>	188	44.4
453.povray	<u>102</u>	<u>52.4</u>	101	52.7	102	52.3	86.2	61.7	<u>85.9</u>	<u>61.9</u>	85.5	62.2
454.calculix	164	50.2	164	50.3	<u>164</u>	<u>50.2</u>	<u>158</u>	<u>52.1</u>	158	52.1	158	52.1
459.GemsFDTD	<u>170</u>	<u>62.6</u>	169	62.6	170	62.5	162	65.4	162	65.6	<u>162</u>	<u>65.5</u>
465.tonto	204	48.3	<u>204</u>	<u>48.2</u>	204	48.2	181	54.3	<u>182</u>	<u>54.1</u>	185	53.3
470.lbm	<u>103</u>	<u>134</u>	103	134	103	134	103	134	103	133	<u>103</u>	<u>134</u>
481.wrf	<u>118</u>	<u>94.6</u>	118	94.8	118	94.5	<u>118</u>	<u>94.5</u>	118	94.6	118	94.5
482.sphinx3	244	79.8	<u>245</u>	<u>79.6</u>	247	78.9	238	82.1	242	80.6	<u>242</u>	<u>80.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/work/cpu2006/libs/32:/work/cpu2006/libs/64"
 OMP_NUM_THREADS = "4"

Binaries were compiled on a system with
 2 x E5-2650 CPU + 96 GB memory using RHEL 6.2.

Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 71.7

CELSIUS W520 (Intel Xeon E3-1280 v2)

SPECfp_base2006 = 69.6

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 71.7

CELSIUS W520 (Intel Xeon E3-1280 v2)

SPECfp_base2006 = 69.6

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Dec-2011

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: -xAVX -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -ansi-alias

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-static

450.soplex: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
-ansi-alias

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 71.7

CELSIUS W520 (Intel Xeon E3-1280 v2)

SPECfp_base2006 = 69.6

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: -xAVX -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch

437.leslie3d: Same as 434.zeusmp

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: -xAVX -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -ansi-alias

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: Same as 436.cactusADM

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 71.7

CELSIUS W520 (Intel Xeon E3-1280 v2)

SPECfp_base2006 = 69.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:45:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.